

# IOWA COMMUNICATIONS NETWORK

MANCHESTER HIGH SCHOOL TO DELAWARE COUNTY SHERIFF'S OFFICE INFRASTRUCTURE SOLUTIONS

FIBER INSTALLATION DELAWARE COUNTY, MANCHESTER, IOWA 605 N NEW ST TO 1225 W HOWARD ST

509 SOUTH GILBERT STREET IOWA CITY, IA 52240 PHONE: (319) 338-7557 STATE OF IOWA, DEPARTMENT OF LABOR REGULATION NO. 00527328

### PROJECT INFORMATION

SCOPE OF WORK:

THIS PROJECT IS FOR NEW CONDUIT AND FIBER OPTIC CABLE INSTALLATION FOR THE DELAWARE COUNTY SHERIFF'S OFFICE FROM WEST DELAWARE HIGH SCHOOL TO THE DELAWARE COUNTY SHERIFF'S OFFICE. IT WILL INVOLVE APPROXIMATELY 10,179' OF NEW CONDUIT INSTILLATION, 10,811' OF THE NEW CABLE INSTALLATION IN NEW CONDUITS AND EXISTING BUILDING ENTRY CONDUITS PER THE DETAILED PLAN SHEETS

### CONTACT PERSON:

TIM FLICKINGER IOWA COMMUNICATIONS NETWORK (ICN) PHONE: (515) 725-4699

NICK FREERKS HBK ENGINEERING 509 S. GILBERT STREET IOWA CITY, IA 52240 PHONE: (319) 338-7557

nfreerks@hbkengineering.com

timothy.flickinger@icn.state.ia.us

DELAWARE COUNTY SHERIFF'S OFFICE PHONE: (563) 920-0001 DELCS.911@GMAIL.COM

# **LOCATION MAP** Creek PROJECT LOCATION

### **INDEX OF SHEETS**

SHEET	TITLE
1	TITLE SHEET
2	ENGINEER GENERAL NOTES AND LEGEND
3	ICN GENERAL NOTES
4	MATERIALS
	CIVIL
5-31	PLAN SHEETS
32-37	DETAIL SHEETS

UTILITY CONTACTS					
COMPANY	CONTACT NAME	PHONE	PHONE		
ALLIANT ENERGY (ANE)	FIELD ENGINEER	(800) 255-4268	LOCATE_IPL@ALLIANTENERGY.COM		
MEDIACOM (AT6)	BRIAN KADNER	(845) 544-9656	BKADNER@MEDIACOMCC.COM		
CENTURYLINK (CTLIA01)	SADIE HULL	(918) 547-0147	SADIE.HULL@LUMEN.COM		
IOWA DEPARTMENT OF TRANSPORTATION (EC5)	JOE KILLBURG	(563) 582-3063	JOE.KILBURG@DOT.IOWA.GOV		
HAWKEYE TELEPHONE COMPANY (HE2)	CRAIG SCHMITT	(563) 412-9765	CRAIG.SCHMITT@HAWKEYETELEPHONE.COM		
IOWA COMMUNICATIONS NETWORK (ICN)	SHANNON MARLOW	(800) 572-3940	ICNOUTSIDEPLANTIOWAONECALL@IOWA.GOV		
MANCHESTER CITY OF (MAY)	TIMOTHY VICK	(563) 927-3636	TVICK@MANCHESTER-IA.ORG		
MNA/BLUEBIRD (MNB01)	JAMIE SCOTT	(314) 270-8738	JAMES.SCOTT@BLUEBIRDNETWORK.COM		
BLACK HILLS ENERGY MANCHESTER (PN9)	BRIAN MCWILLIAMS	(563) 927-1017	BRIAN.MCWILLIAMS@BLACKHILLSCORP.COM		
UNITE PRIVATE NETWORKS, LLC (UPN)	JOE KILZER	(816) 425-3556	UPNGIS@UPNFIBER.COM		
WEST DELAWARE COUNTY SCHOOL DISTRICT (WDD)	GARY FONCK	(563) 920-4114	GARYFONCK@W-DELAWARE.K12.IA.US		
WINDSTREAM COMMUNICATIONS (WINIA)	LOCATE DESK	(800) 289-1901	LOCATE.DESK@WINDSTREAM.COM		

CALL 811 FOR LOCATION OF UNDERGROUND TELEPHONE, ELECTRIC, GAS MAINS, CABLE TELEVISION AND OTHER UTILITIES.

EXISTING UNDERGROUND AND OVERHEAD UTILITIES AND DRAINAGE STRUCTURES HAVE BEEN PLOTTED FROM AVAILABLE INFORMATION AND THEREFORE. THEIR LOCATIONS MUST BE CONSIDERED APPROXIMATE ONLY. IT IS THE RESPONSIBILITY OF THE INDIVIDUAL CONTRACTORS TO EXACTLY LOCATE AND PROTECT EACH EXISTING UTILITY BEFORE AND DURING ACTUAL CONSTRUCTION.



I	DELAWARE	COUNTY	SHERIFF'S	OFFICE
	FIBER INST	ALLATION		





60% REVIEW FOR PERMIT REVIEW 07/06/2023 FOR FINAL PERMIT REVIEW 07/12/2023

SIZE: 11" X 17" TITLE SHEET

IOWA COMMUNICATIONS NETWORK
400 EAST 14TH STREET
GRIMES STATE OFFICE BUILDING DES MOINES, IOWA 50319
ICN © 2021, COPY WITH PERMISSION PAGE 1 OF 37

\*THIS CONTACT LIST IS NOT ALL-INCLUSIVE. CONTRACTOR IS RESPONSIBLE FOR REQUESTING LOCATES OF ALL UTILITIES

OSP PROJECT LOG #: 28210105 LINK NAME: 0122 FILE: H:\Project\230437\dwg\23-0424 TITLE.dwg SCALE: NONE

ALL CONDUIT AND HANDHOLE INSTALLATIONS, REMOVALS, MODIFICATIONS, AND TEMPORARY WORK SHALL BE DONE ACCORDING TO THE FOLLOWING NON-INCLUSIVE CONDITIONS: SECTION 1.0 SCOPE OF WORK

- 1.01 INSTALLATION DESCRIPTION:
  - INSTALL CONDUIT AND ALL RELATED APPURTENANCES FOR FIBER OPTIC CABLE INSTALLATION. SEE PLANS FOR EXACT LOCATION, LENGTHS, QUANTITIES, AND DIMENSIONS OF PROPOSE IMPROVEMENTS.
- 1.02 SEE SHEET 4 FOR LOCATION OF ENGINEER'S ESTIMATE OF MATERIALS.
- 1.03 THE CONTRACTOR SHALL PROVIDE ALL MATERIAL, EQUIPMENT, LABOR, INSTALLATION, RESTORATION, UTILITY RELOCATION CHARGES, JOB SITE DELIVERY COSTS AND INCIDENTALS TO COMPLETE THE DESCRIBED OR ILLUSTRATED WORK, UNDER THIS CONTRACT
- .04 ANY CHANGE-ORDER REQUEST MUST BE PRESENTED IN WRITING TO THE OWNER'S REPRESENTATIVE AND APPROVED PRIOR TO PROCEEDING WITH THE REQUESTED CHANGE. DOCUMENTATION CONCERNING ANY AND ALL CHANGE ORDERS WILL BE REDUCED TO FORMAL RECORD, FILED WITH THE OWNER'S REPRESENTATIVE, AND BE MADE AVAILABLE FOR FUTURE REFERENCE.
- 1.05 THE CONTRACTOR SHALL PROVIDE A MINIMUM 48 HOUR ADVANCED NOTICE TO HBK ENGINEERING (319-338-7557) TO SCHEDULE A PRE-CONSTRUCTION WALK THROUGH WITH A HBK ENGINEERING REPRESENTATIVE. THIS WALK THROUGH MUST BE COMPLETED PRIOR TO THE COMMENCEMENT OF ANY WORK WITHIN THE LIMITS OF THIS PROJECT
- .06 THE ENGINEER WILL NOT BE RESPONSIBLE NOR ASSUME ANY LIABILITY FOR NEGLIGENT ACTS OR ERRORS OF OMISSIONS OF ANY CONTRACTOR, ANY SUBCONTRACTOR, OR ANY OF THE CONTRACTOR'S OR SUBCONTRACTORS' AGENTS OR EMPLOYEES OR ANY OTHER PERSONS (EXCEPT ENGINEER'S OWN EMPLOYEES) AT THE PROJECT SITE OR OTHERWISE PERFORMING ANY OF THE WORK OF THE PROJECT. ANY CONTRACTOR OR SUBCONTRACTOR, AS WELL AS THE ENGINEER, WILL BE RESPONSIBLE FOR HIS OWN SAFETY PROGRAM. NEITHER THE PROFESSIONAL ACTIVITIES OF THEENGINEER, NOR THE PRESENCE OF THE ENGINEER OR HIS OR HER EMPLOYEES AND SUB-CONSULTANTS AT THE CONSTRUCTION SITE, SHALL RELIEVE ANY CONTRACTOR OF HIS OR HER OBLIGATIONS. DUTIES AND RESPONSIBILITIES INCLUDING. BUT NOT LIMITED TO, CONSTRUCTION MEANS, METHODS, SEQUENCE, TECHNIQUES OR PROCEDURES NECESSARY FOR PERFORMING, SUPERINTENDING OR COORDINATING ALL PORTIONS OF THE WORK OF CONSTRUCTION IN ACCORDANCE WITH THE CONTRACT DOCUMENTS AND ANY HEALTH OR SAFETY PRECAUTIONS REQUIRED BY ANY REGULATORY AGENCIES. THE ENGINEER AND HIS OR HER PERSONNEL HAVE NO AUTHORITY TO EXERCISE ANY CONTROL OVER ANY CONSTRUCTION CONTRACTOR OR OTHER ENTITY OR THEIR EMPLOYEES IN CONNECTION WITH ANY HEALTH OR SAFETY PRECAUTIONS.

### SECTION 2.0 MATERIALS

- 2.01 ALL MATERIALS INSTALLED WITHIN THE LIMITS OF THIS PROJECT SHALL BE IN CONFORMANCE WITH STANDARD RECOMMENDATIONS OF THE NATIONAL ELECTRICAL MANUFACTURER'S ASSOCIATION (NEMA) AND AMERICAN NATIONAL STANDARDS INSTITUTE (ANSI)
- 2.02 ALL TRENCHED CONDUIT, ELBOWS, AND COUPLINGS SHALL BE HDPE UNLESS OTHERWISE NOTED. ALL BORED CONDUIT AND COUPLINGS SHALL BE HDPE SDR-13 UNLESS OTHERWISE NOTED
- 2.03 JOB SITE MATERIAL WILL BE DELIVERED TO AND MAINTAINED AT THE STREET WORK AREAS IN A WELL MANAGED MANNER. TO MINIMIZE CONGESTION OR INCONVENIENCE TO OTHER WORKERS. OR CONTRACTORS WORKING UNDER ALTERNATE PERMITS.

### SECTION 3.0 GENERAL NOTES

- 3.01 CONTRACTOR IS ADVISED TO READ ALL NOTES ON DRAWINGS, CAREFULLY.
- 3.02 THE CONTRACTOR SHALL VERIFY EXISTING STREET RIGHTS OF WAY TO THE EXTENT NECESSARY TO VERIFY PROPOSED WORK REMAINS WITHIN THESE RIGHTS OF WAY AND DOES NOT INFRINGE ONTO PRIVATE PROPERTY NOT OWNED BY THE OWNER
- 3.03 SCALE FOR DRAWINGS IS FOR GENERAL INFORMATION ONLY, LOCATIONS AND DIMENSIONS SHALL BE TAKEN AS SHOWN AND THE DRAWINGS SHALL NOT BE SCALED.
- 3.04 CONTRACTOR SHALL COORDINATE ALL WORK WITH ALL PUBLIC AND PRIVATE UTILITIES AS WELL AS CITY AND STATE AGENCIES.
- 3.05 INSTALL CONDUIT MINIMUM OF 10'-0" BELOW ALL WATERWAYS AND CULVERT CROSSINGS. CONTRACTOR TO VERIFY CULVERT DEPTH PRIOR TO CONDUIT INSTALLATION
- 3.06 NUMEROUS ELEVATION CHANGES. TOPOGRAPHY LINES SHOWN ON DRAWING FOR REFERENCE ONLY.
- 3.07 DUE TO EXISTING FORESTED AREAS, SOME TREE REMOVAL AND TRIMMING REQUIRED FOR CONDUIT OR HANDHOLE INSTALLATION WITHIN THE RIGHT-OF-WAY
- 3.08 RIGHT OF WAY LOCATIONS ARE APPROXIMATE. FIBER INSTALLATION 6'-0" MINIMUM OFF RIGHT-OF-WAY

### SECTION 4.0 SAFETY

- 4.01 CONTRACTOR SHALL TAKE ALL NECESSARY SAFETY PRECAUTIONS TO PROTECT UTILITIES. PEDESTRIANS WORKERS AND VEHICULAR TRAFFIC. THE CONTRACTOR SHALL PROVIDE TEMPORARYFENCES, BARRICADES, ETC. AS REQUIRED TO PROTECT ADJACENT PROPERTY AND THE PUBLIC DURING ALL PHASES OF
- 4.02 THE CONTRACTOR SHALL PROVIDE ALL TEMPORARY BARRICADES, SIGNAGE, WARNING LIGHTS AND OTHER DEVICES AND KEEP ALL TRAFFIC CONTROL OPERATIONAL 24 HOURS A DAY AT ALL OPEN TRENCH LOCATIONS AND AT LOCATIONS WHICH DO NOT HAVE A FINISHED SURFACE OR ROAD PLATES
- 4.03 THE CONTRACTOR SHALL COORDINATE INGRESS AND EGRESS TO ADJACENT PROPERTIES AND/OR CONSTRUCTION AFFECTED BY THE PROPOSED WORK

### SECTION 5.0 EXISTING UTILITIES

- 5.01 EXISTING CONDITIONS, STRUCTURES, UTILITIES AND SURFACE FEATURES SHOWN WERE OBTAINED FROM UTILITY ATLASES AND FROM DRAWINGS FURNISHED BY THE VARIOUS UTILITIES AND ARE ASSUMED TO BE ACCURATE AND CORRECT. THE CONTRACTOR SHALL PERFORM HIS OWN SURVEY AND VERIFY ALL EXISTING CONDITIONS AND DIMENSIONS OF EXISTING STRUCTURES PRIOR TO STARTING ANY WORK.
- 5.02 FOR BORED INSTALLATIONS, THE CONTRACTOR SHALL PERFORM TEST HOLES AT ALL UTILITY CROSSINGS TO VERIFY THE LOCATION AND ELEVATION OF ALL UTILITIES PRIOR TO ANY EXCAVATION, AND TO LOCATE ANY POSSIBLE OBSTRUCTIONS. ALL TEST HOLES SHALL BE CONSIDERED INCIDENTAL TO THE CONTRACT
- 5.03 FOR TRENCHED INSTALLATIONS, THE CONTRACTOR SHALL PERFORM TEST HOLES PER PLAN OR AS DEEMED NECESSARY TO VERIFY THE LOCATION AND ELEVATION OF ALL UTILITIES PRIOR TO ANY EXCAVATION, AND TO LOCATE ANY POSSIBLE OBSTRUCTIONS. ALL TEST HOLES SHALL BE CONSIDERED INCIDENTAL TO THE
- 5.04 THE CONTRACTOR SHALL FIELD VERIFY LOCATIONS OF ALL OVERHEAD OBSTRUCTIONS PRIOR TO THE COMMENCEMENT OF WORK
- 5.05 EXISTING UTILITIES ARE SHOWN AT THEIR APPROXIMATE LOCATION. THE CONTRACTOR SHALL CONTACT IOWA ONE CALL AT 1(800)-292-8989 A MINIMUM OF 48 HOURS (EXCLUDING WEEKENDS AND GOVERNMENT HOLIDAYS) PRIOR TO COMMENCEMENT OF ANY PAVEMENT CUTS OR EXCAVATION TO REQUEST LOCATING AND MARKING OF EXISTING UTILITIES PRIOR TO PERFORMING ANY EXCAVATION WORK IN OR AROUND ANY
- 5.06 ALL EXCAVATION WORK NEAR AND AROUND EXISTING STRUCTURES AND UTILITIES SHALL BE BY HAND METHOD.
- 5.07 ALL DISCREPANCIES SHOULD BE REPORTED TO ENGINEER OF RECORD AT HBK ENGINEERING (319-338-7557). ANY QUESTIONS OR COMMENTS THE CONTRACTOR MAY HAVE ARE TO BE DISCUSSED WITH THE OWNER AND ENGINEER PRIOR TO CONSTRUCTION.
- 5.08 FURTHER, THE CONTRACTOR SHALL RECORD THE LOCATION AND ELEVATION OF ALL UTILITIES ENCOUNTERED, AND INSTALLATION OF NEW WORK, AS THE WORK PROGRESSES AND SHALL PREPARE RECORD DRAWINGS (RED-LINES) BASED ON HIS RECORDS. AS PART OF THE RECORD DRAWINGS CONTRACTOR SHALL ALSO PROVIDE HORIZONTAL AND VERTICAL CONFIGURATION OF CONDUITS WHERE MULTIPLE CONDUITS ARE INSTALLED. THESE RECORDS TO BE SUPPLIED TO HBK ENGINEERING, LLC AT COMPLETION OF WORK
- 5.09 AT SEWER DRAINS FROM HOMES OR OTHER BUILDINGS, IF THERE IS INTERFERENCE, REPLACE INKIND. IN ALL CASES WHERE SEWER WORK IS DONE, A PERMIT SHOULD BE OBTAINED AND A SEWER INSPECTOR SHOULD BE PRESENT DURING THE WORK
- 5.10 CONTRACTOR SHALL SUPPORT ALL WATER MAINS IN EXCESS OF 12" IN DIAMETER WITH A PERMANENT TYPE OF STRUCTURE UNLESS OTHERWISE NOTIFIED BY THE WATER DEPARTMENT, AND IS INCLUDED IN COST FOR DOING THE WORK. AT NO TIME DURING CONSTRUCTION SHALL WATER MAINS GO UNSUPPORTED FOR A
- 5.11 CONTRACTOR RESPONSIBLE FOR OBTAINING AND PROVIDING REVIEW AND DESIGN OF ANY AND ALL TEMPORARY UTILITY SUPPORT SYSTEMS PRIOR TO CONSTRUCTION.
- 5.12 CONTRACTOR SHALL NOTIFY ALLIANT IN SITUATIONS WHERE STEEL PIPE CONDUCTOR IS NICKED DURING EXCAVATION. ALLIANT WILL EVALUATE THE EXTENT OF THE DAMAGE SO AS TO DETERMINE WHETHER REPAIR IS REQUIRED PRIOR TO BACKFILL AND GRADE SURFACE RESTORATION.

- NO STORAGE OF EQUIPMENT OR MATERIALS IN THE ROADWAY IS PERMITTED UNLESS THE CONTRACTOR OBTAINS WRITTEN PERMISSION FROM THE CITY, STATE, AND/OR GOVERNING BODY.
- 6.02 THE CONTRACTOR SHALL MARK ALL OPENINGS ON THE SURFACE PRIOR TO THE COMMENCEMENT OF EXCAVATION. ALL OPENINGS ON PAVED SURFACES SHALL BE SAW CUT PRIOR TO REMOVAL OF PAVEMENT.
- 6.03 CONTRACTOR RESPONSIBLE FOR OBTAINING AND PROVIDING REVIEW AND DESIGN OF ANY AND ALL SHORING SYSTEMS PRIOR TO CONSTRUCTION.
- 6.04 CONTRACTOR SHALL ASSUME ALL ELECTRICAL CABLES ARE ENERGIZED AND SHALL BE SUPPORTED SO AS NOT TO STRESS ANY PORTION OF THE CABLE.
- 6.05 CONTRACTOR SHALL PROVIDE APPROPRIATE ENGINEERED DE-WATERING MEASURES, IF NECESSARY, TO ENSURE GROUNDWATER TABLE REMAINS AT A DEPTH BELOW THE BASE OF THE EXCAVATION AT ALL TIMES DURING EXCAVATION, INSTALLATION AND BACKFILLING OPERATIONS
- 6.06 THE ENGINEER SHALL BE NOTIFIED FOR RESOLUTION OF SITUATIONS WHERE CONDUIT DEPTH BELOW GRADE DEVIATES BY MORE THAN 3" AS CURRENTLY SHOWN ON PLAN/PROFILE DRAWINGS
- 6.07 THE ENGINEER SHALL ALSO BE NOTIFIED FOR DISPOSITION OF SITUATIONS WHERE THE CONDUIT CANNOT MAINTAIN SEPARATIONS PER PLAN

### SECTION 7.0 RESTORATION

- 7.01 THE CONTRACTOR SHALL OBTAIN A PERMIT TO PERFORM ALL RESTORATION WORK IN THE CONTRACTOR'S NAME. ALL PAVING SHALL BE COMPLETED WITHIN 15 WORKING DAYS AFTER EXCAVATION IS BACKFILLED UNLESS OTHERWISE ARRANGED IN ADVANCE WITH GOVERNING AGENCY
- 7.02 CONTRACTOR SHALL BREAK OUT SIDEWALK, DRIVEWAY, CURB AND GUTTER, PAVEMENT AND RESTORE TO PERMANENT CONDITION. CONTRACTOR TO CONFORM CONCRETE TO COLOR, FINISH, AND TEXTURE OF
- 7.03 THE CONTRACTOR IS RESPONSIBLE FOR THE RESTORATION OF THE AREAS DISTURBED BY CONSTRUCTION ACTIVITIES, CONTRACTOR TO PAY ALL FEES AND OBTAIN ALL PERMITS FOR RESTORATION.
- 7.04 THE CONTRACTOR IS TO RESTORE ALL DAMAGED STRUCTURES AND UTILITIES TO THE SATISFACTION OF THE FACILITY OWNER, IN THE EVENT THAT DAMAGE OCCURS.

### I FGFND

FENCE	— x — x — x
EXISTING ROW LINE	
EXISTING FIBER OPTIC LINE	— FO— FO—
EXISTING OVERHEAD LINE	— OH—— OH—
EXISTING STORM DRAIN	—— SD——— SD——
EXISTING ELECTRIC (BURIED) EXISTING GAS LINE	— E — E —
EXISTING GAS LINE EXISTING STORM SEWER	— G — G —
EXISTING SANITARY SEWER	- > > - ) )
EXISTING WATER LINE	v v
EXISTING ICN FIBER	
EXISTING ICN (AERIAL)	— A —
EXISTING ICN CONDUIT	
TO BE ABANDONED	
PROPOSED ICN FIBER	
PROPOSED AERIAL	— A —
PROPOSED ICN CONDUIT	
CENTERLINE OF ROAD	
EXISTING WATERWAY BOUNDARY PROPOSED ICN HANDHOLE	
	HH
EXISTING ICN HANDHOLE	HH
PROPOSED HANDHOLE (BY OTHERS)	HH
EXISTING STORM CULVERT LOCATION	
EXISTING STORM MANHOLE	(ST)
EXISTING STORM INLET	
EXISTING SANITARY MANHOLE	SS
EXISTING SANITARY CLEAN OUT	<u> </u>
EXISTING FIBER OPTIC MANHOLE	FO
EXISTING FIBER OPTIC HANDHOLE	FO
EXISTING COMMUNICATIONS MANHOLE	©
EXISTING COMMUNICATIONS HANDHOLE	
EXISTING COMMUNICATIONS PEDESTAL	
EXISTING ELECTRIC MANHOLE	(E)
EXISTING ELECTRIC TRANSFORMER	<u>[E]</u>
EXISTING ELECTRIC PEDESTAL	E
EXISTING ELECTRIC HANDHOLE	E
EXISTING UTILITY POLE	Ø
EXISTING GUY ANCHOR	$\leftarrow$
EXISTING LIGHT POLE	<b>\$</b>
EXISTING WATER MANHOLE	w
EXISTING WATER VALVE	<b>⊗</b>
EXISTING MONITORING WELL	<b>(M</b> )
	_
EXISTING FIRE HYDRANT	Q
EXISTING NATURAL GAS MANHOLE	<u>©</u>
EXISTING NATURAL GAS VALVE	⊗
EXISTING TREE	रिजे



FIBER INSTALLATION 60% REVIEW 05/19/2023 FOR PERMIT REVIEW 07/06/2023

FOR FINAL PERMIT REVIEW

hbk (icn IOWA COMMUNICATIONS NETWORK

400 EAST 14TH STREET GRIMES STATE OFFICE BUILDING DES MOINES, IOWA 50319 ICN © 2021, COPY WITH PERMISSION

.3

SCALE: NONE

### STANDARD INSTALLATION REQUIREMENTS:

### GENERAL REQUIREMENTS:

- 1. THE CONTRACTOR SHALL POTHOLE ALL EXISTING UTILITIES
- 2. PROVIDE THE OWNERS OF ANY NATURAL GAS UTILITY 48 HOURS ADVANCE NOTICE THAT WORK IS SCHEDULED IN THE VICINITY OF THEIR LINES/MAINS SO THAT THEY CAN PROVIDE STANDBY AND PROTECT SERVICES.
- 3. MAINTAIN PROOF OF NOTIFICATION TO AND RECEIPT OF NOTIFICATION BY THE GAS UTILITY.
- 4. PERMITS AND COORDINATION
- 4.1. SECURE ALL NECESSARY STATE AND LOCAL (CITY, COUNTY, ETC.) PERMITS, PUBLIC OR PRIVATE EASEMENTS, FACILITY PERMITS, USAGE PERMITS, AND ANY OTHER PERMIT REQUIRED BY AN AUTHORITY HAVING JURISDICTION (AHJ). ALL CONTRACTORS AND SUBCONTRACTORS MUST BE LICENSED AND BONDED WITH THE
- 4.2. ICN WILL OBTAIN AND PROVIDE COPIES OF IDOT PERMITS.
- 4.3. IF PERMITS ARE REQUIRED TO BE IN THE NAME OF THE OWNER RATHER THAN THE CONTRACTOR. THE CONTRACTOR SHALL PREPARE THE PERMIT FOR THE OWNER'S SIGNATURE
- 4.4. COORDINATE INSTALLATION WITH ALL OWNERS AND AHJ OVER THE ROUTE, THE FIBER, RIGHT-OF-WAY AND BUILDINGS IN WHICH END POINTS WILL BE LOCATED.
- 4.5. FAILURE TO COORDINATE WITH THE AHJ AND TO OBTAIN ALL NECESSARY PERMITS IS AT THE PERIL OF THE CONTRACTOR
- 4.6. RIGHT-OF-WAY PERMIT FEES ARE AN AUTHORIZED EXTRA ABOVE THE QUOTED BID PRICE. EXCAVATION PERMITS SHALL BE BY THE CONTRACTOR.
- 4.7. ENSURE ALL FACILITIES ARE PLACED WITHIN THE PUBLIC RIGHT-OF-WAY.
- 5. ENSURE THAT PERSONNEL WORKING IN THE ROW ARE EQUIPPED WITH AND USE PROPER SAFETY EQUIPMENT
- 6. ALL TOOLS AND TEST EQUIPMENT REQUIRED TO DO A PROJECT SHALL BE PROVIDED BY THE CONTRACTOR OR ITS SUBCONTRACTOR(S). SECURITY OF TOOLS AND TEST FOUIPMENT SHALL BE THE RESPONSIBILITY OF FACH WORKER. THE ICN SHALL NOT BE RESPONSIBLE FOR THE SECURITY OF ANY PROPERTY LEFT ON ICN'S PROPERTY OR ON PROPERTY CONTROLLED BY THE ICN OR THE STATE OF IOWA.
- 7. CONTRACTOR SHALL BE RESPONSIBLE FOR INSTRUCTING ITS EMPLOYEES IN SAFETY MEASURES CONSIDERED APPROPRIATE FOR THE JOB. IN ADDITION, THE CONTRACTOR SHALL NOT PERMIT PLACING OR USE OF TOOLS OR MATERIALS IN TRAFFIC LANES OR OTHER LOCATIONS. THE TOOLS OR MATERIALS SHALL NOT BE PLACED IN SUCH A MANNER SO AS TO CREATE SAFETY HAZARDS TO STATE EMPLOYEES, CONTRACTING AGENCY EMPLOYEES, THE PUBLIC OR THEMSELVES.
- 8. EXCAVATIONS AND TRENCHES: THE ICN REQUIRES ALL OPEN EXCAVATIONS OR TRENCHES TO BE MONITORED AND ATTENDED TO DURING CONSTRUCTION PER. THE ICN REQUIRES ALL OPEN EXCAVATIONS AND TRENCHES BACKFILLED THE SAME DAY. IF THE CONTRACTOR IS REQUIRED TO LEAVE AN EXCAVATION OR TRENCH OPEN. THEN THE CONTRACTOR SHALL PROPERLY FENCE AND/OR COVER THE EXCAVATION FOR SAFETY. CONTRACTOR SHALL FOLLOW ALL OSHA REQUIREMENTS FOR EXCAVATION AND TRENCH SAFETY.
- 9. CONTRACTOR AND ITS EMPLOYEES SHALL COMPLY WITH ALL OSHA REGULATIONS. THE CONTRACTOR SHALL COMPLY WITH ALL APPLICABLE STATE AND FEDERAL LAWS.
- 10. CONTRACTOR SHALL COMPLY WITH ALL IOWA ONE CALL REQUIREMENTS AS PROVIDED BY IOWA CODE, CHAPTER 480.
- 11. PROVIDE ALL LABOR AND SUPERVISION FOR THE PROJECT.
- 12. PROVIDE AND INSTALL MATERIALS NEEDED TO RESULT IN A FULLY FUNCTIONAL SYSTEM MEETING ICN STANDARDS, WHETHER OR NOT THE MATERIALS OR METHODS ARE SPECIFICALLY MENTIONED IN THIS DOCUMENT, SEE THE LIST OF ICN-FURNISHED MATERIALS.
- 13. INSTALL CABLE ROUTE MARKERS FURNISHED BY ICN. WHERE POSSIBLE, INSTALL MARKERS ADJACENT TO POLES, BUILDINGS OR IN OTHER PROTECTED AREAS.
- 14. A COPY OF THIS SCOPE OF WORK AND THE ENGINEERING PLAN FOR THIS PROJECT SHALL BE ON SITE AND AVAILABLE ANY TIME WORK IS BEING PERFORMED. FAILURE TO HAVE THE REQUIRED DOCUMENTS ON SITE MAY RESULT IN ICN REQUIRING THE CONTRACTOR TO STOP WORKING UNTIL THE REQUIRED DOCUMENTS ARE
- 15. SUBCONTRACTORS SHALL MEET THE SAME QUALIFICATIONS STATED FOR CONTRACTORS. CONTRACTOR SHALL OBTAIN APPROVAL OF THE CONTRACTING AGENCY'S PROJECT MANAGER PRIOR TO USING A SUBCONTRACTOR
- 16. RESTORE ALL DAMAGE TO PRIVATE PROPERTY, RIGHT-OF-WAY, ICN PROPERTY, AND ANY OTHER PROPERTY DAMAGED IN THE COURSE OF THE WORK.
- 16.1.ANY DISRUPTION OF GRASS IN AN INDIVIDUAL'S YARD OR IN A PRIVATE MAINTAINED AREA OF THE PUBLIC RIGHT OF WAY (THE AREA BETWEEN THE SIDEWALK AND THE STREET CURB) MUST BE RESTORED THROUGH RE-SODDING. ANY DISRUPTION OF THE GRASS IN THE MEDIAN WAY OR AN UNIMPROVED SHOULDER MUST BE RESTORED EITHER THROUGH RE-SODDING OR RE-SEEDING AS REQUIRED BY THE ROW OWNER.
- 16.2.AREAS SHALL BE RESTORED TO ORIGINAL OR BETTER CONDITION.
- 16.3. DIRT SHALL BE MECHANICALLY COMPACTED AROUND HANDHOLES AND PITS.
- 16.4. LAWNS SHALL BE SODDED WITH LIKE GRASS.
- 16.5. CONTRACTOR IS RESPONSIBLE FOR WATERING THE SOD UNTIL IT HAS KNITTED TO THE GROUND BENEATH.
- 16.6.ALL DEBRIS SHALL BE REMOVED FROM THE CONSTRUCTION AREAS INCLUDING BUT NOT LIMITED TO: CONSTRUCTION MATERIALS, TRASH, LARGE OBJECTS OR STONES WITHIN BACKFILLED AREAS, ETC.

### **DUCT INSTALLATION REQUIREMENTS**

- 1. HDPE DUCT SHALL BE NO LESS THAN 36-42 INCHES DEEP.
- 2. DUCT SHALL BE INSTALLED IN THE PUBLIC RIGHT-OF-WAY.
- 3. WHEN CROSSING A HIGHWAY IN DOT RIGHT-OF-WAY, DUCT SHALL BE NO LESS THAN 48 INCHES BELOW GRADE UNDER THE ROADWAY AND SHOULDERS. HDPE MAY BE USED UNDER THE ROADWAY AND SHOULDERS IF INSTALLED AT A MINIMUM DEPTH OF 48".
- 4. SHOULD IT BE NECESSARY TO CROSS PRIVATE PROPERTY, THE CONTRACTOR MAY APPLY TO THE ICN FOR AN EXCEPTION, AND REQUEST PERMISSION TO SECURE AN EASEMENT. THE EASEMENT IS REQUIRED TO BE IN THE NAME OF ICN AND THE CONTRACTOR SHALL HAVE THE EASEMENT PREPARED BY A LAND SURVEYOR LICENSED IN THE STATE OF IOWA. CONTRACTOR SHALL BE RESPONSIBLE FOR ALL FEES UNLESS PREVIOUSLY AUTHORIZED BY THE ICN
- 5. AT THE CONCLUSION OF THE PROJECT, PROVIDE AND LEAVE A PULL ROPE IN ALL DUCTS, CONDUITS AND PATHWAYS, INCLUDING INDOOR, OUTDOOR, NEW AND EXISTING.
- 6. DIRT SHALL BE MECHANICALLY COMPACTED AT ALL DUCT SPLICES, BORE PITS AND AROUND HANDHOLES.
- 7. GROUND SHALL BE RESTORED TO THE CONDITION FOUND PRIOR TO CONSTRUCTION AND DEBRIS REMOVED PRIOR TO SODDING OR SEEDING.
- 8. ALL CONDUITS SHALL BE PLUGGED VIA DUCT SEAL OR OTHER METHOD UPON COMPLETION OF CABLE INSTALLATION
- 9. IF SCHEDULE 40 PVC CONDUIT IS UTILIZED, ALL ANGLES (45, 90 DEGREE OR OTHER) REQUIRE FITTINGS TO LONG SWEEP TO ACCOMMODATE MINIMUM CABLE BEND RADIUSES.
- 10. THE ICN REQUIRES PICTURES BY THE CONTRACTOR AND/OR ON- SITE INSPECTION BY ICN STAFF PRIOR TO COMPLETION OF THE PROJECT WHERE PIPE AND FITTINGS ARE NOT EXPOSED; I.E. UNDERGROUND, BEHIND A WALL, ETC.

### HANDHOLE REQUIREMENTS

- 1. INSTALL HANDHOLES SO THAT THE LID IS LEVEL AND FLUSH WITH THE SURROUNDING NATURAL GRADE. THE LID SHALL NOT EXTEND ABOVE THE SURROUNDING NATURAL GRADE
- 2. PROVIDE 1/2" OPENING HARDWARE CLOTH TYPE SCREEN WIRE BELOW THE HANDHOLE
- 3. PROVIDE 5-6 INCHES OF 3" CRUSHED ROCK BELOW THE HANDHOLE. ROCK SHALL BE COMPACTED. GRAVEL SHALL EXTEND A MINIMUM OF 6 INCHES BEYOND THE OUTSIDE WALLS OF THE HANDHOLE. DO NOT USE PEA GRAVEL OR OTHER ROUND STONE.
- 4. DO NOT PLACE GRAVEL INSIDE HANDHOLE ABOVE THE HARDWARE CLOTH.
- 5. CONDUIT SHALL EXTEND A MINIMUM OF 6" ABOVE THE HARDWARE CLOTH/GRAVEL.
- 6. FAILURE OF THE CONTRACTOR TO INSTALL HANDHOLES AS SPECIFIED WILL CAUSE THE CONTRACTOR TO RETURN AND RE-INSTALL THE HANDHOLE ACCORDING TO THIS SPECIFICATION BEFORE PAYMENT FOR THE PROJECT IS
- 7. HANDHOLE INSTALLATIONS SHALL FOLLOW ICN STANDARD TYPICAL INSTALLATION; SEE TYPICAL DRAWING.

### FIBER INSTALLATION REQUIREMENTS

- 1. INSTALL FIBER ACCORDING TO INDUSTRY "BEST PRACTICES".
- 2. THE CONTRACTOR SHALL NOT VIOLATE THE MANUFACTURER'S MINIMUM INSTALLATION BEND RADIUS WHEN THE CABLE IS UNDER TENSION, OR THE MINIMUM INSTALLED BEND RADIUS.
- 3. TO PREVENT EXCEEDING THE MANUFACTURER'S MAXIMUM PULLING TENSION DURING INSTALLATION OF THE FIBER OPTIC CABLE, THE CONTRACTOR SHALL USE A "BREAK-AWAY" PULLING SWIVEL WHEN INSTALLING CABLE.
- 4. THE "BREAK-AWAY" FUNCTION SHALL ACTIVATE AT OR BELOW THE MAXIMUM PULLING TENSION SPECIFIED BY THE CABLE MANUFACTURER
- 5. THE CONTRACTOR SHALL TEST ALL STRANDS OF THE FIBER, ON THE REEL, PRIOR TO BEGINNING FIBER INSTALLATION. CONFIRM THAT ALL STRANDS MEET MANUFACTURER'S LOSS SPECIFICATIONS.
- 6. THE CONTRACTOR SHALL FIELD VERIFY ALL LENGTHS AND EXISTING CONDITIONS PRIOR TO STARTING
- 7. SLACK LOOPS IN HANDHOLES SHALL BE COILED, INSTALLED, AND SECURED TO AVOID DAMAGE TO THE COIL AND NOT INTERFERE WITH LIDS
- 8. SLACK LOOPS AT SPLICES SHALL BE COILED TO MATCH THE EXISTING FIBER CABLE TAILS AND ALLOWANCE FOR SPLICE PREPARATION.
- 9. ICN FIBER IN ALL HANDHOLES SHALL BE LABELED WITH ICN WRAP AROUND CABLE TAGS OR OTHER LABELED CABLE TAGS.

### BUILDING ENTRY REQUIREMENTS

- WEATHER-SEAL ALL PENETRATIONS.
- 2. USE MORTAR OR SIMILAR CEMENT TO SEAL PENETRATION OF BRICK OR CEMENT BLOCK.
- 3. FIRESTOP PENETRATIONS OF ANY FIRE-RATED FLOOR, WALL OR CEILING
- 4. REPLACE THE FIRESTOP MATERIAL IN ANY EXISTING FIRESTOPPED PENETRATION USED BY THE CONTRACTOR.
- 5. ALL OUTDOOR CONDUITS, OF ANY LENGTH, SHALL BE GALVANIZED IRON PIPE (GIP). EMT, PVC AND PLASTIC ARE
- 6. IMMEDIATELY UPON INSTALLATION, SEAL THE ENDS OF ALL DUCTS WITH DUCT SEAL OR EXPANSION FOAM TO PREVENT SILTATION OR FILLING WITH MOISTURE. THIS APPLIES TO BOTH NEW AND EXISTING DUCTS.
- 7. AT THE CONCLUSION OF THE PROJECT, ENSURE THAT A PULL ROPE IS LEFT IN ALL PATHWAYS, BOTH INSIDE AND OUTSIDE, NEW AND EXISTING

### LOCATE FACILITY REQUIREMENTS

- 1. TRACER WIRE SHALL BE CONTINUOUS
- 2. SPLICES IN THE TRACER WIRE ARE NOT ALLOWED. IF TRACER WIRE IS ACCIDENTALLY SEVERED, REQUEST PERMISSION FROM ICN TO SPLICE.
- 3. SPLICE ONLY IN HANDHOLES.
- 4. USE EITHER AN EPOXY SPLICE KIT, SCOTCH 3M 3832 OR A MOLEX PERMASEAL BUTT SPLICE. 10-12 GA. SPLICE MATERIALS SHALL BE DESIGNED FOR UNDERGROUND APPLICATIONS.
- 5. LEAVE THE WIRE SPLICE VISIBLE IN THE HANDHOLE.
- 6. ROUTE A GROUND WIRE FROM THE GROUND INSIDE THE BUILDING, THROUGH THE ENTRY TO THE TII 163
- 7. SECURE ALL RISER CONDUITS WITH 3 EACH TWO-HOLE CONDUIT STRAPS.
- 8. WIRE THE PEDESTAL/TERMINAL SO THAT LOCATES MAY BE PERFORMED IN ANY DIRECTION AND FROM THE FAR
- 9. DO NOT LEAVE ANY EXPOSED TRACER WIRE OR GROUND WIRE.
- 10. PERMANENTLY GROUND THE TRACER WIRE AT THE HANDHOLE ON THE FURNISHED GROUND ROD.
- 11. AT THE CONCLUSION OF THE PROJECT LEAVE THE TRACER WIRE SHIELD SHORTED TO GROUND IN THE LOCATE TERMINAL
- 12. USE TRACER WIRE THAT IS RATED FOR DIRECT BURIAL WHERE REQUIRED. TRACER WIRE SHALL BE #12 AWG, SOLID HF CCS 30 MIL HDPE HIGH FLEX TRACER WIRE: EITHER SOLID COPPER OR COPPER CLAD STEEL.
- 13. LABEL ALL WIRES IN THE LOCATE TERMINAL/PEDESTAL/TRIVIEW. (I.E. "GROUND", "FACING DMACC", "FACING NORTH" ETC.)
- 14. FAILURE TO LABEL THE LOCATE WIRES WILL CAUSE THE CONTRACTOR TO RETURN AND PROPERLY LABEL THE WIRES BEFORE PAYMENT FOR THE PROJECT IS MADE.
- 15. BOND TRACER WIRE(S) WITHIN SPLICE ENCLOSURES UTILIZING A 3M 4460-D\FO SHIELD BONDING KIT.
- 16. ROUTE TRACER WIRE(S) OUT OF SPLICE ENCLOSURE THROUGH A SINGLE PORT UTILIZING A FOSC CLOSURE
- 17. AT SPLICE LOCATIONS WITH NO LOCATE PEDESTAL, TRACER WIRES SHALL BE BONDED TOGETHER, WITHIN THE
- 18. AT EACH END OF ANY TRACER WIRE, USE APPROPRIATE-SIZED RING TERMINAL (CRIMP) CONNECTORS USING APPROPRIATE CRIMP TOOL; OR CREATE A WIRE EYELET AS PER TYPICAL INSTALLATION OF TRI-VIEW LOCATE PEDESTAL DETAIL.

### DELIVERABLES/ACCEPTANCE:

- 1. CONTRACTOR SHALL PROVIDE CONSTRUCTION REDLINE AS-BUILTS WITH:
- 1.1. OFFSETS TO FIXED OBJECTS TO THE CABLE/CONDUIT RUNNING LINE, HANDHOLES AND NEW FACILITIES.
- 1.2. METER MARKS OF CABLE INSTALLATIONS AT HANDHOLE ENTRY/EXIT, SPLICE LOCATIONS, BUILDING ENTRIES,
- 1.3. DEPTHS OF CABLE AND/OR CONDUIT INSTALLATION.
- 1.4. ONE ORIGINAL SET OF AS-BUILT DRAWINGS MUST BE PROVIDED WITHIN TWO (2) WEEKS AFTER COMPLETION OF CONSTRUCTION FOR THE ICN MANAGEMENT RECORDS. REDLINE AS-BUILT DRAWINGS MUST BE COMPLETE.
- 2. CONTRACTOR SHALL PROVIDE SPLICING REDLINE OF ALL SPLICING COMPLETED AND VALIDATION THAT THE SPLICE PLAN WAS FOLLOWED.
- 3. CONTRACTOR IS RESPONSIBLE TO LOCATE FIBER UNTIL ACCEPTANCE BY THE ICN. ACCEPTANCE INCLUDES:
- 3.1. SUBMISSION OF CONSTRUCTION AND SPLICING RED LINE DRAWINGS BY CONTRACTOR.
- 3.2. ASSIGNMENT OF LINK NUMBER BY THE ICN (IF APPLICABLE).
- 3.3. SUBMISSION OF FINAL AS BUILT DRAWING BY THE ICN TO THE ICN NETWORK MAINTENANCE PROVIDER.
- 3.4. SUBMISSION TO IOWA ONE CALL AND THE ICN NETWORK MAINTENANCE PROVIDER'S CONTRACT LOCATER.
- 3.5. THE MEASUREMENTS IN THE STATEMENT OF WORK ARE ESTIMATES AND NEED TO BE VERIFIED BY THE
- 4. ONLY WRITTEN MODIFICATIONS TO THIS SCOPE OF WORK ARE BINDING VERBAL CHANGES TO THIS SCOPE OF WORK BY ANY PERSON OR PERSONS ARE NOT BINDING, UNLESS CONFIRMED IN WRITING
- 5. FINAL PAYMENT WILL NOT BE PROCESSED UNTIL ALL DELIVERABLES ARE RECEIVED AND ACCEPTED



DELAWARE COUNTY SHERIFF'S OFFICE FIBER INSTALLATION

IOWA COMMUNICATIONS NETWORK
400 EAST 14TH STREET

PAGE 3 OF 37

FOR PERMIT REVIEW 07/06/2023 GRIMES STATE OFFICE BUILDING 3 FOR FINAL PERMIT REVIEW 07/12/2023 DES MOINES, IOWA 50319 ICN © 2021, COPY WITH PERMISSION

FILE: H:\Project\230437\dwg\23-0424 TITLE.dwg OSP PROJECT LOG #: 28210105 LINK NAME: 0122 SCALE: NONE SIZE: 11" X 17" ICN GENERAL NOTES

ICN PROVIDED MATERIALS				
CATEGORY	ITEM DESCRIPTION	UNIT	QTY	
FIBER CABLE	36F ARMORED SM CABLE	LFT	11900	
FIBER CABLE	12F DIELECTRIC SM CABLE	LFT	900	
LOCATE FACILITIES	TRIVIEW TEST STATION	EA	3	
LOCATE FACILITIES	ICN SNAP AROUND	EA	12	
LOCATE FACILITIES	TRIVIEW WARNING MARKER 78IN	EA	8	
FDP, BULHEADS, TRAYS	CORNING CCH-01U RAC MOUNT FDP	EA	1	
FDP, BULHEADS, TRAYS	CORNING CCH-02U RAC MOUNT FDP	EA	1	
FDP, BULHEADS, TRAYS	CORNING CCH 12F SM D-SC CASSETTE LOADED	EA	2	
FDP, BULHEADS, TRAYS	CORNING CCH 6F SM SC CASSETTE LOADED	EA	1	
SPLICE CLOSURE	*450A SPLICE CLOSURE (W/LUGS)	EA	2	
SHIELD BOND CONNECTOR	*SHIELD BOND CONNECTOR	EA	6	

VENDOR PROVIDED MATERIALS				
CATEGORY	ITEM DESCRIPTION	UNIT	QTY	
DUCT	2" ORANGE HDPE DUCT SDR 11 OR 9	LFT	800	
DUCT	2" ORANGE HDPE DUCT	LFT	10025	
LOCATE FACILITIES	12 AWG HDPE ORANGE SOLID COPPER WIRE	LFT	1200	
LOCATE FACILITIES	6 AWG BARE SOLID COPPER GROUND WIRE	LFT	80	
HANDHOLES	24X36X36 TIER 15 HH W/LID	EA	8	
HANDHOLES	30X48X36 TIER 15 HH W/LID	EA	1	
LOCATE FACILITIES	½" X 6' GROUND ROD	EA	3	
LOCATE FACILITIES	½" GROUND ROD CLAMP	EA	3	

FINER CABLES, TRACER WIRE, PULL ROPE, ETC. CONTRACTOR SHALL VERIFY NECESSARY QUANTITIES INCLUDING COILS.

NOTE ON HDPE CONDUIT AND SPLICES:

CABLE THROUGH DUCT.

1. HDPE SHALL BE ORANGE SMOOTH WALL SDR 13.5

2. DUCT SPLICES SHALL BE MADE OF THE FOLLOWING (IN ORDER OF PREFERENCE.) -CRIMP ON

-CLAMP ON / BOLT ON (SPLIT COUPLINGS) -PUSH ON

3. ALL SPLICES SHALL BE AIR AND WATER TIGHT

4. DUCT SPLICES SHALL BE OF A TYPE MADE SPECIFICALLY FOR JOINING HDPE CONDUIT 5. ALL DUCT SPLICES SHALL BE MADE IN SUCH MANNER AS TO ALLOW CONTINUOUS PULLING OF

\*\*ANY EXCEPTIONS MUST BE AGREED UPON IN WRITING PRIOR TO CONSTRUCTION\*\*

	ESTIMATE OF QUANTITIES						
ITEM NO.	ITEM	UNIT	PLANNED TOTAL	AS-BUILT TOTAL			
1	HORIZONTAL BORING - RESIDENTIAL 1 EA 2" CONDUIT	LF	10100				
2	HANDHOLE PLACEMENT - RESIDENTIAL STD 24X36X36	EA	8				
3	HANDHOLE PLACEMENT - RESIDENTIAL LG 48X30X36	EA	1				
4	FIBER INSTALLATION - EXISTING DUCT RESIDENTIAL	LF	675				
5	FIBER INSTALLATION - NEW DUCT RESIDENTIAL	LF	10750				
8	RIVER BORING - RESIDENTIAL 1 EA 2" CONDUIT	LF	800				
9	PLACE WARNING MARKER-URBAN	EA	8				
10	PLACE LOCATE PEDESTAL-RESIDENTIAL	EA	3				
11	MOBILIZATION	LS	1				
12	MATERIAL PICK UP	EA	1				

	ESTIMATE OF QUANTITIES FOR ALTERNATE ROUTE INTO SHERIFF STATION					
ITEM NO.	ITEM	UNIT	PLANNED TOTAL	AS-BUILT TOTAL		
1	HORIZONTAL BORING - RESIDENTIAL 1 EA 2" CONDUIT	LF	200			
2	HANDHOLE PLACEMENT - RESIDENTIAL STD 24X36X36	EA	1			
3	FIBER INSTALLATION - NEW DUCT RESIDENTIAL	LF	200			
4	PLACE WARNING MARKER-URBAN	EA	1			

NOTE: THESE TABLES SHOW APPROXIMATE LENGTHS IN CONDUIT ONLY AND DO NOT INCLUDE ANY COILS OR SLACK FOR

CONDUIT RUN

2

3

4

5

6

8

9

10

11

12\*

FROM

WDHS DATA ROOM

EX - HH 1

HH 2

HH 3

HH 4

HH 5

HH 6

HH7

HH 8

HH 9

HH 10

EX - HH11

*LISTING OF CONDUIT & FIBER WORK FOR ALTERNATE ROUTE INTO SHERIFF STATION						
CONDUIT RUN	FROM	ТО	LENGTH	2" CONDUIT	12F SM DIELECTRIC FIBER, UNDERGROUND	
12A	EX - HH11	HH12	195	195	195	
12B	HH12	DCS DATA ROOM	167	0	167	
TOTAL 195 362				362		

LISTING OF CONDUIT & FIBER WORK

LENGTH

256

642

1201

1098

1168

1289

742

666

2105

1096

318

376

CONDUIT

0

642

1201

1098

1168

1289

742

666

2105

1096

318

0

10325

TO

EX - HH 1

HH 2

HH 4

HH 5

HH 6

HH7

HH 8

HH 9

HH 10

EX - HH11

DCS DATA ROOM

TOTAL

36F SM ARMORED

UNDERGROUND

642

1201

1098

1168

1289

742

666

2105

1096

0

10263

FIBER.

12F SM DIELECTRIC FIBER,

UNDERGROUND

0

0

0

0

0

0

0

0

0

318

376

694

·					
LISTING OF HANDHOLE WORK					
HANDHOLE LABEL	HANDHOLE TYPE	ROUTE	STATION	36 F/A SM ARMORED FIBER COIL	12 F SM DIELECTRIC FIBER COIL
EX - HH 1	24" X 36" X 36'	WEST DELAWARE HIGH SCHOOL MIDSHEATH CASE	0+00	150	0
HH2	24" X 36" X 36"	E. UNION ST.	6+42	100	0
НН3	24" X 36" X 36"	W. UNION ST.	18+43	100	0
HH4	24" X 36" X 36"	W. UNION ST.	29+41	100	0
HH5	24" X 36" X 36"	N. RIVER ST.	41+09	100	0
HH6	30" X 48" X 36"	W. MAIN ST.	53+98	150	0
HH7	24" X 36" X 36"	W. MAIN ST.	61+40	150	0
HH8	24" X 36" X 36"	W. MAIN ST.	68+06	150	0
НН9	24" X 36" X 36"	N. 13TH ST.	89+11	100	0
HH10	24" X 36" X 36"	N. 13TH ST.	100+07	75	75
EX HH11**	24" X 36" X 36'	MANCHESTER SHERIFF OFFICE	103+25	0	25
	TO	TAL	_	1175	100

**LISTING OF HANDHOLE WORK FOR ALTERNATE ROUTE INTO SHERIFF					ATION	
	HANDHOLE LABEL	HANDHOLE TYPE	ROUTE	STATION	12 F SM DIELECTRIC FIBER COIL	
	EX HH11	24" X 36" X 36"	HH12	0+00A	100	
	HH12	24" X 36" X 36'	MANCHESTER SHERIFF OFFICE	1+95A	50	
	TOTAL					

1-800-292-8989

DELAWARE	COUNTY	SHERIFF'S	OFFICE
FIRER INST	ALLATION		

hbk (ich

טוו	LIC INSTALLATION	
1	60% REVIEW	05/19/2023
2	FOR PERMIT REVIEW	07/06/2023
3	FOR FINAL PERMIT REVIEW	07/12/2023
4		

SIZE: 11" X 17" MATERIALS

SCALE: NONE

IOWA COMMUNICATIONS NETWORK

400 EAST 14TH STREET
GRIMES STATE OFFICE BUILDING DES MOINES, IOWA 50319
ICN © 2021, COPY WITH PERMISSION PAGE 4 OF 37

NOTE: CONDUIT INSTALLATION METHOD SHALL BE BORED UNDER ANY ROADWAYS, DRIVEWAYS, AND PAVED SURFACES. THE METHOD BETWEEN PLOW
VERSUS BORE FOR CONDUIT INSTALLATION IS AT THE CONTRACTORS DISCRETION

FILE: H:\Project\230437\dwg\23-0424 TITLE.dwg OSP PROJECT LOG #: 28210105 LINK NAME: 0122







PULL NEW LINK 0122 36 F/A SM THROUGH PLUGGED HDPE CONDUIT LEADING TO EXISTING HH EX-HH1

PULL NEW LINK 0122 36 F/A SM THROUGH EXISTING HDPE CONDUIT LEADING TO WDHS DATA ROOM. APPROXIMATELY 206' FROM EX-HH1 TO DATA ROOM


### **GROUND BAR LOCATION**

#6 GROUND WIRE FROM END OF ARMORED CABLE TO NEAREST **GROUND POINT.** 





DATA ROOM: TRANSITION CABLE FROM EXISTING HDPE CONDUIT TO DATA RACK CABINET. PULL CABLE TRHOUGH EXISTING HDPE CONDUIT AND ROUTE WITH EXISTING CABLE TO CABLE TRAY AND RACK LOCATION. LEAVE 25' COIL FOR SPLICER. 1ST RACK FROM THE NORTH





		DELAWARE COUNTY SHERIFF'S OFFICE FIBER INSTALLATION				
ı	1 60% REVIEW 05/19/2023					
Н	2	FOR PERMIT REVIEW	07/06/2023	"		

hbk (icn

OWA COMMUNICATIONS NETWORK

400 EAST 14TH STREET
GRIMES STATE OFFICE BUILDING
DES MOINES, 10WA 50319
ICN © 2021, COPY WITH PERMISSION FOR FINAL PERMIT REVIEW 07/12/2023

OSP PROJECT LOG #: 28210105 LINK NAME: 0122

SIZE: 11" X 17" PLAN SHEET 6 SCALE: 1:50


PAGE 6 OF 37



- ICN STA. 0+00 EXISTING ICN HANDHOLE EX HH1 AND EXISTING TRIVIEW WARNING MARKER. NEW LINK 0122 - 36 F/A SM - 150' COIL. REPLACE TRIVIEW WARNING MARKER WITH TRIVIEW LOCATE PEDESTAL ALONG WITH GROUND ROD AND #6 GROUND WIRE. 2 #12 TRACER WIRE 50' COILS FOR SPLICER
- 2) PULL NEW LINK-0122 36 F/A SM THROUGH NEW 1-2" HDPE CONDUIT. 42" MINIMUM BELOW GRADE.
- 3 OTHER UTILITY PROVIDERS IN AREA. STAY 36" CLEAR FROM ALL EXISTING UTILITIES.
- WATER AND GAS MAIN RUNS PARALLEL TO N NEW ST. IN NORTH ROW. USE CAUTION WHEN BORING IN THIS AREA
- PULL NEW LINK 0122 36 F/A SM THROUGH PLUGGED HDPE CONDUIT LEADING TO WDHS DATA ROOM

MATCH LINE SEE SHEET 8





LOOKING WEST



**EX HH1 - ICN STA. 0+00** 



ICN STA. 3+10



LOOKING SOUTH

ICN STA. 3+45

LISTING OF HANDHOLES LENGTH FT HANDHOLE STATION HANDHOLE STATION DATA ROOM EX HH1 EX HH1 0+00 HH2 6+42 642 TOTAL 642

\* LENGTH DOES NOT INCLUDE SLACKCOILS

07/12/2023

**GRAPHIC SCALE** 

1-800-292-8989

DELAWARE COUNTY SHERIFF'S OFFICE FIBER INSTALLATION 60% REVIEW 05/19/2023 FOR PERMIT REVIEW 07/06/2023

FOR FINAL PERMIT REVIEW

SCALE: 1:50

IOWA COMMUNICATIONS NETWORK

400 EAST 14TH STREET
GRIMES STATE OFFICE BUILDING

NOTE: RUNNING LINE TO BE ADJUSTED PER UTILITY LOCATES. CONTACT THE ICN AND MANCHESTER PUBLIC WORKS TO ADJUST RUNNING LINE.

FILE: H:\Project\230437\dwg\23-0424 DESIGN.dwg

OSP PROJECT LOG #: 28210105

LINK NAME: 0122

SIZE: 11" X 17" PLAN SHEET 7

DES MOINES, IOWA 50319
ICN © 2021, COPY WITH PERMISSION PAGE 7 OF 37

## MATCH LINE SEE SHEET 7



- 1) PULL NEW LINK-0122 36 F/A SM THROUGH NEW 1-2" HDPE CONDUIT. 42" MINIMUM BELOW GRADE.
- ICN STA. 6+42 INSTALL PROPOSED 24"x36"x36" ICN HANDHOLE - HH2. 100' SLACK COIL 36 F/A SM.
- (3) PULL NEW LINK-0122 36 F/A SM THROUGH NEW 1-2" HDPE CONDUIT. 42" MINIMUM BELOW GRADE.
- OTHER UTILITY PROVIDERS IN AREA. STAY 36" CLEAR FROM ALL EXISTING UTILITIES.

LOOKING NORTH



LOOKING EAST



LOOKING WEST



ICN STA. 7+00

ICN STA. 7+00

LISTING OF HANDHOLES STATION HANDHOLE STATION LENGTH FT HANDHOLE HH1 0+00 HH2 6+42 642 6+42 HH3 HH2 18+43 1201

**GRAPHIC SCALE** 

\* LENGTH DOES NOT INCLUDE SLACKCOILS

TOTAL

1-800-292-8989

DELAWARE		OFFICE
FIBER INST	ALLATION	

LID	FIBER INSTALLATION				
1	60% REVIEW	05/19/2023			
2	FOR PERMIT REVIEW	07/06/2023			
3	FOR FINAL PERMIT REVIEW	07/12/2023			
4					

IOWA COMMUNICATIONS NETWORK

400 EAST 14TH STREET
GRIMES STATE OFFICE BUILDING
DES MOINES, IOWA 50319
ICN © 2021, COPY WITH PERMISSION

NOTE: RUNNING LINE TO BE ADJUSTED PER UTILITY LOCATES. CONTACT THE ICN AND MANCHESTER PUBLIC WORKS TO ADJUST RUNNING LINE.


FILE: H:\Project\230437\dwg\23-0424 DESIGN.dwg

OSP PROJECT LOG #: 28210105 LINK NAME: 0122

SIZE: 11" X 17" PLAN SHEET 8 SCALE: 1:50

PAGE 8 OF 37

1843

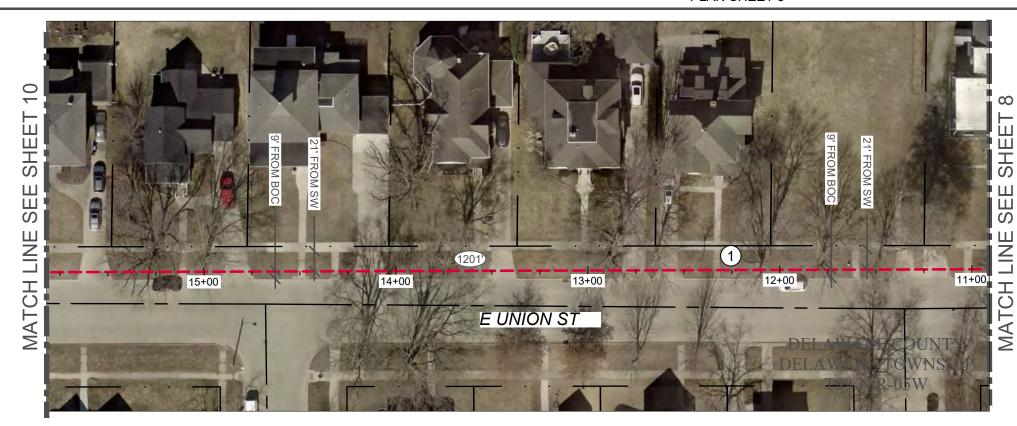

- (1) PULL NEW LINK-0122 36 F/A SM THROUGH NEW 1-2" HDPE CONDUIT. 42" MINIMUM BELOW GRADE.
- (2) OTHER UTILITY PROVIDERS IN AREA. STAY 36" CLEAR FROM ALL EXISTING UTILITIES.
- (3) WATER AND GAS MAINS RUN PARALLEL TO E. UNION ST. IN NORTH ROW. USE CAUTION WHEN BORING IN THIS AREA






ICN STA. 11+00

LISTING OF HANDHOLES				
HANDHOLE	LENGTH FT			
HH2	6+42	HH3	18+43	1201
	1201			

hbk (icn)

PAGE 9 OF 37



\* LENGTH DOES NOT INCLUDE SLACKCOILS

**GRAPHIC SCALE** 

OSP PROJECT LOG #: 28210105 LINK NAME: 0122

<b>MOI</b>	
ONE C	àЦ
1-800-292-8989	811

ı	DE	LAWARE COUNTY SHE	:RIFF'S OFF	ICE
l	FIB	ER INSTALLATION		
ı	1	05/19/2023	10	
	_	FOR REDMIT REVIEW	07/06/2022	_

SCALE: 1:50

IOWA COMMUNICATIONS NETWORK

400 EAST 14TH STREET
GRIMES STATE OFFICE BUILDING
DES MOINES, IOWA 50319
ICN © 2021, COPY WITH PERMISSION 3 07/12/2023

SIZE: 11" X 17" PLAN SHEET 9

NOTE: RUNNING LINE TO BE ADJUSTED PER UTILITY LOCATES. CONTACT THE ICN AND MANCHESTER PUBLIC WORKS TO ADJUST RUNNING LINE.

FILE: H:\Project\230437\dwg\23-0424 DESIGN.dwg



- 1) PULL NEW LINK-0122 36 F/A SM THROUGH NEW 1-2" HDPE CONDUIT. 42" MINIMUM BELOW GRADE.
- ICN STA. 18+43 INSTALL PROPOSED 24"x36"x36" ICN HANDHOLE - HH3. 100' SLACK COIL 36 F/A SM.
- (3) PULL NEW LINK 0122 36 F/A SM THROUGH NEW 1-2" HDPE CONDUIT. 42" MINIMUM BELOW GRADE.
- OTHER UTILITY PROVIDERS IN AREA. STAY 36" CLEAR FROM ALL EXISTING UTILITIES.
- (5) WATER AND GAS MAINS RUN PARALLEL TO E. UNION ST. IN NORTH ROW. USE CAUTION WHEN BORING IN THIS AREA

LOOKING WEST



ICN STA. 17+00

LOOKING WEST



HH3 - ICN STA. 18+43



HH3 - ICN STA. 18+43

**GRAPHIC SCALE** 

LISTING OF HANDHOLES				
HANDHOLE	STATION	HANDHOLE	STATION	LENGTH FT
HH2	6+42	HH3	18+43	1201
HH3	18+43	HH4	29+41	1098
TOTAL				2299

\* LENGTH DOES NOT INCLUDE SLACKCOILS

1-800-292-8989

DELAWARE		OFFIC
FIBER INST	ALLATION	

FIBER INSTALLATION				
1	60% REVIEW	05/19/2023		
2	FOR PERMIT REVIEW	07/06/2023		
3	FOR FINAL PERMIT REVIEW	07/12/2023		
4				

IOWA COMMUNICATIONS NETWORK

400 EAST 14TH STREET
GRIMES STATE OFFICE BUILDING
DES MOINES, IOWA 50319
ICN © 2021, COPY WITH PERMISSION

NOTE: RUNNING LINE TO BE ADJUSTED PER UTILITY LOCATES. CONTACT THE ICN AND MANCHESTER PUBLIC WORKS TO ADJUST RUNNING LINE.

FILE: H:\Project\230437\dwg\23-0424 DESIGN.dwg

OSP PROJECT LOG #: 28210105 LINK NAME: 0122

SIZE: 11" X 17" PLAN SHEET 10 SCALE: 1:50

PAGE 10 OF 37



- 1) PULL NEW LINK-0122 36 F/A SM THROUGH NEW 1-2" HDPE CONDUIT. 42" MINIMUM BELOW GRADE.
- (2) OTHER UTILITY PROVIDERS IN AREA. STAY 36" CLEAR FROM ALL EXISTING UTILITIES.
- (3) WATER AND GAS MAINS RUN PARALLEL TO E. UNION ST. IN NORTH ROW. USE CAUTION WHEN BORING IN THIS AREA
- SHALLOW WATER SERVICE LOCATED AROUND STATION 21+00 HEADING NORTH INTO PARK. CONTRACTOR TO USE CAUTION WHEN BORING IN THIS AREA

LOOKING WEST



ICN STA. 23+50

LISTING OF HANDHOLES HANDHOLE STATION HANDHOLE STATION LENGTH FT 18+43 HH4 HH3 29+41 1098 TOTAL 1098

**GRAPHIC SCALE** 

\* LENGTH DOES NOT INCLUDE SLACKCOILS

SIZE: 11" X 17" PLAN SHEET 11

(S) IOWA 1-800-292-8989 Www.iowaonecall.cam

DELAWARE	COUNTY	SHERIFF'S	OFFICE
FIBER INST	ALLATION		

טו ו	TIDEN INSTALLATION				
1	60% REVIEW	05/19/2023			
2	FOR PERMIT REVIEW	07/06/2023			
3	FOR FINAL PERMIT REVIEW	07/12/2023			
4					

SCALE: 1:50


IOWA COMMUNICATIONS NETWORK

400 EAST 14TH STREET
GRIMES STATE OFFICE BUILDING
DES MOINES, IOWA 50319
ICN © 2021, COPY WITH PERMISSION

PAGE 11 OF 37

NOTE: RUNNING LINE TO BE ADJUSTED PER UTILITY LOCATES. CONTACT THE ICN AND MANCHESTER PUBLIC WORKS TO ADJUST RUNNING LINE.

FILE: H:\Project\230437\dwg\23-0424 DESIGN.dwg OSP PROJECT LOG #: 28210105 LINK NAME: 0122

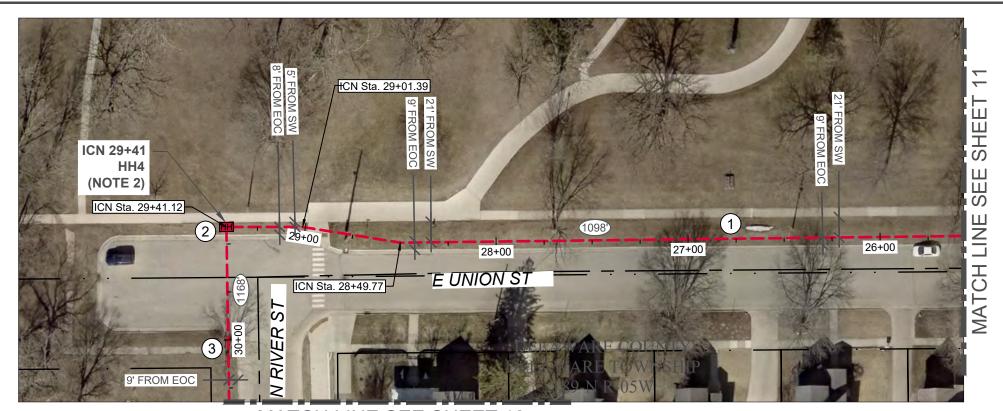

MATCH LINE SEE SHEET 13

- 1) PULL NEW LINK-0122 36 F/A SM THROUGH NEW 1-2" HDPE CONDUIT. 42" MINIMUM BELOW GRADE.
- ICN STA. 29+41 INSTALL PROPOSED 24"x36"x36" ICN HANDHOLE - HH4. 100' SLACK COIL 36 F/A SM.
- (3) PULL NEW LINK 0122 36 F/A SM THROUGH NEW 1-2" HDPE CONDUIT. 42" MINIMUM BELOW GRADE.
- OTHER UTILITY PROVIDERS IN AREA. STAY 36" CLEAR FROM ALL EXISTING UTILITIES.
- (5) WATER AND GAS MAINS RUN PARALLEL TO E. UNION ST. IN NORTH ROW. USE CAUTION WHEN BORING IN THIS AREA

LOOKING EAST



LOOKING WEST



HH5 - IN STA. 29+41





ICN STA. 28+75

**GRAPHIC SCALE** 

LISTING OF HANDHOLES				
HANDHOLE	LENGTH FT			
HH3	18+43	HH4	29+41	1098
HH4	29+41	HH5	41+09	1168
TOTAL				2266

### \* LENGTH DOES NOT INCLUDE SLACKCOILS



DEI	_AWARE	COUNTY	SHE	:RIFF'S	OFFI	CE
FIB	ER INST	TALLATION				
1		00/ DEV/IEW		05/10/	2022	г.

AWARE COUNTY SHE ER INSTALLATION	RIFF'S OFFI	hbk (ich
60% REVIEW	05/19/2023	IOWA COMMUNICATIONS NETWORK
FOR PERMIT REVIEW	07/06/2023	400 EAST 14TH STREET
FOR FINAL PERMIT REVIEW	07/12/2023	GRIMES STATE OFFICE BUILDING DES MOINES, IOWA 50319
		ICN © 2021, COPY WITH PERMISSION

PER UTILITY LOCATES. CONTACT THE ICN AND MANCHESTER PUBLIC WORKS

FILE: H:\Project\230437\dwg\23-0424 DESIGN.dwg

NOTE: RUNNING LINE TO BE ADJUSTED


TO ADJUST RUNNING LINE.

OSP PROJECT LOG #: 28210105 LINK NAME: 0122

PAGE 12 OF 37 SCALE: 1:50 SIZE: 11" X 17" PLAN SHEET 12



- 1 PULL NEW LINK-0122 36 F/A SM THROUGH NEW 1-2" HDPE CONDUIT. 42" MINIMUM BELOW GRADE.
- OTHER UTILITY PROVIDERS IN AREA. STAY 36" CLEAR FROM ALL EXISTING UTILITIES.



LISTING OF HANDHOLES					
HANDHOLE STATION HANDHOLE STATION LENGTH FT					
HH4	29+41	HH4	41+09	1168	
TOTAL				1168	

**⊗IOWA**ONE CALL 1-800-292-8989 www.iowaonecall.cam

DELAWARE	COUNTY	SHERIFF'S	OFFICE
FIBER INST	<b>FALLATION</b>		

טו יו	LIV INSTALLATION	
1	60% REVIEW	05/19/2023
2	FOR PERMIT REVIEW	07/06/2023
3	FOR FINAL PERMIT REVIEW	07/12/2023
4		

IOWA COMMUNICATIONS NETWORK

400 EAST 14TH STREET
GRIMES STATE OFFICE BUILDING
DES MOINES, 10WA 50319
ICN © 2021, COPY WITH PERMISSION

NOTE: RUNNING LINE TO BE ADJUSTED PER UTILITY LOCATES. CONTACT THE ICN AND MANCHESTER PUBLIC WORKS TO ADJUST RUNNING LINE.

FILE: H:\Project\230437\dwg\23-0424 DESIGN.dwg


OSP PROJECT LOG #: 28210105 LINK NAME: 0122

hbk (icn)

SIZE: 11" X 17" PLAN SHEET 13 PAGE 13 OF 37 SCALE: 1:50



- 1 PULL NEW LINK-0122 36 F/A SM THROUGH NEW 1-2" HDPE CONDUIT. 42" MINIMUM BELOW GRADE.
- OTHER UTILITY PROVIDERS IN AREA. STAY 36" CLEAR FROM ALL EXISTING UTILITIES.



LISTING OF HANDHOLES				
HANDHOLE STATION HANDHOLE STATION LENGTH F				
HH4	HH4 29+41 HH5 41+09			
TOTAL				1168

**WOI** 1-800-292-8989 www.iowaonecall.cam

DELAWARE COUNTY SHERIFF'S OFFICE FIBER INSTALLATION

60% REVIEW 05/19/2023 FOR PERMIT REVIEW 07/06/2023 3 FOR FINAL PERMIT REVIEW 07/12/2023

IOWA COMMUNICATIONS NETWORK
400 EAST 14TH STREET
GRIMES STATE OFFICE BUILDING
DES MOINES, IOWA 50319
ICN © 2021, COPY WITH PERMISSION

hbk (icn

PER UTILITY LOCATES. CONTACT THE ICN AND MANCHESTER PUBLIC WORKS TO ADJUST RUNNING LINE.


NOTE: RUNNING LINE TO BE ADJUSTED

FILE: H:\Project\230437\dwg\23-0424 DESIGN.dwg

OSP PROJECT LOG #: 28210105 LINK NAME: 0122

SCALE: 1:50

PAGE 14 OF 37 SIZE: 11" X 17" PLAN SHEET 14

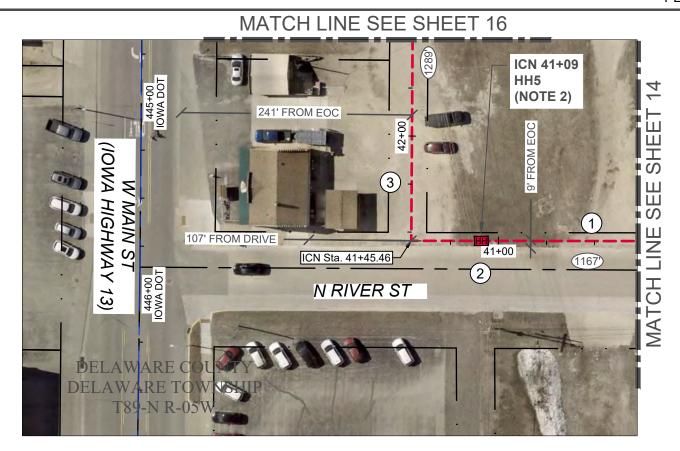

- (1) PULL NEW LINK-0122 36 F/A SM THROUGH NEW 1-2" HDPE CONDUIT. 42" MINIMUM BELOW GRADE.
- (2) ICN STA. 41+09 INSTALL PROPOSED 24"x36"x36" ICN HANDHOLE - HH5. 100' SLACK COIL 36 F/A SM.
- (3) PULL NEW LINK-0122 36 F/A SM THROUGH NEW 1-2" HDPE CONDUIT. 42" MINIMUM BELOW GRADE.
- OTHER UTILITY PROVIDERS IN AREA. STAY 36" CLEAR FROM ALL EXISTING UTILITIES.

### LOOKING NORTH




LOOKING WEST



ICN STA. 41+46

HH6 - ICN STA. 41+09

NOTE: RUNNING LINE TO BE ADJUSTED PER UTILITY LOCATES. CONTACT THE ICN AND MANCHESTER PUBLIC WORKS TO ADJUST RUNNING LINE.



**GRAPHIC SCALE** 

### \* LENGTH DOES NOT INCLUDE SLACKCOILS




DELAWARE		OFFICE
FIBER INST	ALLATION	

טו ו	LIV INSTALLATION		
1	60% REVIEW	05/19/2023	1
2	FOR PERMIT REVIEW	07/06/2023	
3	FOR FINAL PERMIT REVIEW	07/12/2023	
4			

IOWA COMMUNICATIONS NETWORK

400 EAST 14TH STREET
GRIMES STATE OFFICE BUILDING
DES MOINES, IOWA 50319
ICN © 2021, COPY WITH PERMISSION

SIZE: 11" X 17" PLAN SHEET 15 PAGE 15 OF 37 FILE: H:\Project\230437\dwg\23-0424 DESIGN.dwg OSP PROJECT LOG #: 28210105 LINK NAME: 0122 SCALE: 1:50

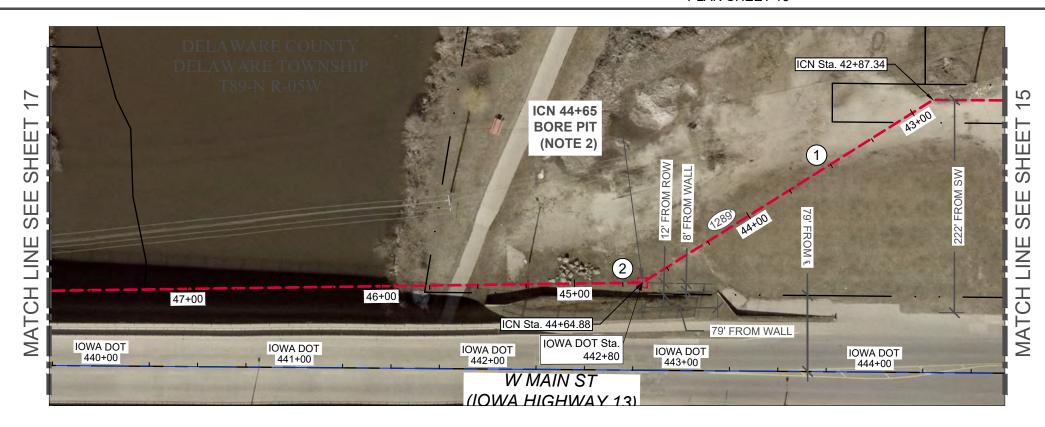

- 1) PULL NEW LINK-0122 36 F/A SM THROUGH NEW 1-2" HDPE CONDUIT. 42" MINIMUM BELOW GRADE.
- BEGIN/END RIVER BORE AT BORE PIT. PULL NEW LINK-0122 - 36 F/A SM THROUGH NEW 1-2" SDR-11 CONDUIT. MAINTAIN AT LEAST 10' BELOW RIVER BED. SEE SHEET 18 FOR DETAILS
- 3 OTHER UTILITY PROVIDERS IN AREA. STAY 36" CLEAR FROM ALL EXISTING UTILITIES.
- 4) INSTALLATION PROPOSED BETWEEN HH5 AND MAQUOKETA RIVER IS IN CITY OF MANCHESTER OWNED PROPERTY





LOOKING WEST





ICN STA. 45+50





ICN STA. 45+50

				1
0 	50 	100 	200	Ν
				- 1
	GRA	PHIC SCALE		

LISTING OF HANDHOLES				
HANDHOLE STATION HANDHOLE STATION LET				LENGTH FT
HH5	41+09	HH6	53+98	1289
TOTAL				1289

\* LENGTH DOES NOT INCLUDE SLACKCOILS

1-800-292-8989

DELAWARE	COUNTY	SHERIFF'S	OFFIC
FIBER INST	ALLATION		

٦	SCALE: 1:50 SIZE: 11" X 17"		PLAN SHEET 16				
	4				ICN © 2021,		
	3	FOR FINAL P	ERMIT REVIEW	07/12/2023	GRIMES S DES M		
	2	FOR PERI	MIT REVIEW	07/06/2023	400 E		
	1	60% F	REVIEW	05/19/2023	IOWA COMM		
	FIBER INSTALLATION						

NOTE: RUNNING LINE TO BE ADJUSTED PER UTILITY LOCATES. CONTACT THE ICN AND MANCHESTER PUBLIC WORKS TO ADJUST RUNNING LINE.

MUNICATIONS NETWORK
0 EAST 14TH STREET
S STATE OFFICE BUILDING
S MOINES, IOWA 50319
1, COPY WITH PERMISSION

PAGE 16 OF 37 SIZE: 11" X 17" PLAN SHEET 16

FILE: H:\Project\230437\dwg\23-0424 DESIGN.dwg

OSP PROJECT LOG #: 28210105 LINK NAME: 0122



- 1) PULL NEW LINK-0122 36 F/A SM THROUGH NEW 1-2" HDPE CONDUIT. 42" MINIMUM BELOW GRADE.
- 2) BEGIN/END RIVER BORE AT BORE PIT. PULL NEW LINK-0122 - 36 F/A SM THROUGH NEW 1-2" SDR-11 CONDUIT. MAINTAIN AT LEAST 10' BELOW RIVER BED. SEE SHEET 18 FOR DETAILS
- (3) OTHER UTILITY PROVIDERS IN AREA. STAY 36" CLEAR FROM ALL EXISTING UTILITIES.





LOOKING EAST



ICN STA. 50+00 ICN STA. 52+60 **GRAPHIC SCALE** 

LISTING OF HANDHOLES				
HANDHOLE STATION HANDHOLE STATION LENGTH FT				
HH5	HH5 41+09 HH6 53+98			
TOTAL				1289

\* LENGTH DOES NOT INCLUDE SLACKCOILS

1-800-292-8989 Www.iowaonecall.cam

DELAWARE	COUNTY	SHERIFF'S	OFFICE
FIBER INST	ALLATION		

٦	SCALE: 1:50		SIZE: 11" X 17"	PLAN SHEET 17
	4			
	3	FOR FINAL P	07/12/2023	
	2	FOR PERI	07/06/2023	
	1	60% F	05/19/2023	
	LID			

IOWA COMMUNICATIONS NETWORK

400 EAST 14TH STREET
GRIMES STATE OFFICE BUILDING
DES MOINES, IOWA 50319
ICN © 2021, COPY WITH PERMISSION

NOTE: RUNNING LINE TO BE ADJUSTED PER UTILITY LOCATES. CONTACT THE ICN AND MANCHESTER PUBLIC WORKS TO ADJUST RUNNING LINE.


FILE: H:\Project\230437\dwg\23-0424 DESIGN.dwg

OSP PROJECT LOG #: 28210105 LINK NAME: 0122

SIZE: 11" X 17" PLAN SHEET 17

PAGE 17 OF 37

hbk (icn

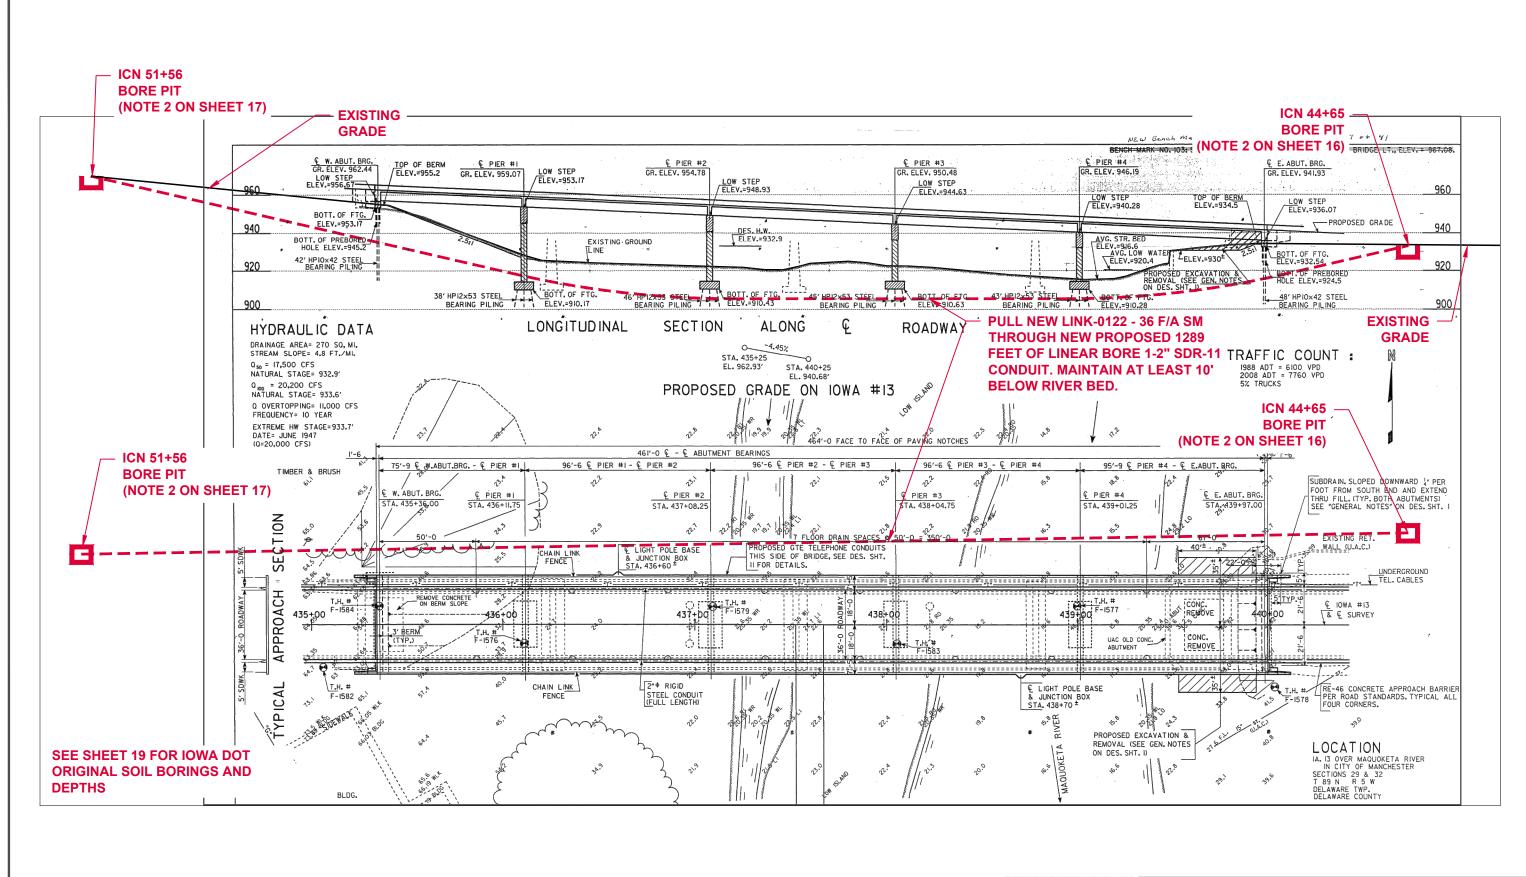


NOTE: RUNNING LINE TO BE ADJUSTED PER UTILITY LOCATES. CONTACT THE ICN AND MANCHESTER PUBLIC WORKS TO ADJUST RUNNING LINE.

FILE: H:\Project\230437\dwg\23-0424 DESIGN.dwg



OSP PROJECT LOG #: 28210105 LINK NAME: 0122

	LAWARE C ER INSTAL		RIFF'S OFFI		hbk	ICN	
1	60% I	REVIEW	IOWA COMMUNICATI	ONS NE	TWORK		
2	FOR PER	MIT REVIEW	07/06/2023	400 EAST 14TH STREET			
3	FOR FINAL P	ERMIT REVIEW	07/12/2023	GRIMES STATE OFFIC DES MOINES, IOW		3	
4	ICN © 2021, COPY WI					ION	
SCALE	E: 1:50	PAGE 1	8 OF 37				

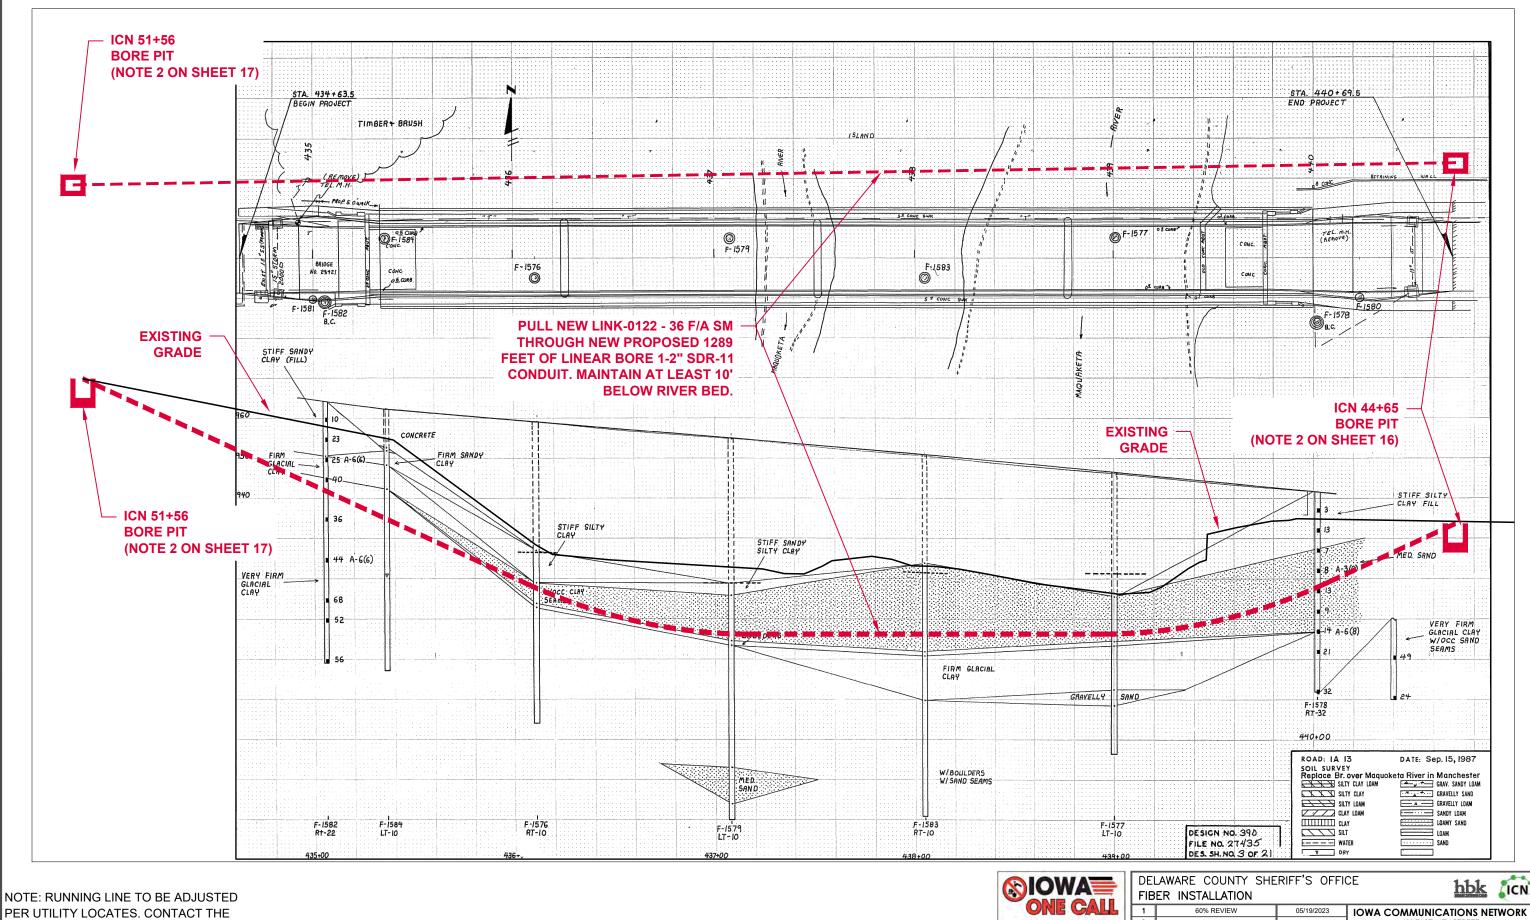

TO ADJUST RUNNING LINE. FILE: H:\Project\230437\dwg\23-0424 DESIGN.dwg

ICN AND MANCHESTER PUBLIC WORKS

1-800-292-8989

2

SCALE: 1:50

IOWA COMMUNICATIONS NETWORK

400 EAST 14TH STREET
GRIMES STATE OFFICE BUILDING


05/19/2023 FOR PERMIT REVIEW 07/06/2023 3 FOR FINAL PERMIT REVIEW 07/12/2023

DES MOINES, IOWA 50319
ICN © 2021, COPY WITH PERMISSION

OSP PROJECT LOG #: 28210105 LINK NAME: 0122

SIZE: 11" X 17" PLAN SHEET 19 SOIL BORE

PAGE 19 OF 37

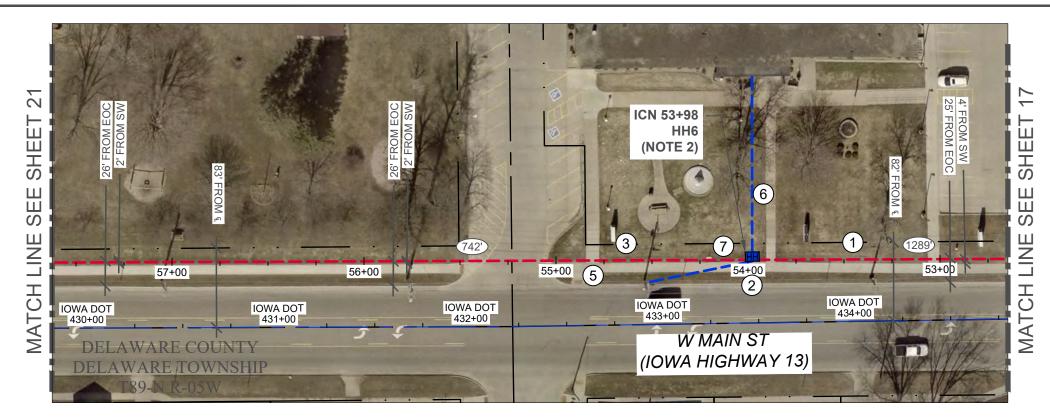

1) PULL NEW LINK-0122 - 36 F/A SM THROUGH NEW 1-2" HDPE CONDUIT. 42" MINIMUM BELOW GRADE.

- ICN STA. 53+98 REMOVE AND REPLACE EXISTING ICN HANDHOLE WITH 30X48X36 HANDHOLE HH6, SPLICE CASE NNS124727 NEW LINK 0122 - 36 F/A SM - 150' COIL FOR FUTURE SPLICE. REPLACE EXISTING LOCATE FACILITEIES WITH TRIVIEW LOCATE PEDESTAL ALONG WITH GROUND ROD AND #6 GROUND WIRE. 4-#12 TRACER WIRE 50' COILS
- (3) PULL NEW LINK-0122 36 F/A SM THROUGH NEW 1-2" HDPE CONDUIT. 42" MINIMUM BELOW GRADE.
- OTHER UTILITY PROVIDERS IN AREA. STAY 36" CLEAR FROM ALL EXISTING UTILITIES.
- WATER MAIN RUNS PARALLEL TO W. MAIN ST. IN NORTH ROW. USE CAUTION WHEN BORING IN THIS **AREA**
- EXISTING ICN LINK 7006. CONTRACTOR TO PROTECT EXISTING ICN FACILITIES.
- EXISTING UPN TIE CABLE IN EXISTING HANDHOLE. CONTRACTOR TO PROTECT EXISTING UPN FACILITIES.

LOOKING WEST



HH6 - ICN STA. 53+98

LOOKING EAST



HH6 - ICN STA. 53+98



HH6 - ICN STA. 53+98



**GRAPHIC SCALE** 

LISTING OF HANDHOLES				
HANDHOLE STATION HANDHOLE STATION LENGTH FT				
HH5	41+09	HH6	53+98	1289
HH6	53+98	HH7	61+40	742
TOTAL				2031

### \* LENGTH DOES NOT INCLUDE SLACKCOILS



DELAWARE		OFFIC
FIBER INST	ALLATION	

SCALE: 1:50


FIBER INSTALLATION							
1	60% I	REVIEW	05/19/2023	IOW			
2	FOR PER	MIT REVIEW	07/06/2023				
3	FOR FINAL P	ERMIT REVIEW	07/12/2023				
4							
SCALE: 1:50 SIZE: 11" X 17"			PLAN SHEET 20				

WA COMMUNICATIONS NETWORK 400 EAST 14TH STREET GRIMES STATE OFFICE BUILDING DES MOINES, IOWA 50319
ICN © 2021, COPY WITH PERMISSION PAGE 20 OF 37

NOTE: RUNNING LINE TO BE ADJUSTED PER UTILITY LOCATES. CONTACT THE ICN AND MANCHESTER PUBLIC WORKS TO ADJUST RUNNING LINE.

OSP PROJECT LOG #: 28210105 LINK NAME: 0122

FILE: H:\Project\230437\dwg\23-0424 DESIGN.dwg

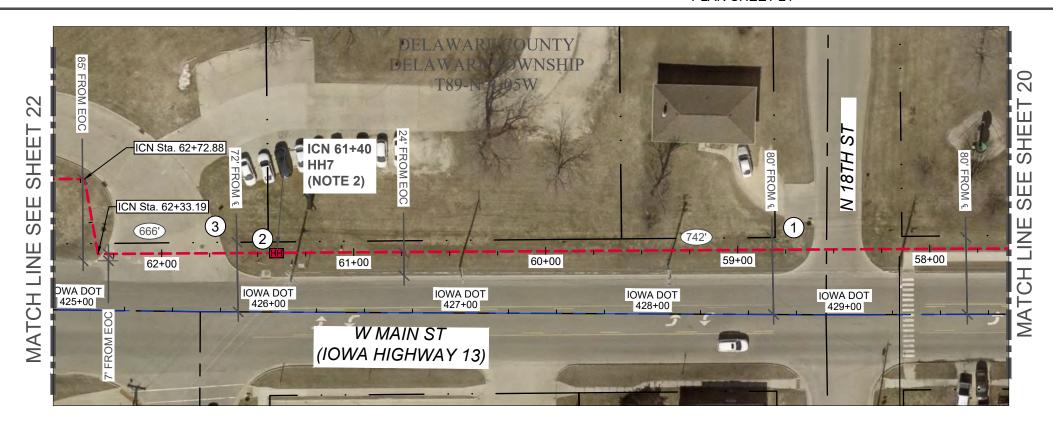

- 1) PULL NEW LINK-0122 36 F/A SM THROUGH NEW 1-2" HDPE CONDUIT. 42" MINIMUM BELOW GRADE.
- (2) ICN STA. 61+40 INSTALL PROPOSED 24"x36"x36" ICN HANDHOLE - HH7. 150' SLACK COIL 36 F/A SM.
- (3) PULL NEW LINK-0122 36 F/A SM THROUGH NEW 1-2" HDPE CONDUIT. 42" MINIMUM BELOW GRADE.
- OTHER UTILITY PROVIDERS IN AREA. STAY 36" CLEAR FROM ALL EXISTING UTILITIES.
- WATER MAIN RUNS PARALLEL TO W. MAIN ST. IN NORTH ROW. USE CAUTION WHEN BORING IN THIS

LOOKING WEST



ICN STA, 60+25

LOOKING EAST



HH7 - ICN STA. 61+40



ICN STA. 62+00

**GRAPHIC SCALE** 

LISTING OF HANDHOLES				
HANDHOLE	STATION	HANDHOLE	STATION	LENGTH FT
HH6	53+98	HH7	61+40	742
HH7	61+40	HH8	68+06	666
TOTAL				1408

### \* LENGTH DOES NOT INCLUDE SLACKCOILS



DELAWAR	Ε	COUNTY	SHERIFF'S	OFFICE
FIBER IN	ST	ALLATION		

LID	FIBER INSTALLATION					
1	60% REVIEW	05/19/2023				
2	FOR PERMIT REVIEW	07/06/2023				
3	FOR FINAL PERMIT REVIEW	07/12/2023				
4						

IOWA COMMUNICATIONS NETWORK

400 EAST 14TH STREET
GRIMES STATE OFFICE BUILDING
DES MOINES, IOWA 50319
ICN © 2021, COPY WITH PERMISSION

NOTE: RUNNING LINE TO BE ADJUSTED PER UTILITY LOCATES. CONTACT THE ICN AND MANCHESTER PUBLIC WORKS TO ADJUST RUNNING LINE.

FILE: H:\Project\230437\dwg\23-0424 DESIGN.dwg

OSP PROJECT LOG #: 28210105 LINK NAME: 0122

SCALE: 1:50

SIZE: 11" X 17" PLAN SHEET 21

PAGE 21 OF 37




- 1 PULL NEW LINK-0122 36 F/A SM THROUGH NEW 1-2" HDPE CONDUIT. 42" MINIMUM BELOW GRADE.
- OTHER UTILITY PROVIDERS IN AREA. STAY 36" CLEAR FROM ALL EXISTING UTILITIES.
- (3) HIGHWAY 13 EDGE OF PAVEMENT AND DOT ROW ARE NOT PARALLEL





ICN STA. 62+50

NOTE: RUNNING LINE TO BE ADJUSTED PER UTILITY LOCATES. CONTACT THE ICN AND MANCHESTER PUBLIC WORKS TO ADJUST RUNNING LINE. FILE: H:\Project\230437\dwg\23-0424 DESIGN.dwg



LISTING OF HANDHOLES					
HANDHOLE STATION HANDHOLE STATION LENGTH FT					
HH7	638				
TOTAL				638	

### \* LENGTH DOES NOT INCLUDE SLACKCOILS



DELAWARE	COUNTY	SHERIFF'S I	OFFICE
FIBER INS	TALLATION		

טו ו	TIDEN INSTALLATION							
1	60% I	05/19/2023						
2	FOR PER	07/06/2023						
3	FOR FINAL P	ERMIT REVIEW	07/12/2023					
4								
SCALE: 1:50		SIZE: 11" X 17"	PLAN SHEET 22					


IOWA COMMUNICATIONS NETWORK

400 EAST 14TH STREET
GRIMES STATE OFFICE BUILDING
DES MOINES, IOWA 50319
ICN © 2021, COPY WITH PERMISSION

hbk (icn

OSP PROJECT LOG #: 28210105 LINK NAME: 0122 SCALE: 1:50

PAGE 22 OF 37

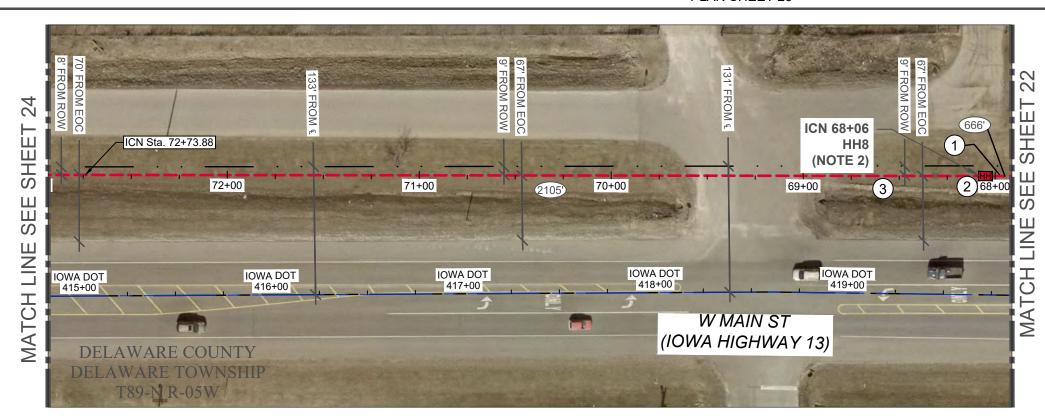

- 1) PULL NEW LINK-0122 36 F/A SM THROUGH NEW 1-2" HDPE CONDUIT. 42" MINIMUM BELOW GRADE.
- (2) ICN STA. 68+06 INSTALL PROPOSED 24"x36"x36" ICN HANDHOLE - HH8. 150' SLACK COIL 36 F/A SM.
- (3) PULL NEW LINK-0122 36 F/A SM THROUGH NEW 1-2" HDPE CONDUIT. 42" MINIMUM BELOW GRADE.
- OTHER UTILITY PROVIDERS IN AREA. STAY 36" CLEAR FROM ALL EXISTING UTILITIES.
- HIGHWAY 13 EDGE OF PAVEMENT AND DOT ROW ARE NOT PARALLEL

LOOKING EAST




LOOKING SOUTH



HH8 - ICN STA. 68+06



HH8 - ICN STA. 68+06



	LISTING	OF HANDHO	LES	
HANDHOLE	LENGTH FT			
HH7	61+40	HH8	68+06	666
HH8	68+06	HH9	89+11	2105
	TOTAL	-		2771

### \* LENGTH DOES NOT INCLUDE SLACKCOILS

**AWOI** 1-800-292-8989

DELAWARE		OFFIC
FIBER INST	ALLATION	

FIBER INSTALLATION						
1	60% REVIEW	05/19/2023				
2	FOR PERMIT REVIEW	07/06/2023				
3	FOR FINAL PERMIT REVIEW	07/12/2023				
4						

IOWA COMMUNICATIONS NETWORK

400 EAST 14TH STREET
GRIMES STATE OFFICE BUILDING
DES MOINES, IOWA 50319
ICN © 2021, COPY WITH PERMISSION

PER UTILITY LOCATES. CONTACT THE ICN AND MANCHESTER PUBLIC WORKS TO ADJUST RUNNING LINE.

NOTE: RUNNING LINE TO BE ADJUSTED


SCALE: 1:50 SIZE: 11" X 17" PLAN SHEET 23 PAGE 23 OF 37

hbk (icn


FILE: H:\Project\230437\dwg\23-0424 DESIGN.dwg

HH8 - ICN STA. 68+06

OSP PROJECT LOG #: 28210105 LINK NAME: 0122

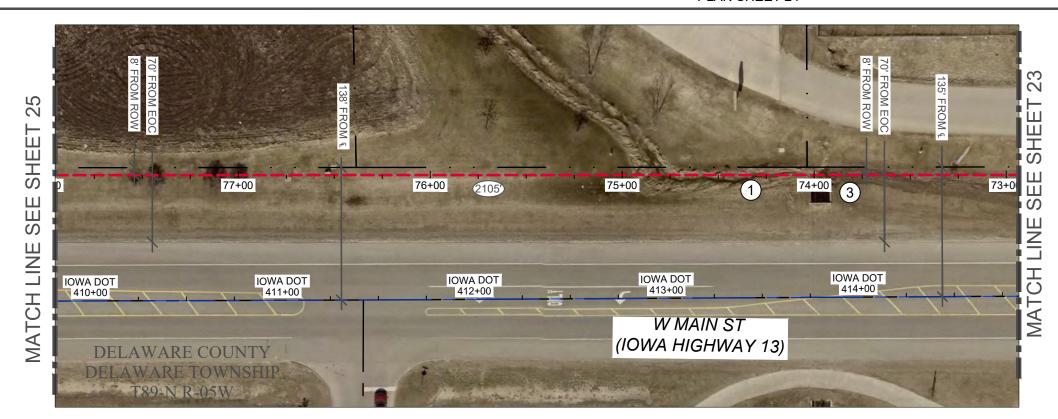

- PULL NEW LINK-0122 36 F/A SM THROUGH NEW 1-2" HDPE CONDUIT. 42" MINIMUM BELOW GRADE.
- OTHER UTILITY PROVIDERS IN AREA. STAY 36" CLEAR FROM ALL EXISTING UTILITIES.
- CONTRACTOR TO MAINTAIN DEPTH OF 10' BELOW FLOWLINE AT EXISTING CULVERT



	LISTING OF HANDHOLES					
	HANDHOLE STATION HANDHOLE STATION LENGTH F					
Ī	HH8	2105				
		2105				

**EAWOI** 1-800-292-8989

DELAWARE	COUNTY	SHERIFF'S	OFFICE
FIBER INST	<b>FALLATION</b>		

60% REVIEW 05/19/2023 FOR PERMIT REVIEW 07/06/2023 FOR FINAL PERMIT REVIEW 3 07/12/2023

IOWA COMMUNICATIONS NETWORK
400 EAST 14TH STREET
GRIMES STATE OFFICE BUILDING
DES MOINES, IOWA 50319
ICN © 2021, COPY WITH PERMISSION

NOTE: RUNNING LINE TO BE ADJUSTED PER UTILITY LOCATES. CONTACT THE ICN AND MANCHESTER PUBLIC WORKS TO ADJUST RUNNING LINE.

FILE: H:\Project\230437\dwg\23-0424 DESIGN.dwg


SCALE: 1:50

SIZE: 11" X 17" PLAN SHEET 24


OSP PROJECT LOG #: 28210105 LINK NAME: 0122

PAGE 24 OF 37

hbk (icn

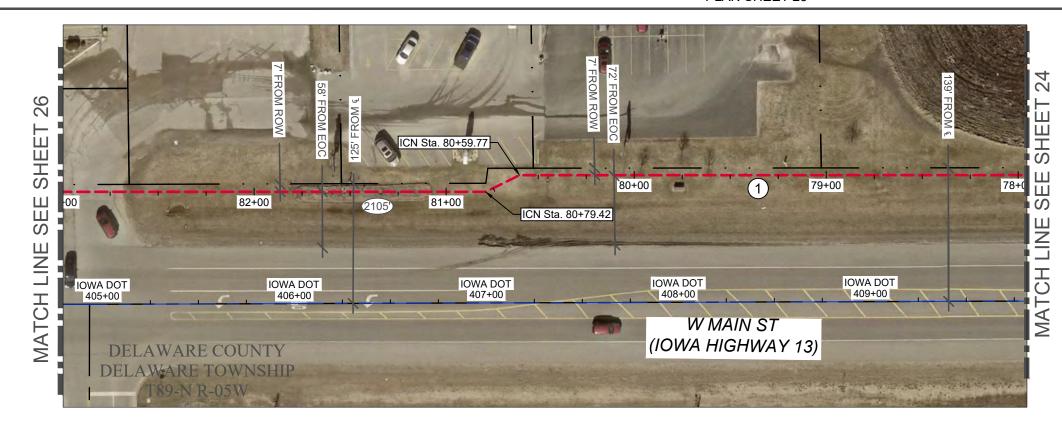

- PULL NEW LINK-0122 36 F/A SM THROUGH NEW 1-2" HDPE CONDUIT. 42" MINIMUM BELOW GRADE.
- OTHER UTILITY PROVIDERS IN AREA. STAY 36" CLEAR FROM ALL EXISTING UTILITIES.



LISTING OF HANDHOLES					
HANDHOLE STATION HANDHOLE STATION LENGTH FT					
HH8	2105				
TOTAL				2105	

SIOWA CALL 1-800-292-8989

DELAWARE COUNTY SHERIFF'S OFFICE
FIBER INSTALLATION

60% REVIEW 05/19/2023 FOR PERMIT REVIEW 07/06/2023 3 FOR FINAL PERMIT REVIEW 07/12/2023


SCALE: 1:50

IOWA COMMUNICATIONS NETWORK
400 EAST 14TH STREET
GRIMES STATE OFFICE BUILDING
DES MOINES, IOWA 50319
ICN © 2021, COPY WITH PERMISSION PAGE 25 OF 37 SIZE: 11" X 17" PLAN SHEET 25


hbk (icn

NOTE: RUNNING LINE TO BE ADJUSTED PER UTILITY LOCATES. CONTACT THE ICN AND MANCHESTER PUBLIC WORKS TO ADJUST RUNNING LINE.

OSP PROJECT LOG #: 28210105 LINK NAME: 0122 FILE: H:\Project\230437\dwg\23-0424 DESIGN.dwg

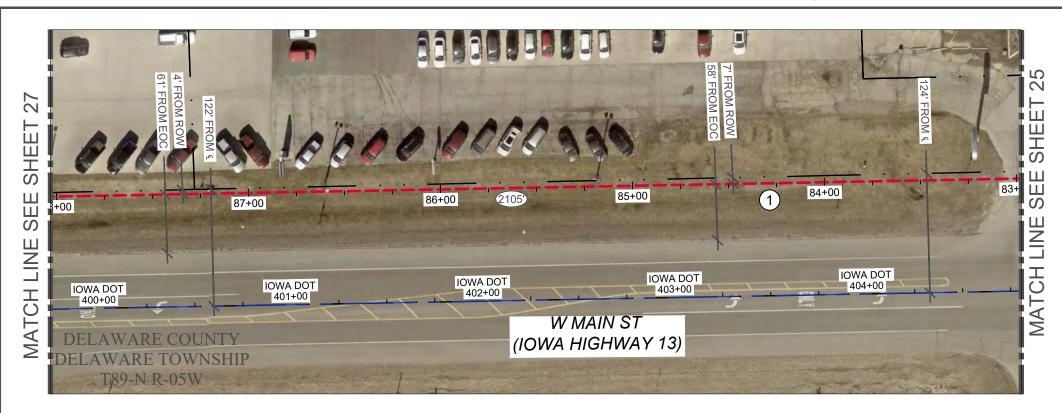

- PULL NEW LINK-0122 36 F/A SM THROUGH NEW 1-2" HDPE CONDUIT. 42" MINIMUM BELOW GRADE.
- OTHER UTILITY PROVIDERS IN AREA. STAY 36" CLEAR FROM ALL EXISTING UTILITIES.



LISTING OF HANDHOLES					
HANDHOLE STATION HANDHOLE STATION LENGTH FT					
HH8	HH8 68+06 HH9 89+11				
	2105				

**WOI** 1-800-292-8989 www.iowaonecall.com

DELAWARE COUNTY SHERIFF'S OFFICE FIBER INSTALLATION

hbk (ich IOWA COMMUNICATIONS NETWORK
400 EAST 14TH STREET
GRIMES STATE OFFICE BUILDING
DES MOINES, IOWA 50319
ICN © 2021, COPY WITH PERMISSION 60% REVIEW 05/19/2023 FOR PERMIT REVIEW 07/06/2023 FOR FINAL PERMIT REVIEW 07/12/2023

PER UTILITY LOCATES. CONTACT THE ICN AND MANCHESTER PUBLIC WORKS TO ADJUST RUNNING LINE.

NOTE: RUNNING LINE TO BE ADJUSTED

FILE: H:\Project\230437\dwg\23-0424 DESIGN.dwg


OSP PROJECT LOG #: 28210105 LINK NAME: 0122

SIZE: 11" X 17" PLAN SHEET 26

PAGE 26 OF 37

SCALE: 1:50

3

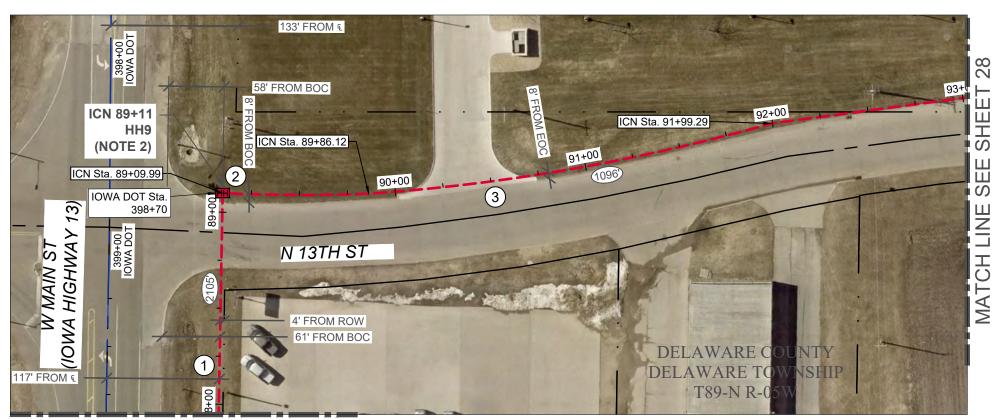

MATCH LINE SEE SHEET 26

### LOOKING NORTH



HH9 - ICN STA, 88+50

LOOKING EAST




HH9 - ICN STA. 88+50

NOTE: RUNNING LINE TO BE ADJUSTED PER UTILITY LOCATES. CONTACT THE ICN AND MANCHESTER PUBLIC WORKS TO ADJUST RUNNING LINE.

1 PULL NEW LINK-0122 - 36 F/A SM THROUGH NEW 1-2" HDPE CONDUIT. 42" MINIMUM BELOW GRADE.

- (2) ICN STA. 89+11 INSTALL PROPOSED 24"x36"x36" ICN HANDHOLE HH9. 100' SLACK COIL 36 F/A SM.
- 3 PULL NEW LINK-0122 36 F/A SM THROUGH NEW 1-2" HDPE CONDUIT. 42" MINIMUM BELOW GRADE.
- 4 OTHER UTILITY PROVIDERS IN AREA. STAY 36" CLEAR FROM ALL EXISTING UTILITIES.
- (5) WATER AND GAS MAIN RUNS PARALLEL TO N. 13TH ST. IN EAST ROW. USE CAUTION WHEN BORING IN THIS AREA



GRAFIIIC SCALE						
	LISTING OF HANDHOLES					
HANDHOLE	HANDHOLE STATION HANDHOLE STATION					
HH8	68+06	HH9	89+11	2105		
HH9	89+11	HH10	100+07	1096		
	3201					

### \* LENGTH DOES NOT INCLUDE SLACKCOILS




DELAWARE	COUNTY	SHERIFF'S	OFFICE
FIRER INST	ALLATION		

TIDEN INSTALLATION						
1	60% REVIEW	05/19/2023				
2	FOR PERMIT REVIEW	07/06/2023				
3	FOR FINAL PERMIT REVIEW	07/12/2023				
4						


IOWA COMMUNICATIONS NETWORK

400 EAST 14TH STREET
GRIMES STATE OFFICE BUILDING
DES MOINES, IOWA 50319
ICN © 2021, COPY WITH PERMISSION

PAGE 27 OF 37

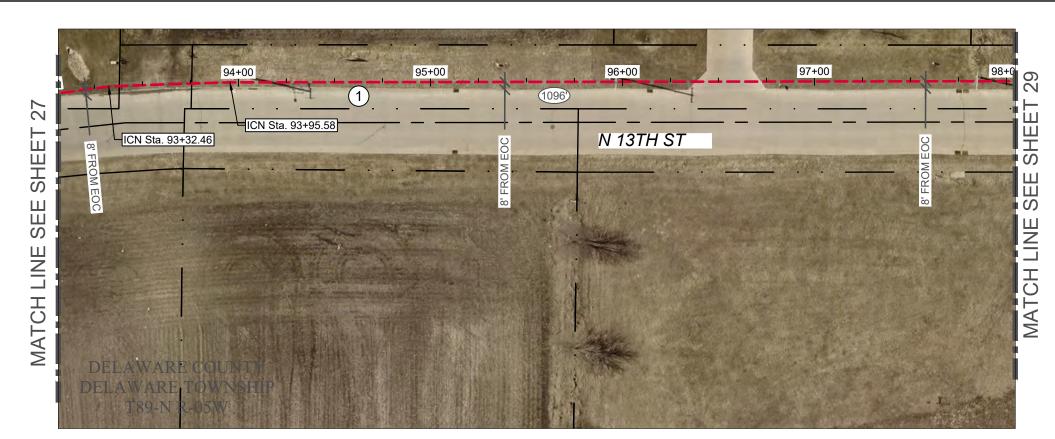

- 1) PULL NEW LINK-0122 36 F/A SM THROUGH NEW 1-2" HDPE CONDUIT. 42" MINIMUM BELOW GRADE.
- 2 OTHER UTILITY PROVIDERS IN AREA. STAY 36" CLEAR FROM ALL EXISTING UTILITIES.
- WATER AND GAS MAIN RUNS PARALLEL TO N. 13TH ST. IN EAST ROW. USE CAUTION WHEN BORING IN THIS AREA



LISTING OF HANDHOLES				
HANDHOLE STATION HANDHOLE STATION LENGTH FT				
HH9	89+11	HH10	100+07	1096
TOTAL				1096

**WOI** 1-800-292-8989

DELAWARE COUNTY SHERIFF'S OFFICE FIBER INSTALLATION

60% REVIEW 05/19/2023 FOR PERMIT REVIEW 07/06/2023 FOR FINAL PERMIT REVIEW 07/12/2023 3

IOWA COMMUNICATIONS NETWORK
400 EAST 14TH STREET
GRIMES STATE OFFICE BUILDING
DES MOINES, IOWA 50319
ICN © 2021, COPY WITH PERMISSION

TO ADJUST RUNNING LINE.

SIZE: 11" X 17" PLAN SHEET 28

PAGE 28 OF 37


hbk (ICN

OSP PROJECT LOG #: 28210105 LINK NAME: 0122 SCALE: 1:50

NOTE: RUNNING LINE TO BE ADJUSTED

PER UTILITY LOCATES. CONTACT THE

ICN AND MANCHESTER PUBLIC WORKS

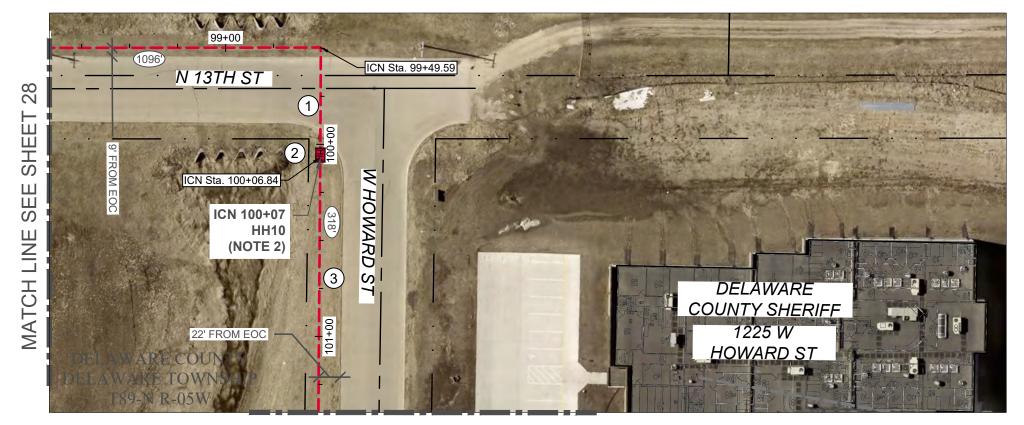

MATCH LINE SEE SHEET 30

- LOOKING SOUTH LOOKING EAST





HH10 - ICN STA. 100+07


NOTE: RUNNING LINE TO BE ADJUSTED PER UTILITY LOCATES. CONTACT THE ICN AND MANCHESTER PUBLIC WORKS TO ADJUST RUNNING LINE.

FILE: H:\Project\230437\dwg\23-0424 DESIGN.dwg

1-800-292-8989

(1) PULL NEW LINK-0122 - 36 F/A SM THROUGH NEW 1-2" HDPE CONDUIT. 42" MINIMUM BELOW GRADE.

- ICN STA. 100+07 INSTALL PROPOSED 24"x36"x36" ICN HANDHOLE -HH10. LINK 0122 - 36 F/A SM. 75' SLACK COIL FOR LOCATE POINT MID-SHEATH CASE. LINK 0123 - 12 F SM. 75' SLACK COIL FOR LOCATE POINT MID-SHEATH CASE. TRI-VIEW LOCATE STATION WITH GROUND ROD. LEAVE 2-#12 TRACER WIRE 50' COILS 1 FOR LOCATE POINT AND 1 CONTINUATION TO SHERIFF STATION DATA ROOM.
- (3) PULL NEW LINK-0123- 12 F SM AND #12 TRACER WIRE THROUGH NEW 1-2" HDPE CONDUIT. 42" MINIMUM BELOW GRADE.
- OTHER UTILITY PROVIDERS IN AREA. STAY 36" CLEAR FROM ALL EXISTING UTILITIES.
- WATER AND GAS MAIN RUNS PARALLEL TO N. 13TH ST. IN EAST ROW. USE CAUTION WHEN BORING IN THIS AREA
- WATER AND GAS MAIN RUNS PARALLEL TO W. HOWARD ST. IN NORTH ROW. USE CAUTION WHEN **BORING IN THIS AREA**



LISTING OF HANDHOLES				
HANDHOLE	STATION	HANDHOLE	STATION	LENGTH FT
HH9	89+11	HH10	100+07	1096
HH10	100+07	EX-HH11	103+25	318
TOTAL				1414

### \* LENGTH DOES NOT INCLUDE SLACKCOILS

DELAWARE COUNTY SHERIFF'S OFFICE FIBER INSTALLATION

ICN

60% REVIEW 05/19/2023 FOR PERMIT REVIEW 07/06/2023 FOR FINAL PERMIT REVIEW 07/12/2023 SCALE: 1:50

IOWA COMMUNICATIONS NETWORK 400 EAST 14TH STREET GRIMES STATE OFFICE BUILDING DES MOINES, IOWA 50319
ICN © 2021, COPY WITH PERMISSION

OSP PROJECT LOG #: 28210105 LINK NAME: 0122

SIZE: 11" X 17" PLAN SHEET 29

PAGE 29 OF 37

### MATCH LINE SEE SHEET 29



LOOKING WEST



ICN STA. 102+32

LOOKING SOUTH



EX - HH11 - ICN STA, 103+25

LOOKING NORTH



EX - HH11 - ICN STA. 103+25






EX - HH11 - ICN STA, 103+25

- (1) PULL NEW LINK-0123 12 F SM AND # 12 TRACER WIRE THROUGH NEW 1-2" HDPE CONDUIT. 42" MINIMUM BELOW GRADE.
- ICN STA. 103+25 EXISTING SHERIFF STATION HANDHOLE - EX HH11 . 100' SLACK COIL 12 F SM AND #12 TRACER WIRE
- OTHER UTILITY PROVIDERS IN AREA. STAY 36" CLEAR FROM ALL EXISTING UTILITIES.
- ICN STA. 103+25 PROPOSED CONDUIT TO END AT EXISTING HH11
- 90 DEGREE TRANSITION OF EXISTING CABLE FROM NORTH TO WEST TOWARDS BUILDING MAY BE A SHORT SWEEP. CONTRACTOR MAY ATTEMPT TO PULL THROUGH SMALLER CONDUITS IF LARGER CONDUIT IS BLOCKED
  - IF CONTRACTOR IS UNABLE TO PULL CABLE THROUGH EXISTING CONDUIT, SEE NOTE 6 ON THIS SHEET
- IF EXISTING ENTRANCE CONDUIT IS BLOCKED OR CABLE CANNOT BE PULLED THROUGH IT THEN ALTERNATE PRICE TO BORE NEW CONDUIT FROM STATION 103+25/0+00A TO INTERCEPT EXISTING OWNER CONDUIT AT STATION 1+95A PRIOR TO BUILDING ENTRANCE.

PULL NEW LINK-0123 - 12 F SM AND # 12 TRACER WIRE THROUGH NEW 1-2" HDPE CONDUIT. 42" MINIMUM BELOW GRADE.

ICN STA. 1+95A INSTALL PROPOSED 24"x36"x36" ICN HANDHOLE - HH12 OVER EXISTING BUILDING ENTRANCE CONDUIT. 50' SLACK COIL 12 F SM AND 50' SLACK COIL # 12 TRACER WIRE



LISTING OF HANDHOLES					
HANDHOLE	STATION	HANDHOLE	STATION	LENGTH FT	
HH10	100+07	EX - HH11	103+25	318	
EX - HH11	0+00A	HH12	1+95A	195	
TOTAL				513	

### \* LENGTH DOES NOT INCLUDE SLACKCOILS

1-800-292-8989

DELAWARE	COUNTY	SHERIFF'S	OFFIC
FIRER INIST			

60% REVIEW 05/19/2023 FOR PERMIT REVIEW 07/06/2023 FOR FINAL PERMIT REVIEW 07/12/2023

SCALE: 1:50

IOWA COMMUNICATIONS NETWORK 400 EAST 14TH STREET GRIMES STATE OFFICE BUILDING

TO ADJUST RUNNING LINE. FILE: H:\Project\230437\dwg\23-0424 DESIGN.dwg

NOTE: RUNNING LINE TO BE ADJUSTED

ICN AND MANCHESTER PUBLIC WORKS


PER UTILITY LOCATES. CONTACT THE

OSP PROJECT LOG #: 28210105 LINK NAME: 0122

SIZE: 11" X 17" PLAN SHEET 30

DES MOINES, IOWA 50319
ICN © 2021, COPY WITH PERMISSION

PAGE 30 OF 37

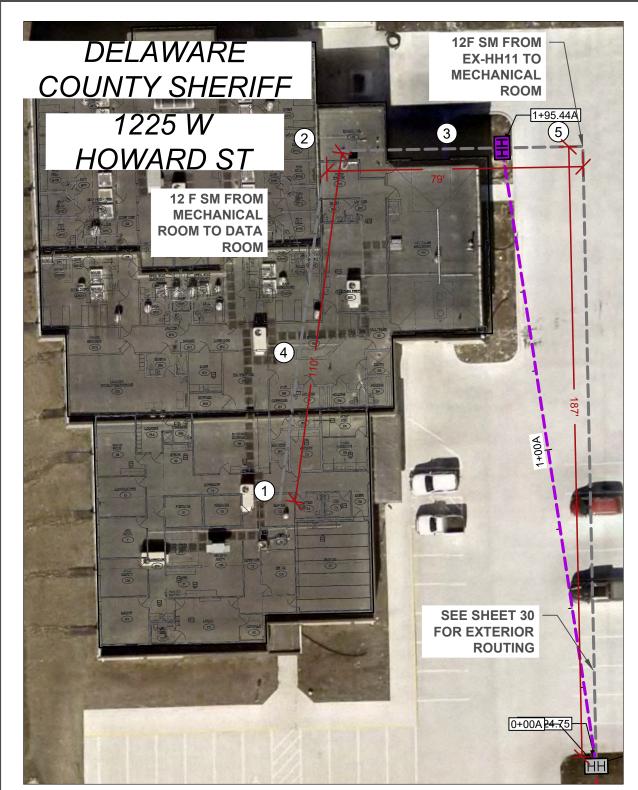









DATA ROOM: TRANSITION CABLE FROM EXISTING HDPE CONDUIT TO DATA RACK CABINET. PULL CABLE TRHOUGH EXISTING HDPE CONDUIT AND ROUTE WITH EXISTING CABLE TO CABLE TRAY AND RACK LOCATION. LEAVE 25' COIL FOR SPLICER. 1ST RACK FROM THE SOUTH

CONDUIT -CONNECTION TO EX-HH12

CONDUIT CONNECTION **TO DATA ROOM** 







MECHANICAL ROOM: TRANSITION CABLE FROM EXISTING HDPE CONDUIT TO HDPE CONDUIT ROUTING TO DATA ROOM. PULL CABLE THROUGH EXISTING HDPE CONDUIT AND ROUTE WITH EXISTING CABLE TO DATA ROOM ENTRY CONDUIT ON WEST WALL.

GROUND TRACER WIRE TO EXISTING GROUND BAR



DELAWARE COUNTY SHERIFF'S OFFICE FIBER INSTALLATION 60% REVIEW 05/19/2023 FOR PERMIT REVIEW 07/06/2023

SCALE: 1:50

IOWA COMMUNICATIONS NETWORK

400 EAST 14TH STREET
GRIMES STATE OFFICE BUILDING

(3) PULL NEW LINK 0123 12 F SM AND #12 TRACER WIRE THROUGH EXISTING HDPE CONDUIT LEADING TO **DELAWARE COUNTY SHERIFFS STATION** MECHANICAL ROOM. APPROXIMATELY 266' FROM EX-HH11 TO MECHANICAL ROOM


PULL NEW LINK 0123 12 F SM THROUGH EXISTING HDPE CONDUIT LEADING TO DELAWARE COUNTY SHERIFFS STATION DATA ROOM. APPROXIMATELY 134' FROM MECHANICAL ROOM TO DATA ROOM

90 DEGREE TRANSITION OF EXISTING CABLE FROM NORTH TO WEST TOWARDS BUILDING MAY BE A SHORT **SWEEP** 

SEE NOTE 6 ON SHEET 30 IF CABLE CANNOT BE PULLED THROUGH **EXISTING CONDUIT** 

OSP PROJECT LOG #: 28210105 LINK NAME: 0122

07/12/2023 FOR FINAL PERMIT REVIEW DES MOINES, IOWA 50319
ICN © 2021, COPY WITH PERMISSION SIZE: 11" X 17" PLAN SHEET 31 PAGE 31 OF 37

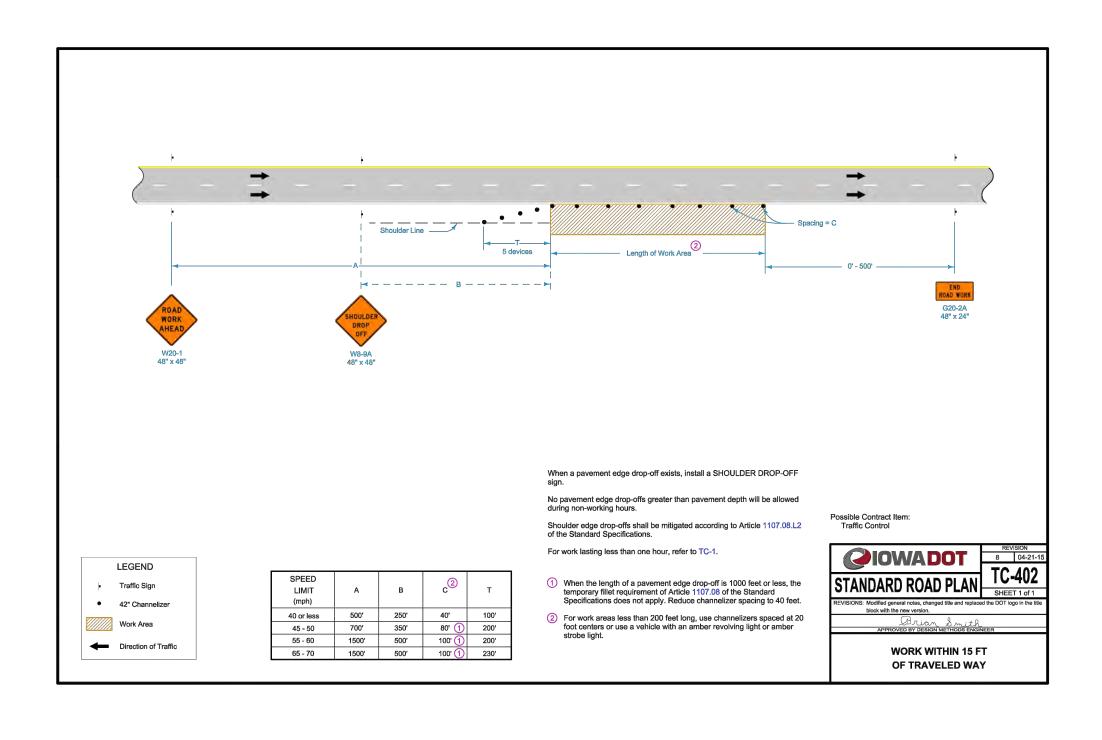

1-800-292-8989

DELAWARE COUNTY SHERIFF'S OFFICE FIBER INSTALLATION 60% REVIEW 05/19/2023 FOR PERMIT REVIEW 07/06/2023


IOWA COMMUNICATIONS NETWORK

400 EAST 14TH STREET
GRIMES STATE OFFICE BUILDING
DES MOINES, 10WA 50319
ICN © 2019, COPY WITH PERMISSION

2 3 07/12/2023 FOR FINAL PERMIT REVIEW SCALE: NONE SIZE: 11" X 17" ETC402

<u>hbk</u>

ICN

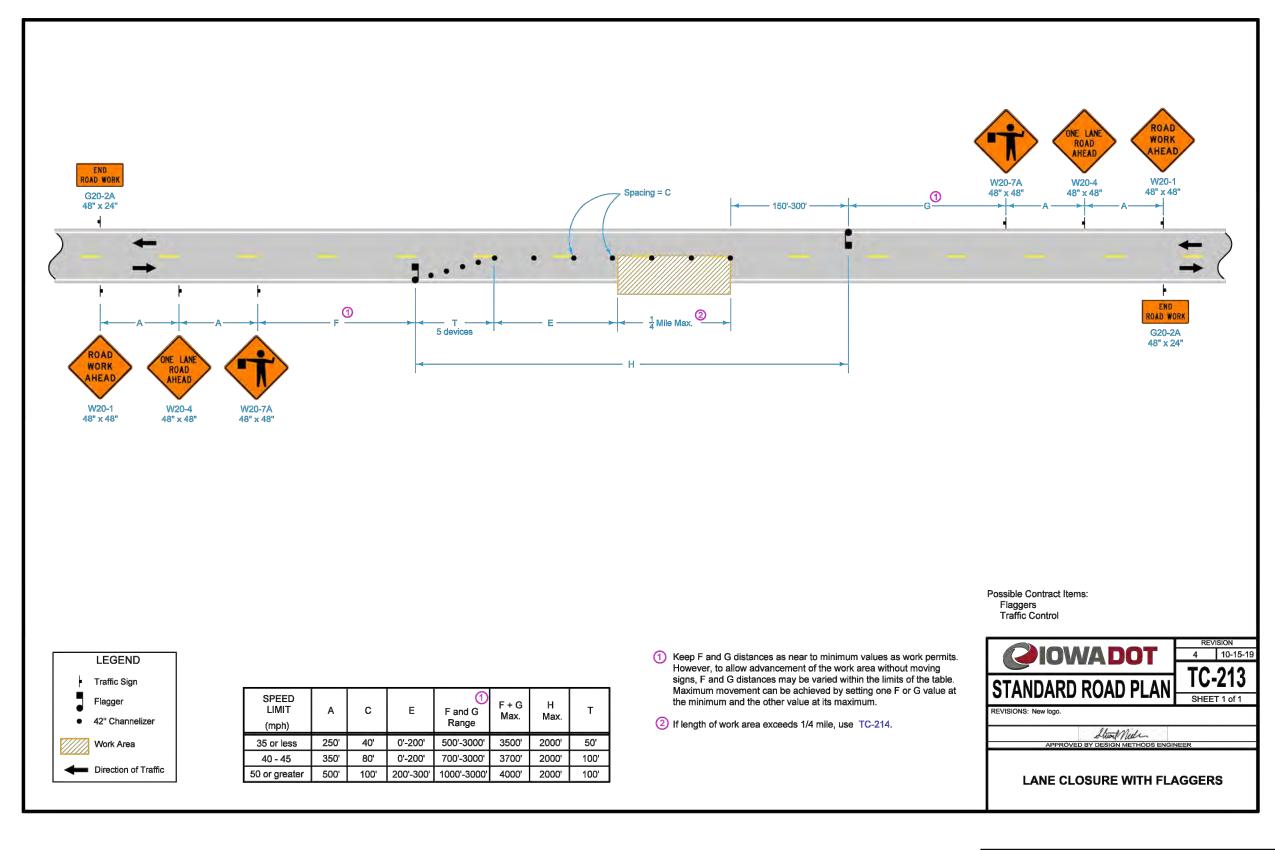

1-800-292-8989

DELAWARE COUNTY SHERIFF'S OFFICE FIBER INSTALLATION 2


hbk (ich

IN INSTAL	LATION			
60% REVIEW		05/19/2023	IOWA COMMUNICATIONS NETWORN 400 EAST 14TH STREET GRIMES STATE OFFICE BUILDING DES MOINES, IOWA 50319 ICN © 2019, COPY WITH PERMISSION	
FOR PERMIT REVIEW		07/06/2023		
FOR FINAL PERMIT REVIEW		07/12/2023		
NONE	SIZE: 11" X 17"	ETC213		PAGE 33 OF 37

FILE: H:\Project\230437\dwg\23-0424 DETAILS.dwg

OSP PROJECT LOG #: 28210105 LINK NAME: 0122

SCALE: NONE

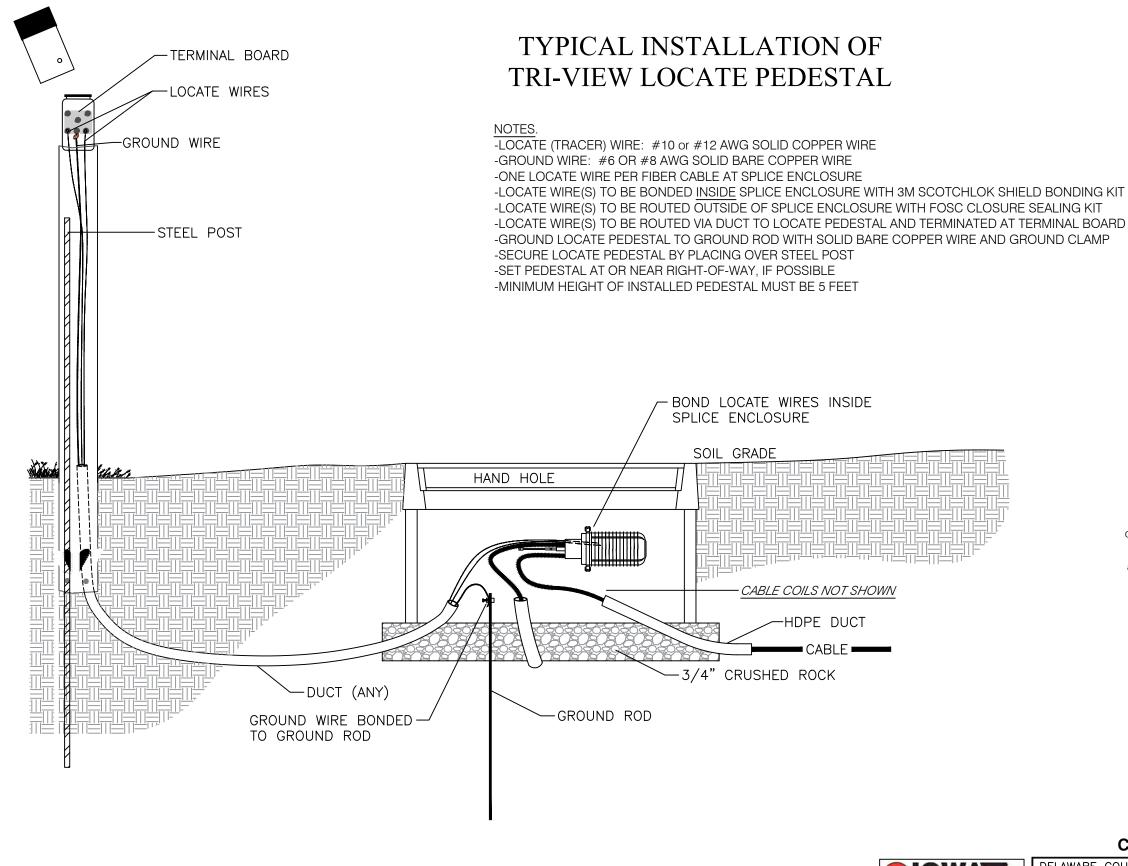


### TRACER WIRE TERMINATION DETAIL

Termination of the locate wire at either a pedestal, puck, or in a splice case shall be made in the following fashion:

Strip off a minimum of ¾" of insulation. Using a needle nose pliers bend a wire "eyelet" on the wire end in a clockwise manner. Use a flat washer on both sides of the wire eyelet when cinching it down on the stud. Flat washers shall be of appropriate size such that the hole matches the diameter of the stud and the outside diameter of the flat washer matches reasonably close to the eyelet diameter.





### **CONSTRUCTION DOCUMENT**

ONE CALL

1-800-292-8989

www.iowdonecoil.com

DELAWARE COUNTY SHERIFF'S OFFICE FIBER INSTALLATION

 1
 60% REVIEW
 05/19/2023

 2
 FOR PERMIT REVIEW
 07/06/2023

 3
 FOR FINAL PERMIT REVIEW
 07/12/2023

 4
 SCALE: NONE
 SIZE: 11" X 17" TRI-VIEW LOCATE


IOWA COMMUNICATIONS NETWORK

400 EAST 14TH STREET
GRIMES STATE OFFICE BUILDING
DES MOINES, IOWA 50319
ICN © 2019, COPY WITH PERMISSION


PAGE 34 OF 37

<u>hbk</u>


ICN

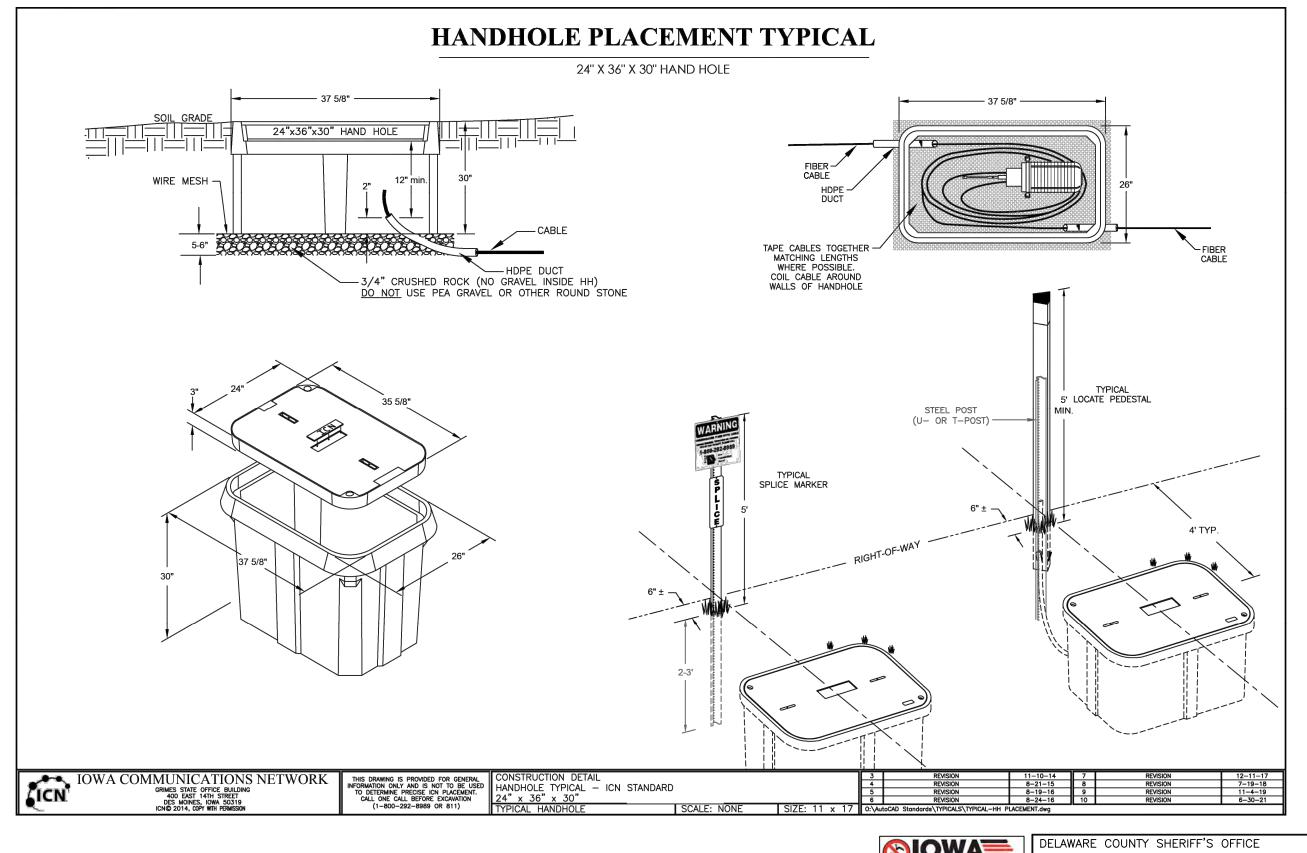





# WARNING MARKER INSTALLATION DETAIL

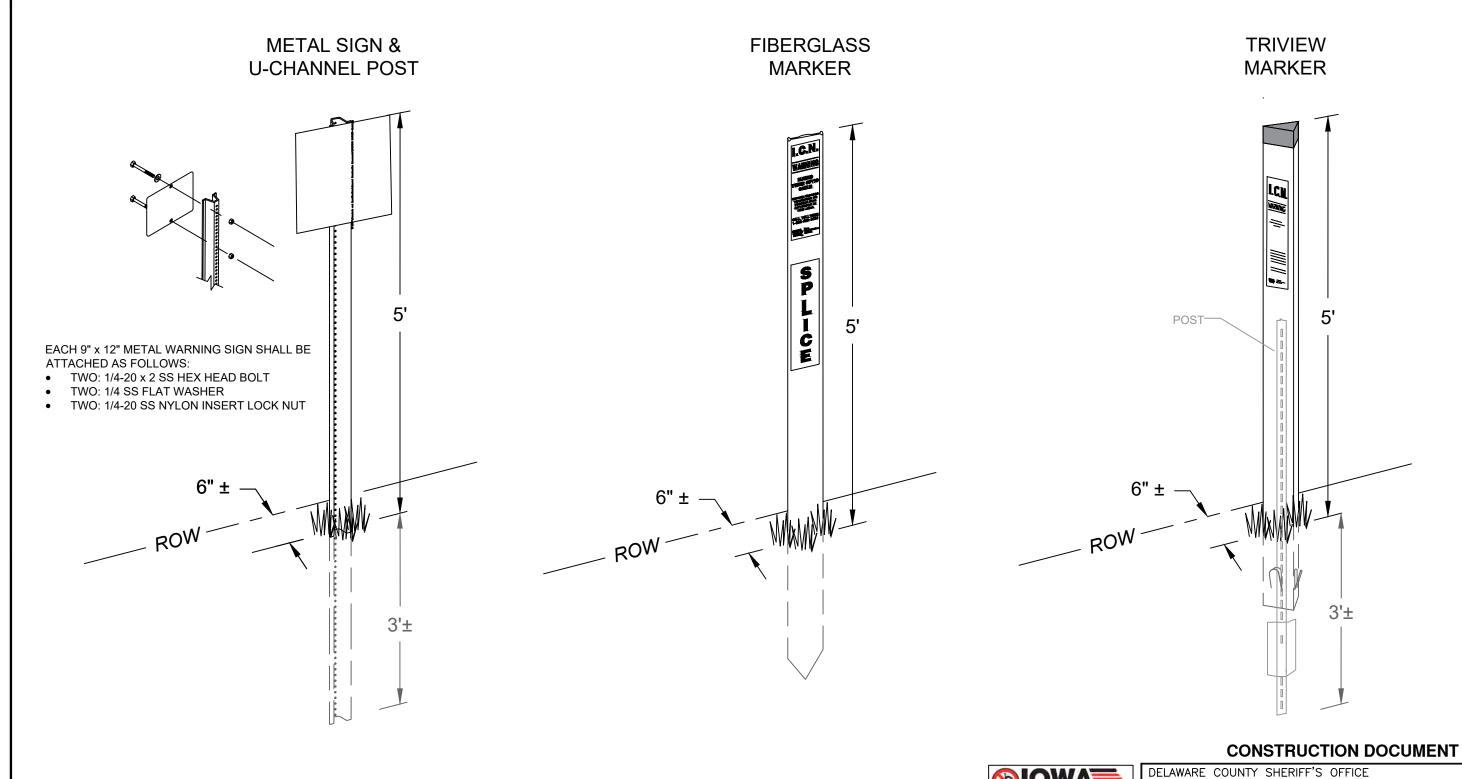

FILE: H:\Project\230437\dwg\23-0424 DETAILS.dwg

OSP PROJECT LOG #: 28210105 LINK NAME: 0122

1-800-292-8989

FIBER INSTALLATION 05/19/2023


FOR PERMIT REVIEW 07/06/2023 FOR FINAL PERMIT REVIEW 07/12/2023

IOWA COMMUNICATIONS NETWORK
400 EAST 14TH STREET
GRIMES STATE OFFICE BUILDING

SIZE: 11" X 17" WARNING MARKER


DES MOINES, IOWA 50319
ICN © 2019, COPY WITH PERMISSION PAGE 36 OF 37

ICN




MAINTAIN A MINIMUM OF AT LEAST 3 FEET OF SEPARATION IN ANY DIRECTION BETWEEN DIRECTIONAL BORE AND ALL EXISTING FACILITIES.

### UTILITY SEPARATION DETAIL

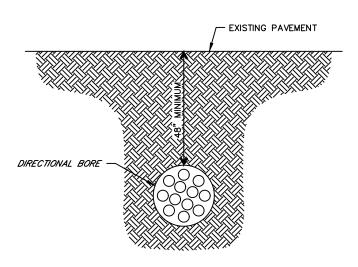

DIRECTIONAL BORING DETAIL

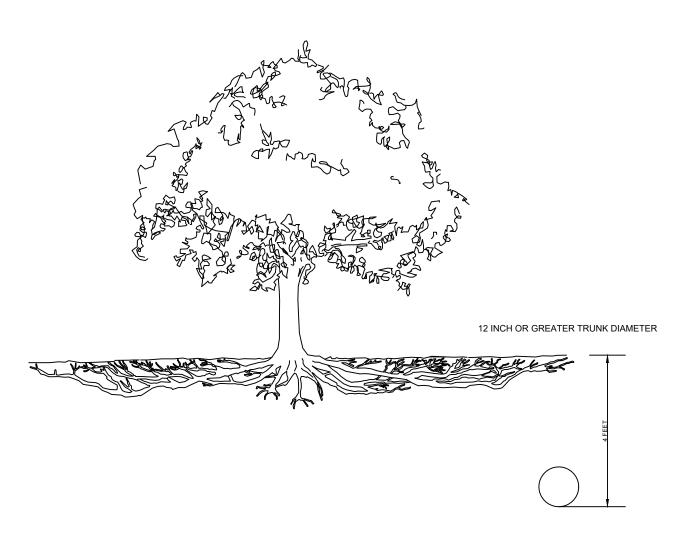

TREE PROTECTION - TUNNELING



DELAWARE COUNTY SHERIFF'S OFFICE FIBER INSTALLATION					
1	1 60% REVIEW		05/19/2	023	10
2	2 FOR PERMIT REVIEW		07/06/2	023	



07/12/2023