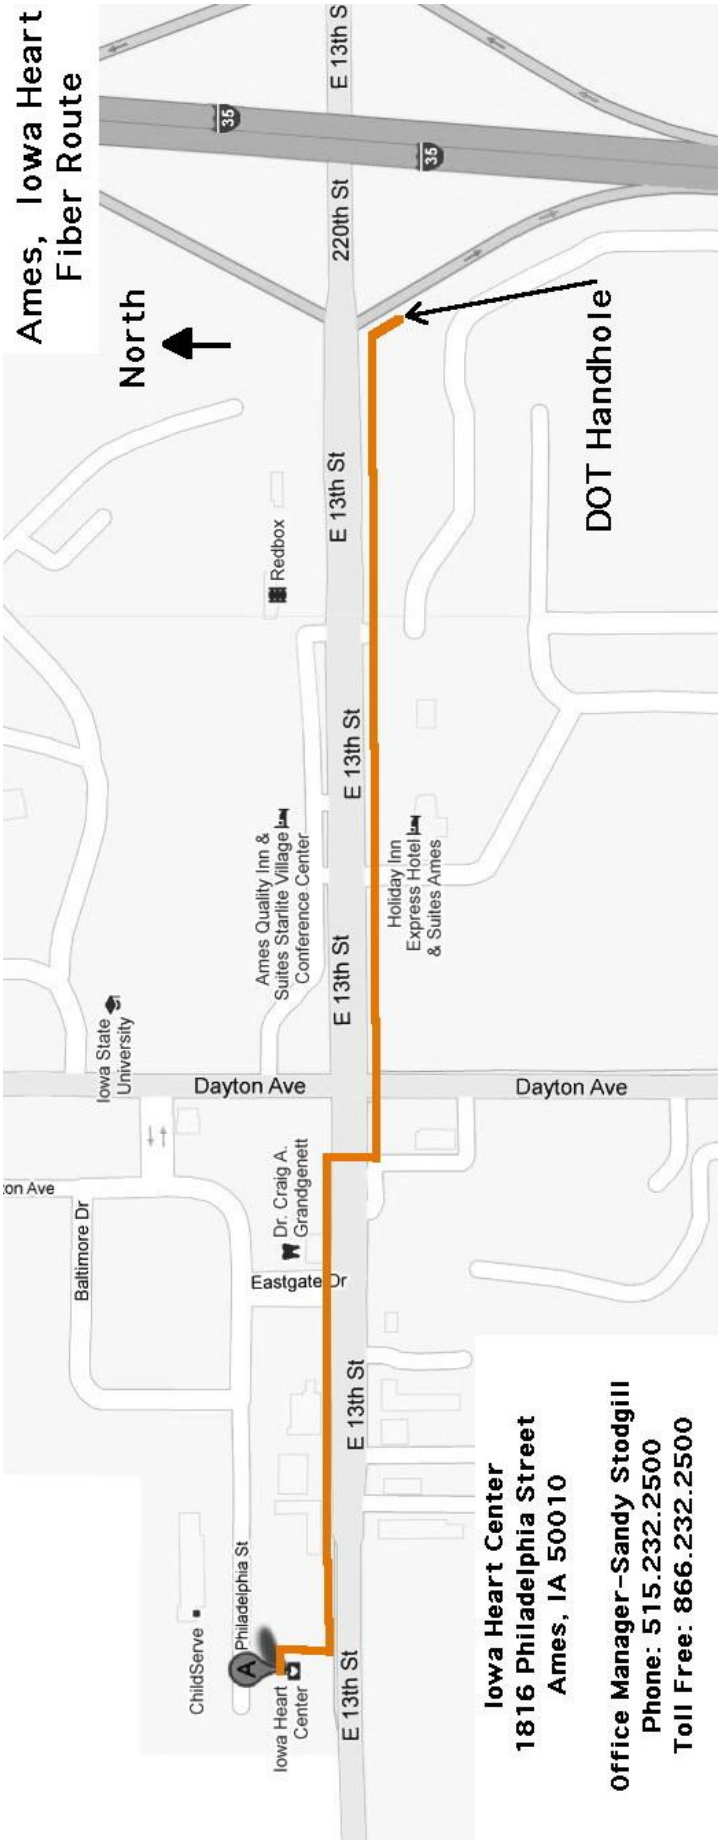
Ames, Iowa Heart
Fiber Route
North
E 13th S
35
35
220th St
DOT Handhole
E 13th St
Redbox
E 13th St
Ames Quality Inn &
Suites Starlite Village
Conference Center
Holiday Inn
Express Hotel
& Suites Ames
E 13th St
Iowa State
University
Dayton Ave
Dayton Ave
on Ave
Baltimore Dr
Dr. Craig A.
Grandgenett
Eastgate Dr
E 13th St
Philadelphia St
ChildServe
Iowa Heart
Center
E 13th St
Iowa Heart Center
1816 Philadelphia Street
Ames, IA 50010
Office Manager-Sandy Stodgill
Phone: 515.232.2500
Toll Free: 866.232.2500

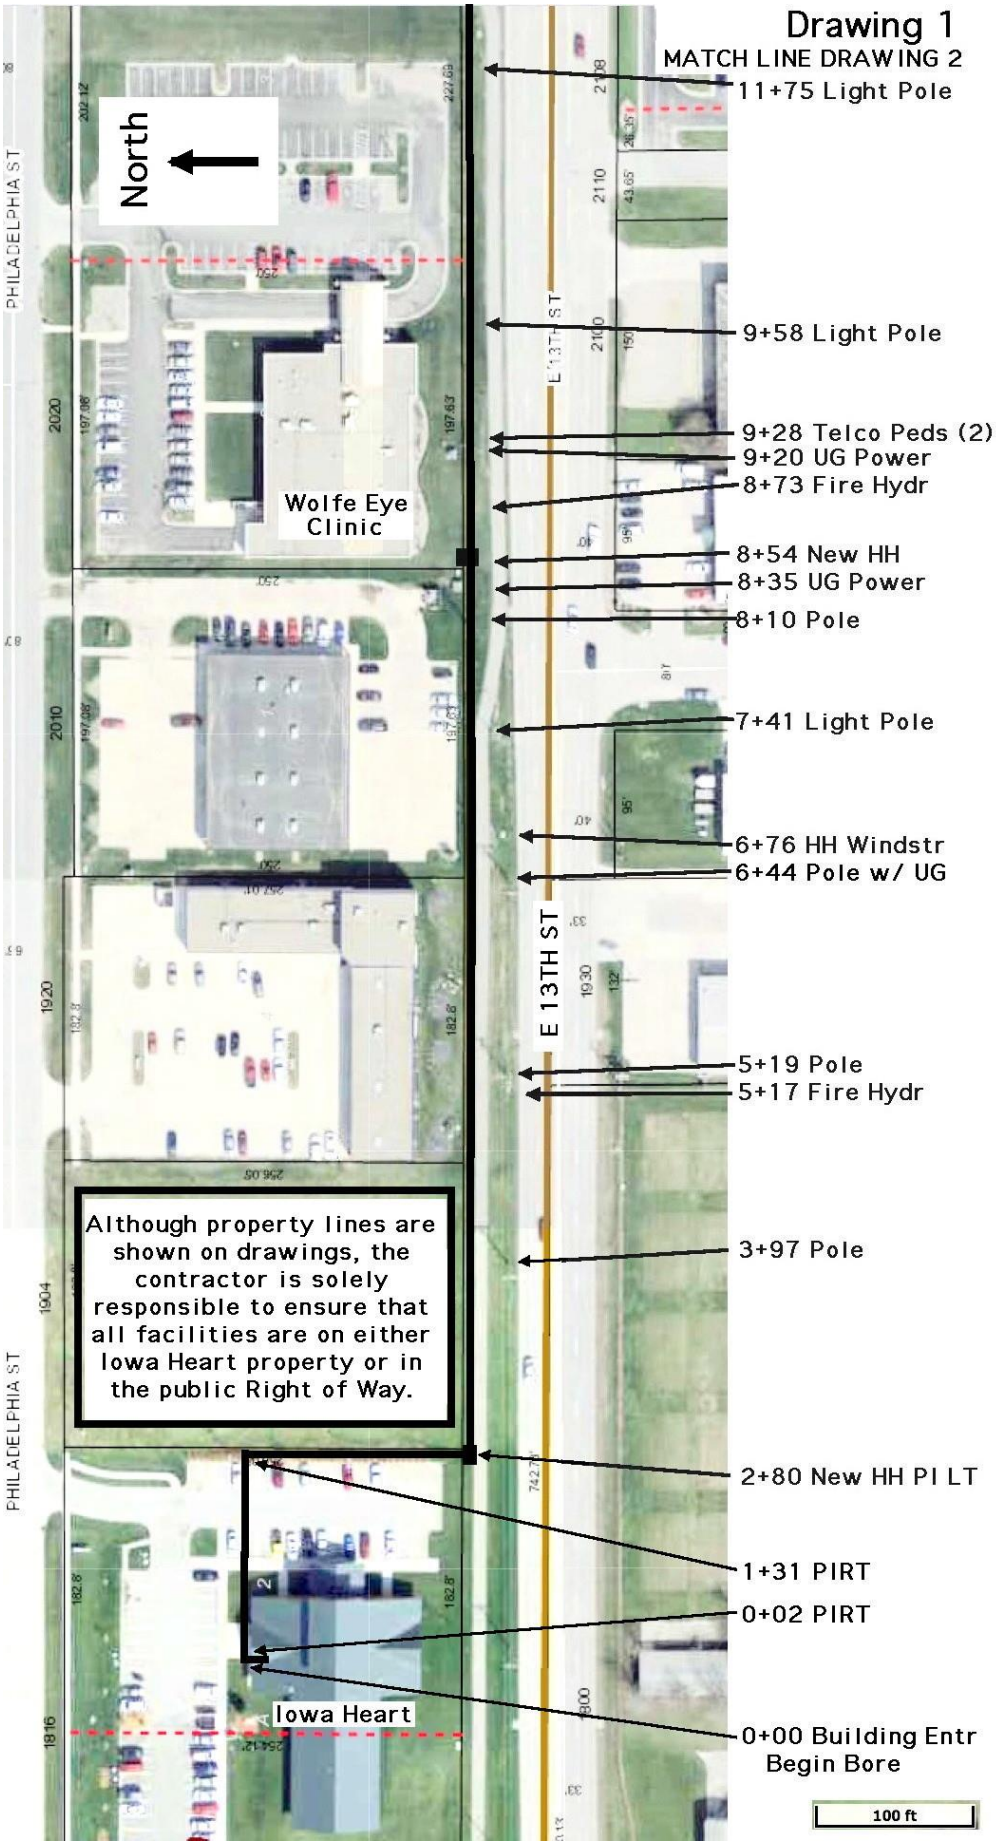
Drawing 1
MATCH LINE DRAWING 2
11+75 Light Pole
9+58 Light Pole
9+28 Telco Peds (2)
9+20 UG Power
8+73 Fire Hydr
8+54 New HH
8+35 UG Power
8+10 Pole
7+41 Light Pole
6+76 HH Windstr
6+44 Pole w/ UG
5+19 Pole
5+17 Fire Hydr
3+97 Pole
2+80 New HH Pl LT
1+31 PIRT
0+02 PIRT
0+00 Building Entr
Begin Bore
100 ft
North
Wolfe Eye Clinic
Iowa Heart
PHILADELPHIA ST
E 13TH ST
Although property lines are shown on drawings, the contractor is solely responsible to ensure that all facilities are on either Iowa Heart property or in the public Right of Way.

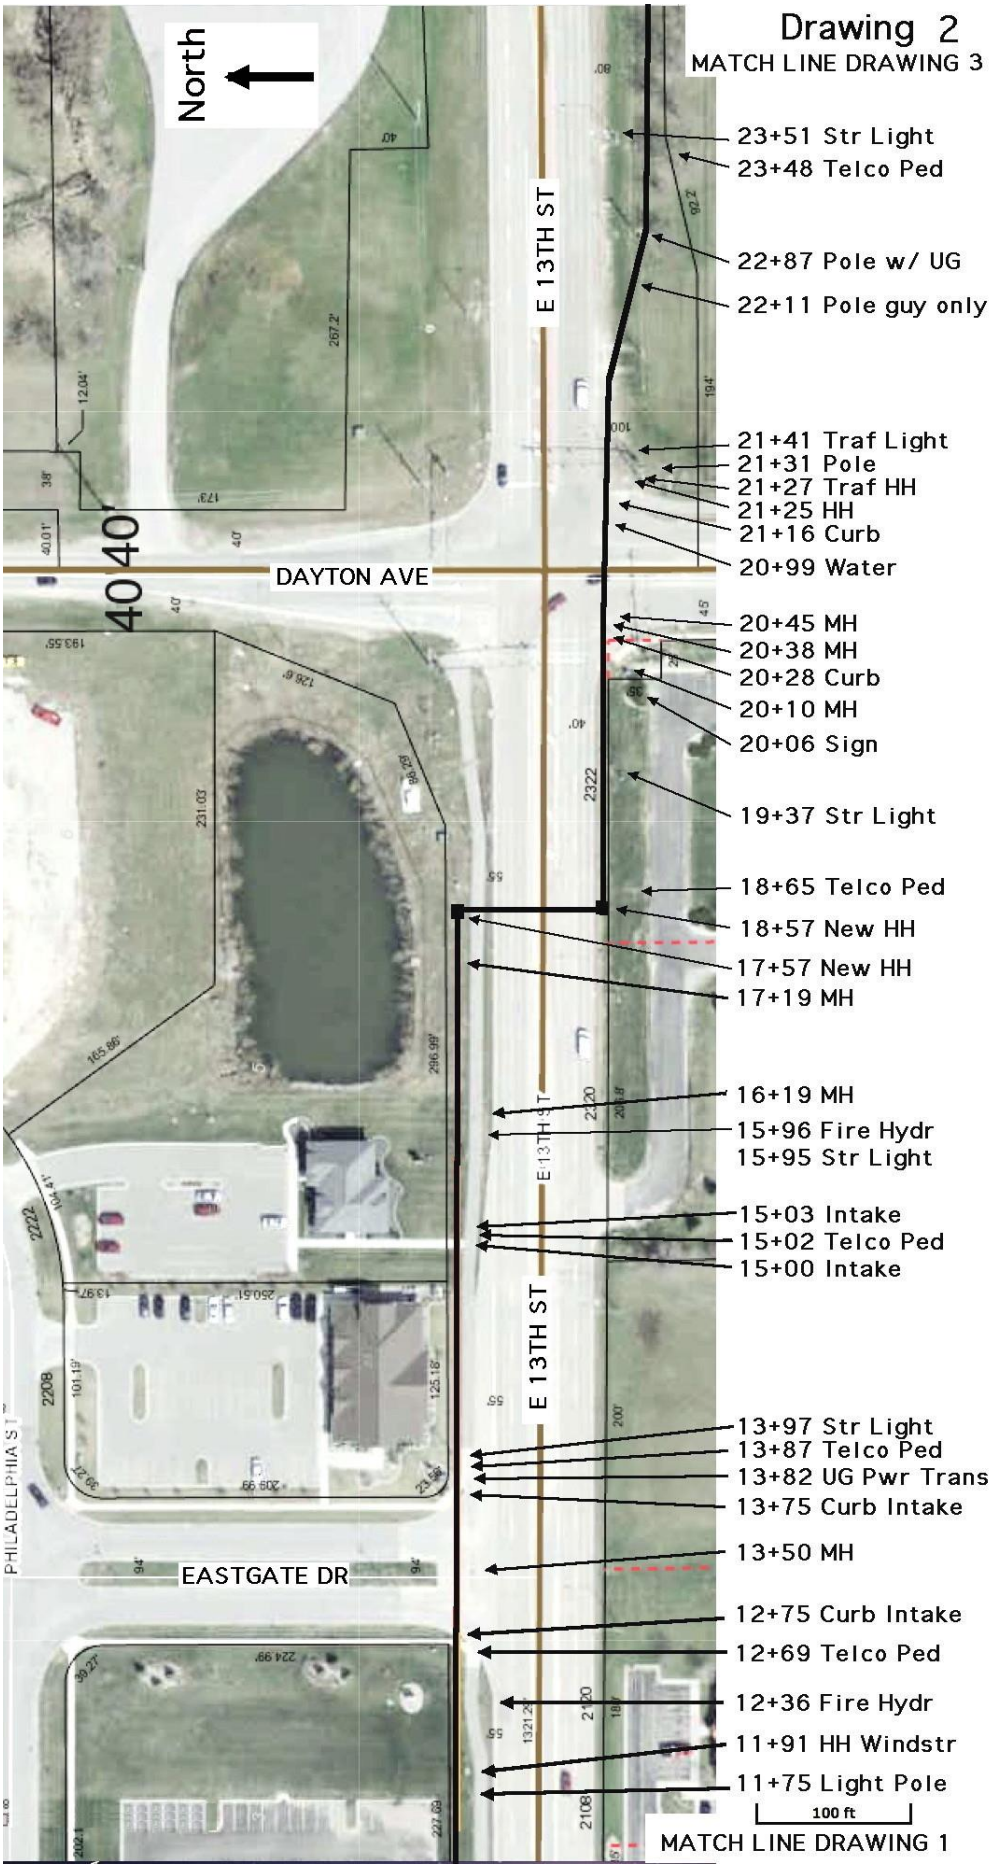
Drawing 2
MATCH LINE DRAWING 3
North
E 13TH ST
DAYTON AVE
EASTGATE DR
PHILADELPHIA ST
23+51 Str Light
23+48 Telco Ped
22+87 Pole w/ UG
22+11 Pole guy only
21+41 Traf Light
21+31 Pole
21+27 Traf HH
21+25 HH
21+16 Curb
20+99 Water
20+45 MH
20+38 MH
20+28 Curb
20+10 MH
20+06 Sign
19+37 Str Light
18+65 Telco Ped
18+57 New HH
17+57 New HH
17+19 MH
16+19 MH
15+96 Fire Hydr
15+95 Str Light
15+03 Intake
15+02 Telco Ped
15+00 Intake
13+97 Str Light
13+87 Telco Ped
13+82 UG Pwr Trans
13+75 Curb Intake
13+50 MH
12+75 Curb Intake
12+69 Telco Ped
12+36 Fire Hydr
11+91 HH Windstr
11+75 Light Pole
100 ft
MATCH LINE DRAWING 1

Drawing 3

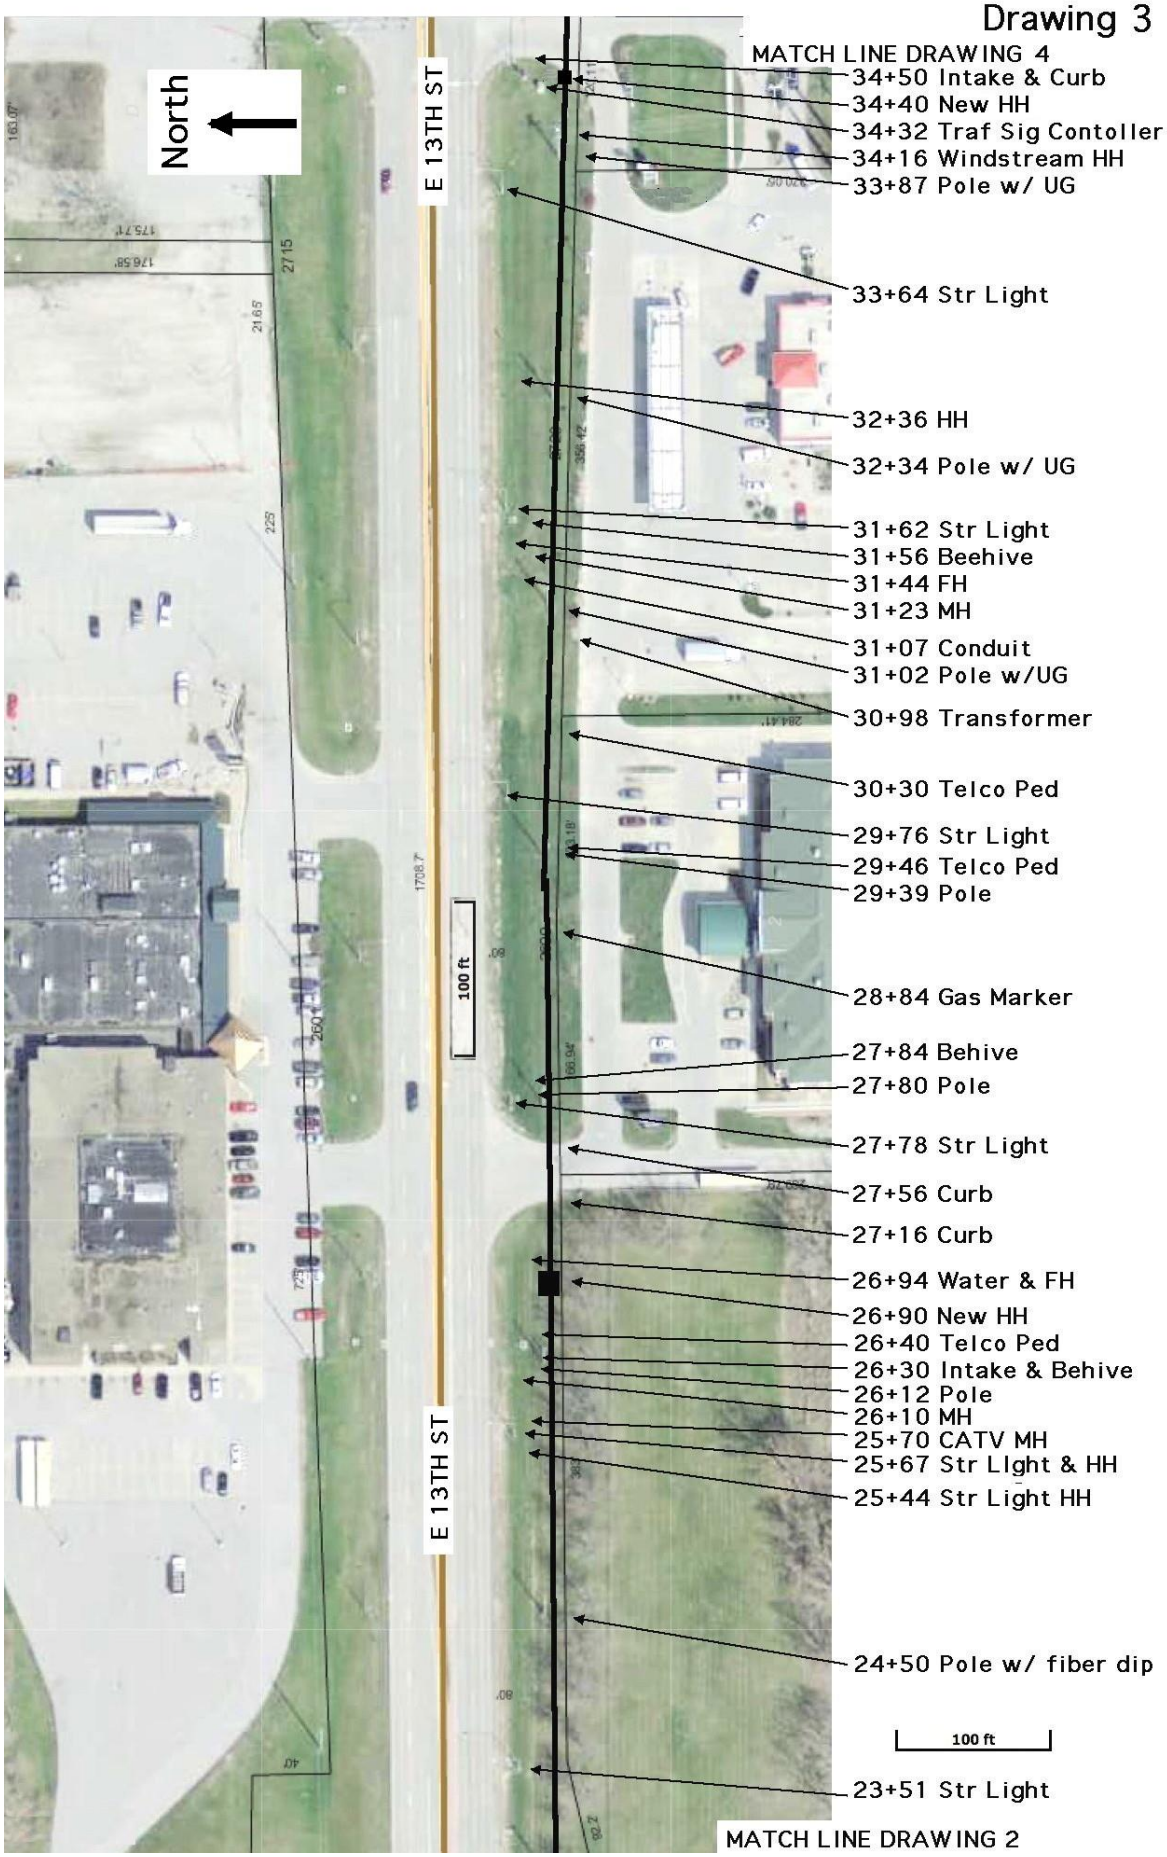
North
E 13TH ST
E 13TH ST
100 ft
100 ft
MATCH LINE DRAWING 4
34+50 Intake & Curb
34+40 New HH
34+32 Traf Sig Contoller
34+16 Windstream HH
33+87 Pole w/ UG
33+64 Str Light
32+36 HH
32+34 Pole w/ UG
31+62 Str Light
31+56 Beehive
31+44 FH
31+23 MH
31+07 Conduit
31+02 Pole w/UG
30+98 Transformer
30+30 Telco Ped
29+76 Str Light
29+46 Telco Ped
29+39 Pole
28+84 Gas Marker
27+84 Behive
27+80 Pole
27+78 Str Light
27+56 Curb
27+16 Curb
26+94 Water & FH
26+90 New HH
26+40 Telco Ped
26+30 Intake & Behive
26+12 Pole
26+10 MH
25+70 CATV MH
25+67 Str LIght & HH
25+44 Str Light HH
24+50 Pole w/ fiber dip
23+51 Str Light
MATCH LINE DRAWING 2

Drawing 4

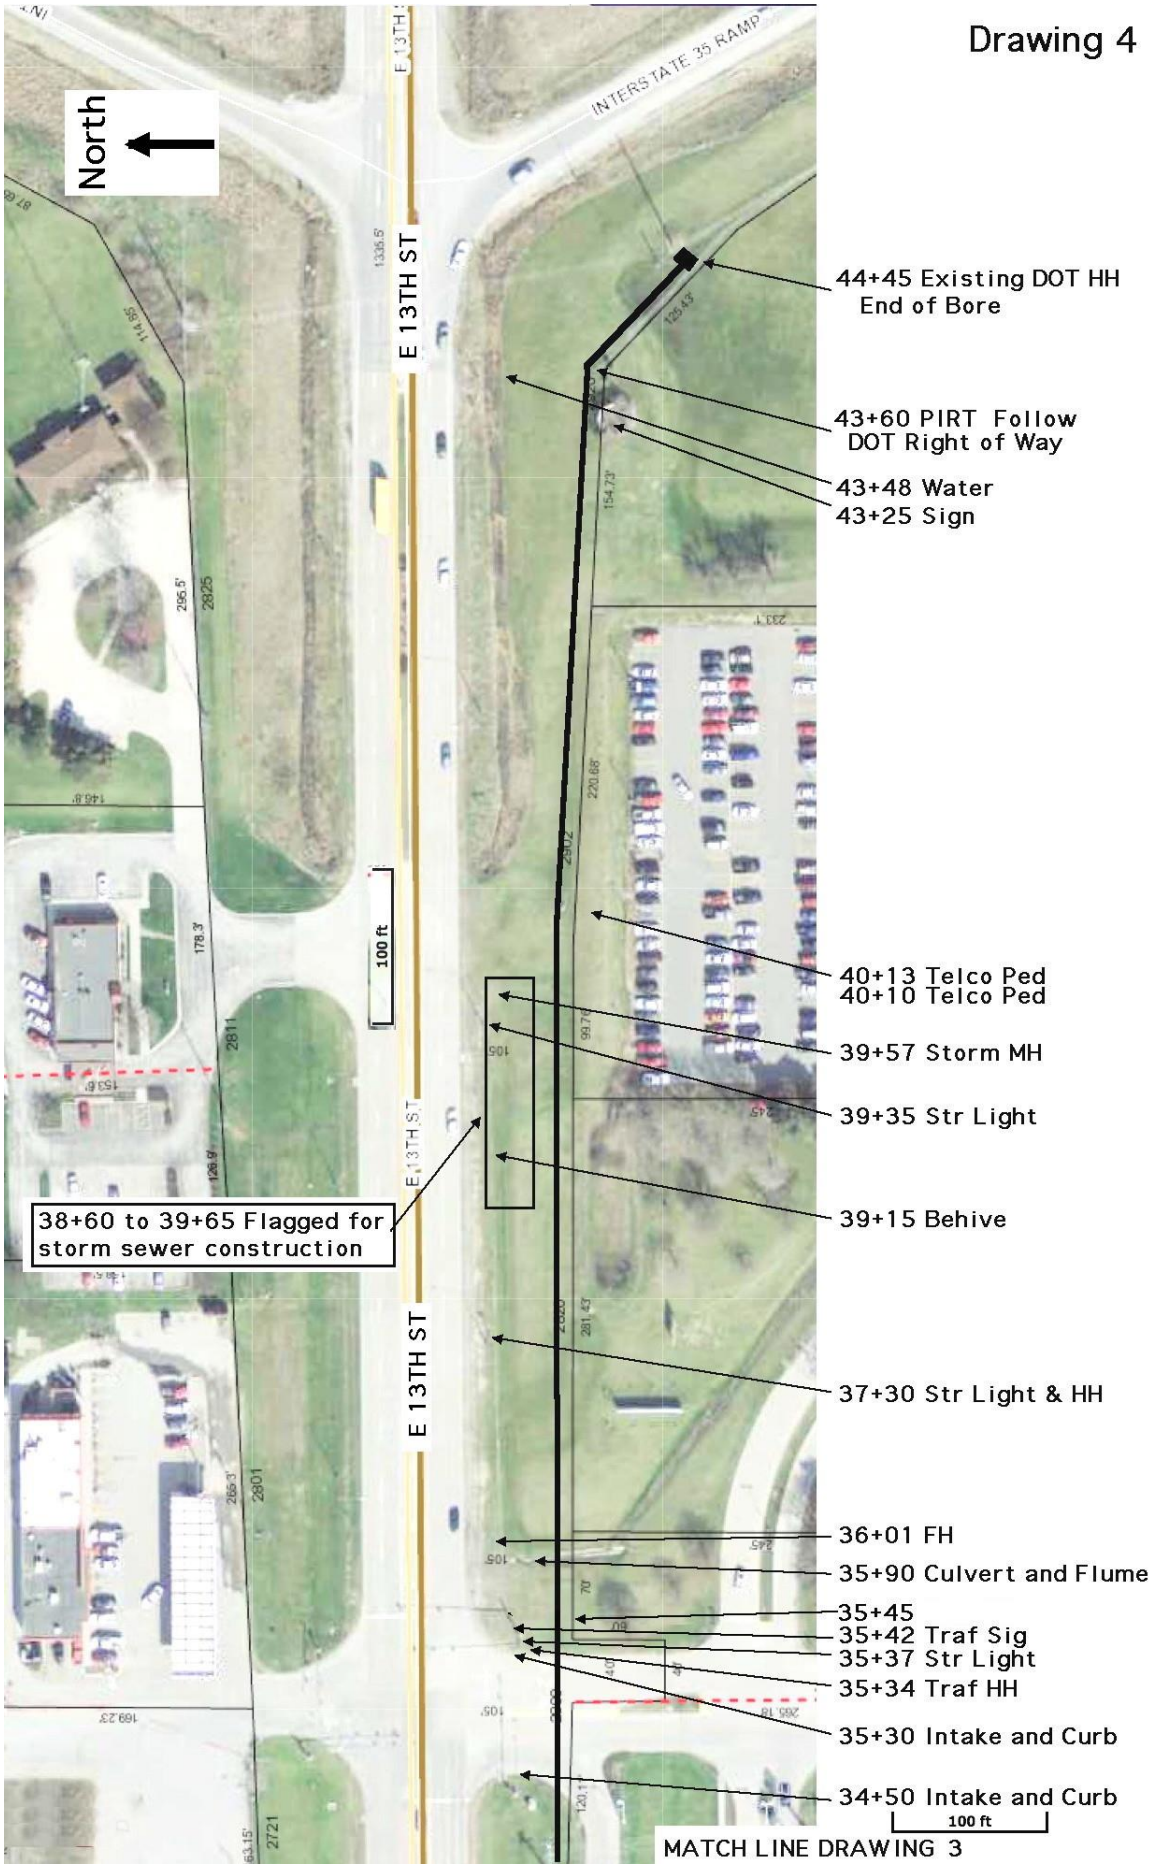
North
E 13TH ST
INTERSTATE 35 RAMP
44+45 Existing DOT HH
End of Bore
43+60 PIRT Follow
DOT Right of Way
43+48 Water
43+25 Sign
40+13 Telco Ped
40+10 Telco Ped
39+57 Storm MH
39+35 Str Light
39+15 Behive
38+60 to 39+65 Flagged for
storm sewer construction
37+30 Str Light & HH
36+01 FH
35+90 Culvert and Flume
35+45
35+42 Traf Sig
35+37 Str Light
35+34 Traf HH
35+30 Intake and Curb
34+50 Intake and Curb
100 ft
MATCH LINE DRAWING 3

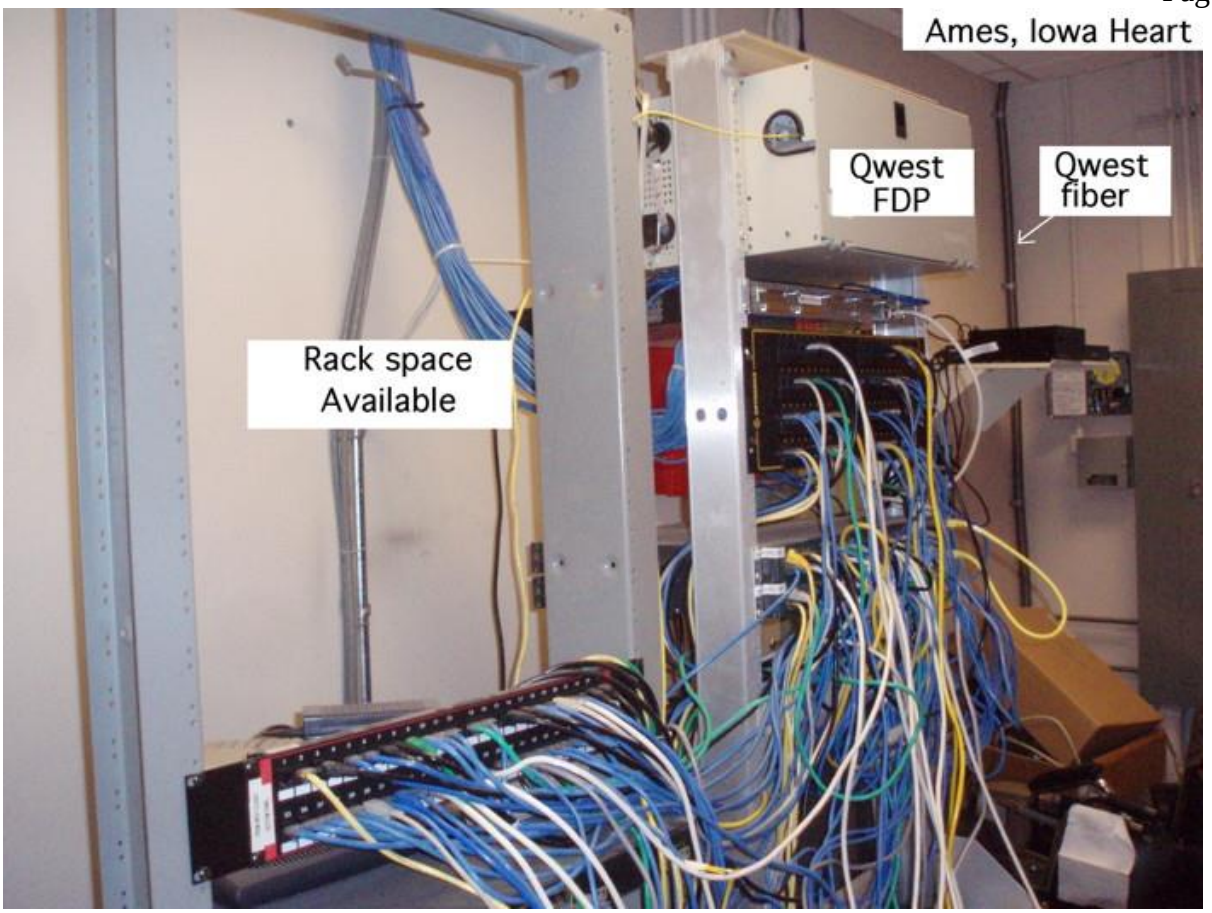
Ames, Iowa Heart
Qwest FDP
Qwest fiber
Rack space Available

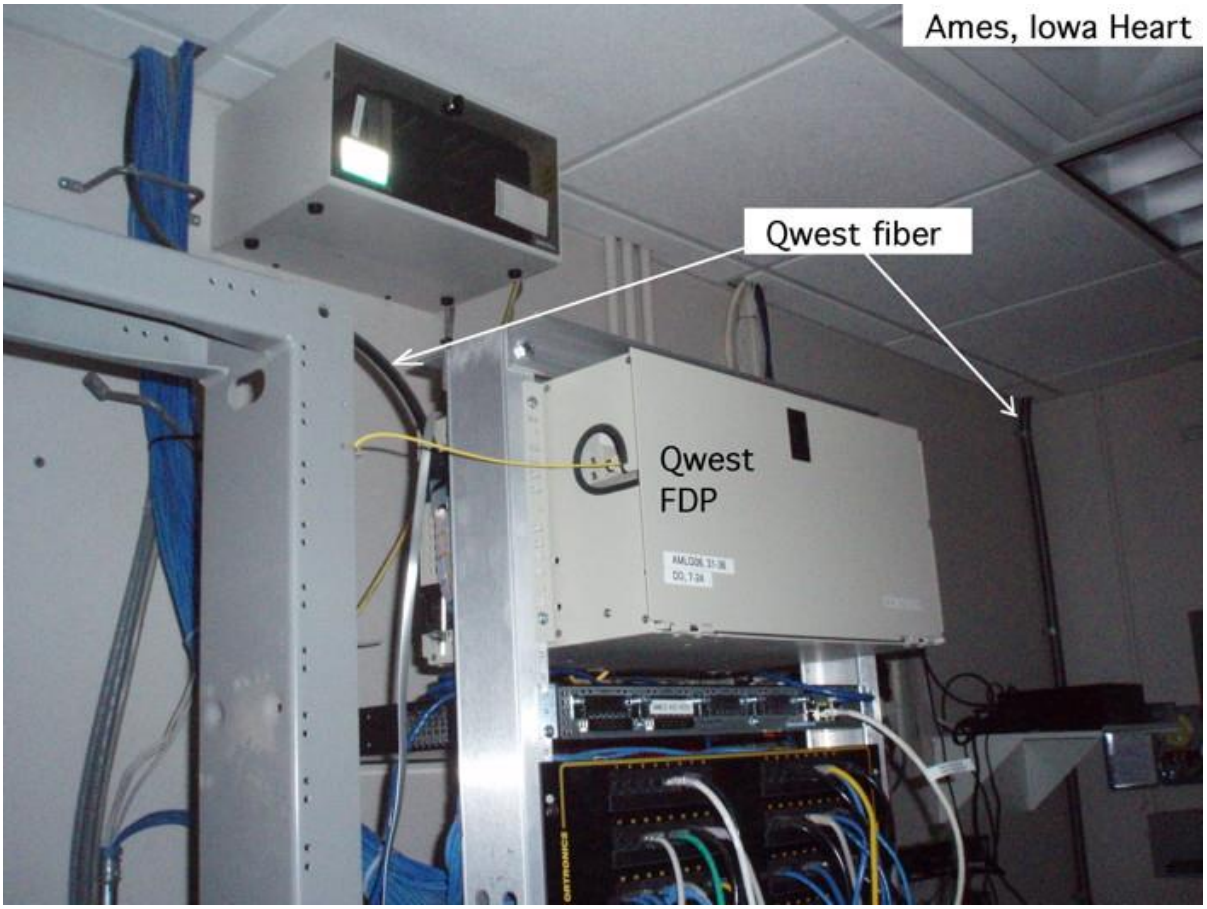
Ames, Iowa Heart
Qwest fiber
Qwest FDP

Ames, Iowa Heart
Qwest fiber entry

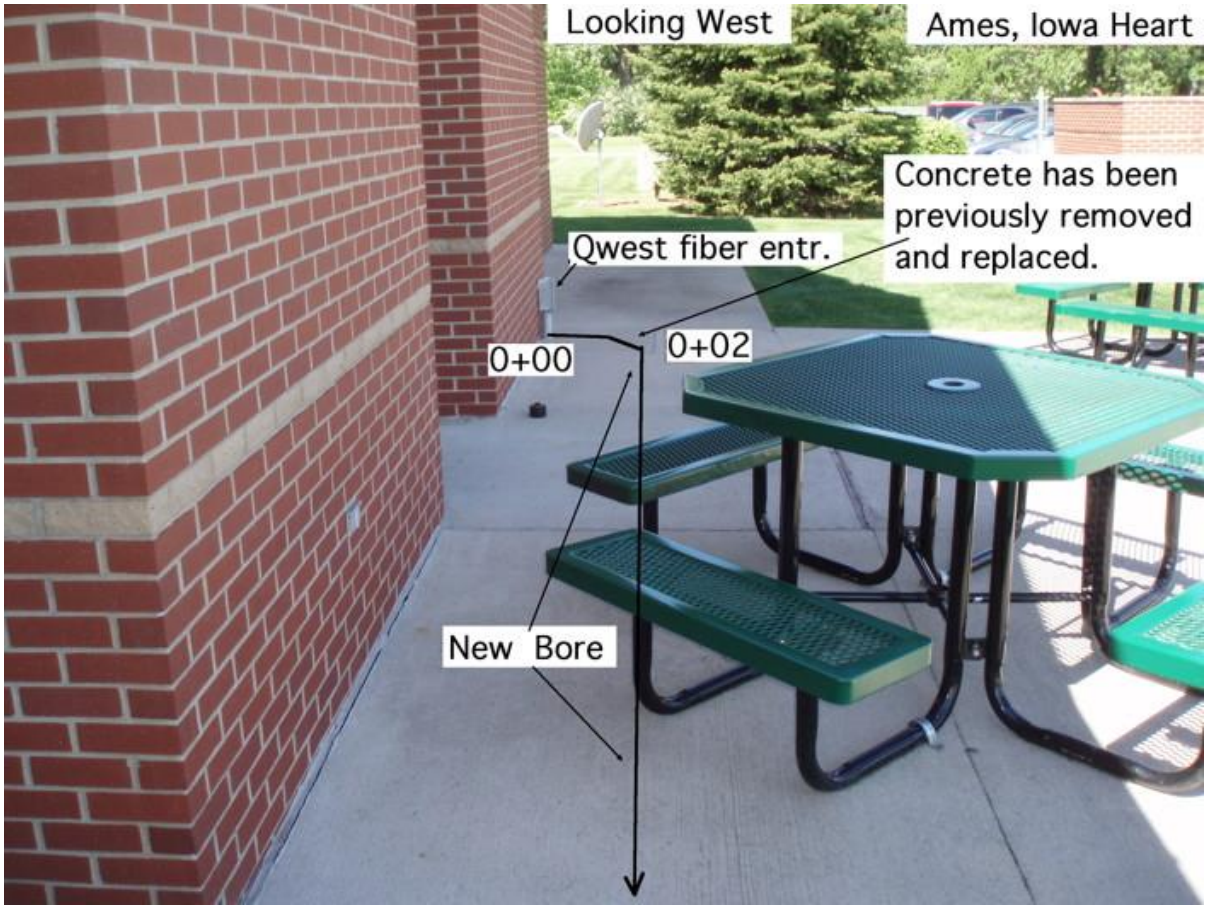
Looking West
Ames, Iowa Heart
Concrete has been previously removed and replaced.
Qwest fiber entr.
0+00
0+02
New Bore

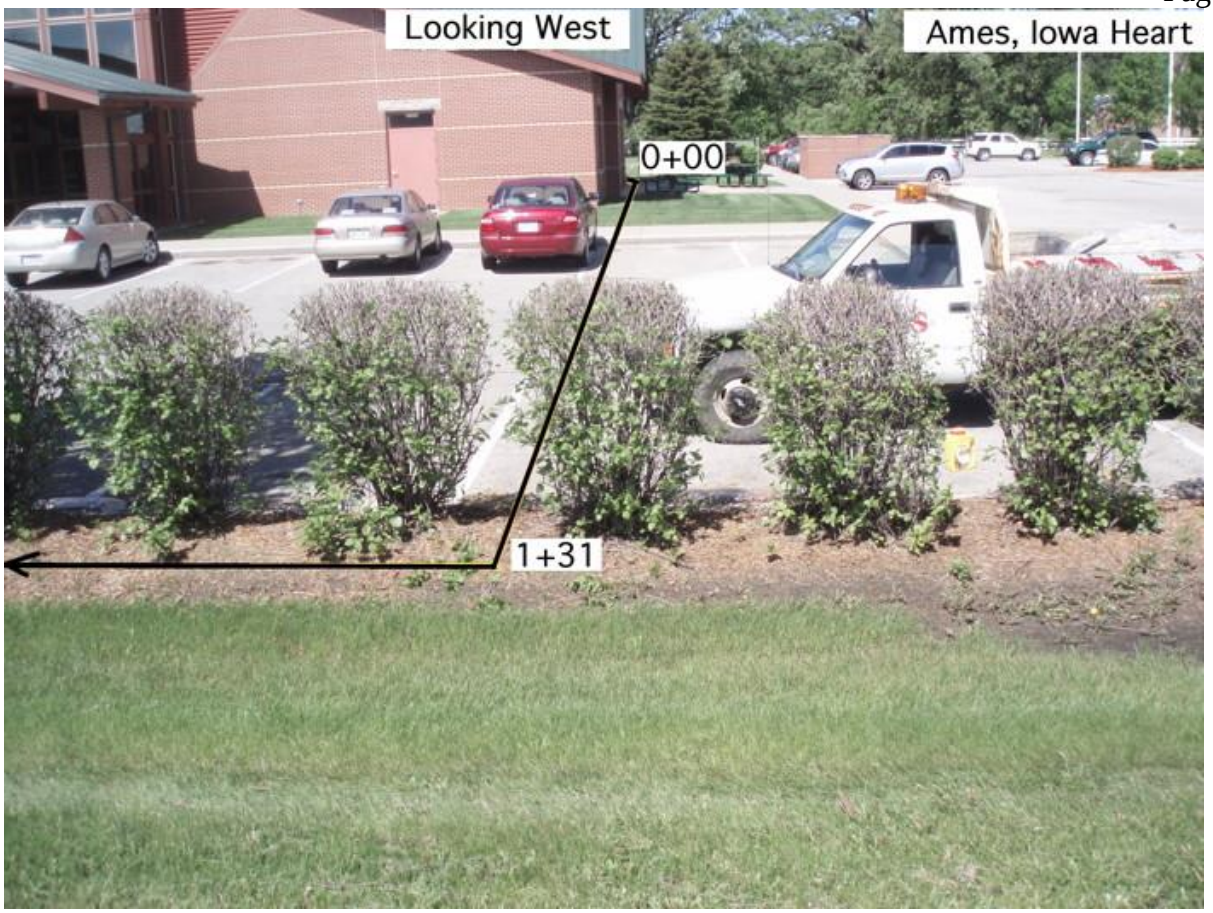
Looking West
Ames, Iowa Heart
0+00
1+31

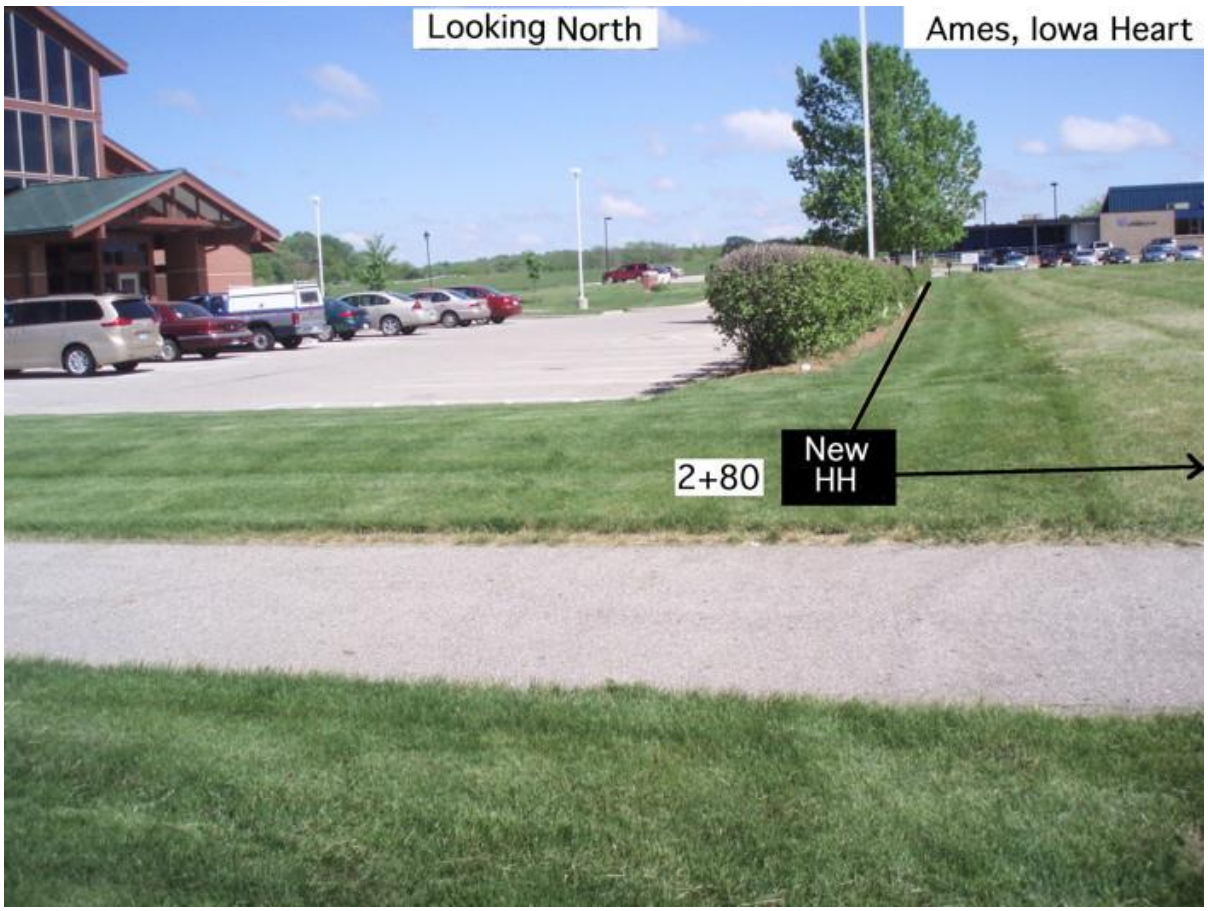
Looking North
Ames, Iowa Heart
2+80
New HH

Looking West
Ames, Iowa Heart
Fiber Route
2+80
5+17

Looking West
Ames, Iowa Heart
Fiber Route
2+80
6+44
6+76

Looking West
Ames, Iowa Heart
Fiber Route
6+76
8+10
8+35

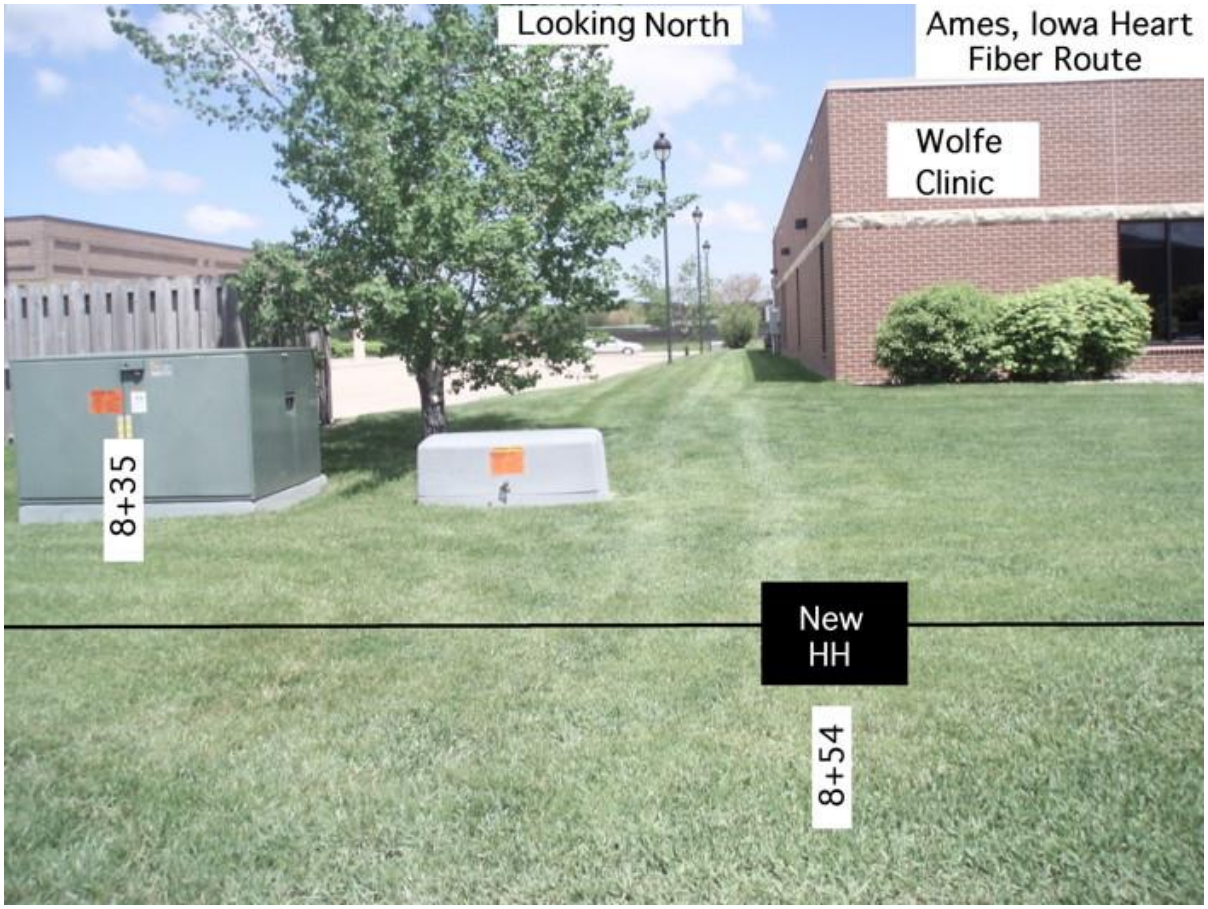
Looking North
Ames, Iowa Heart
Fiber Route
Wolfe
Clinic
8+35
New
HH
8+54

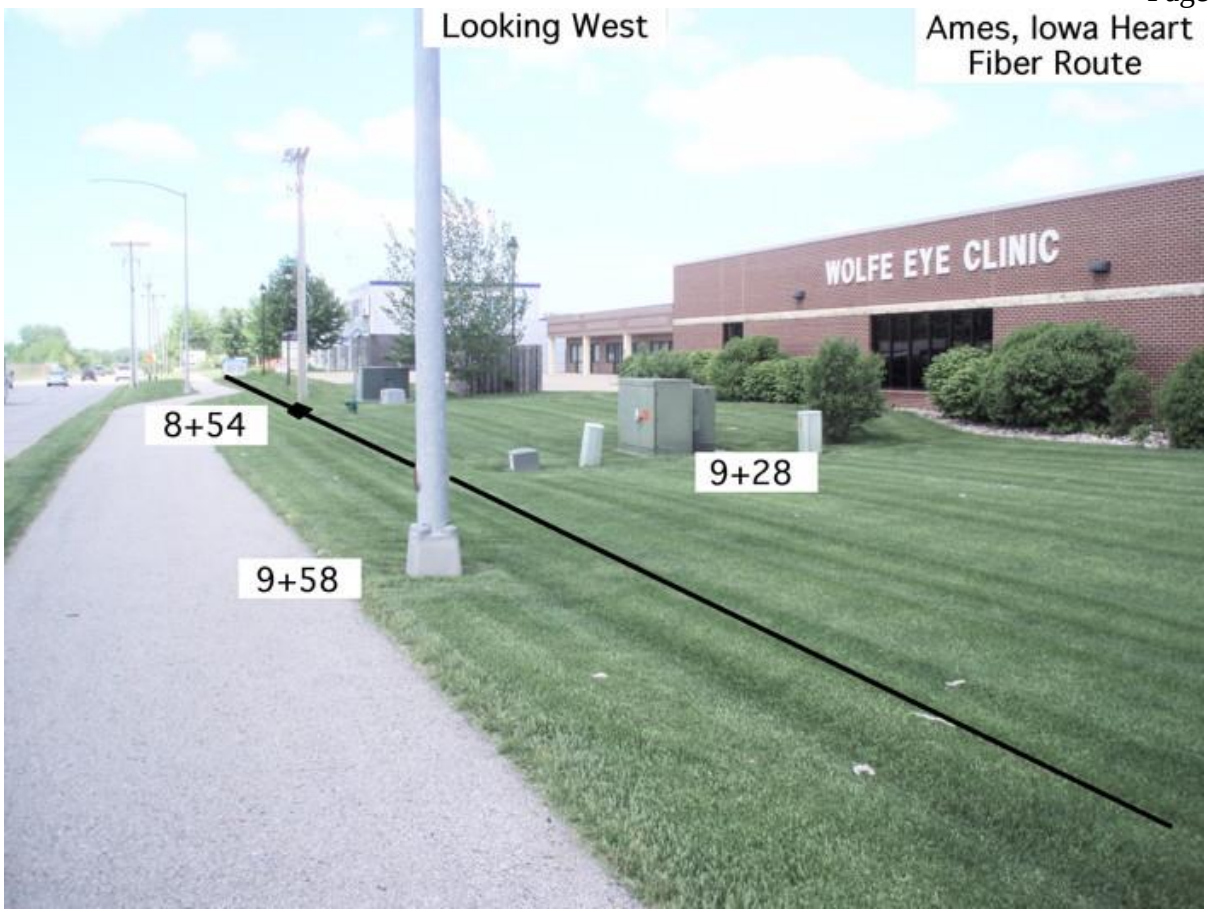
Looking West
Ames, Iowa Heart
Fiber Route
WOLFE EYE CLINIC
8+54
9+28
9+58

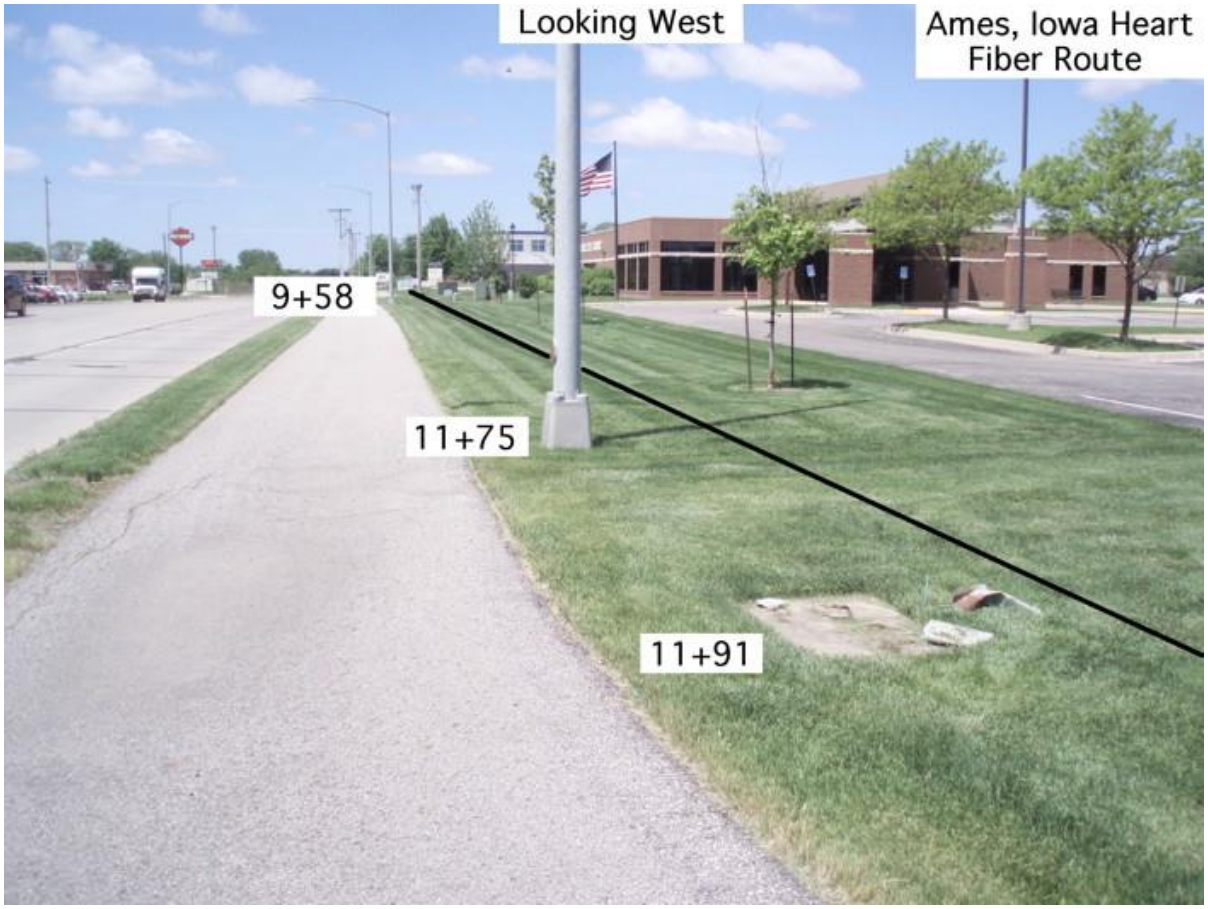
Looking West
Ames, Iowa Heart
Fiber Route
9+58
11+75
11+91

Looking West
Ames, Iowa Heart
Fiber Route
Eastgate Dr
11+91
12+75
13+82
Eastgate Dr.

Looking West
Ames, Iowa Heart
Fiber Route
HOSPITAL
13+82
15+95
16+19

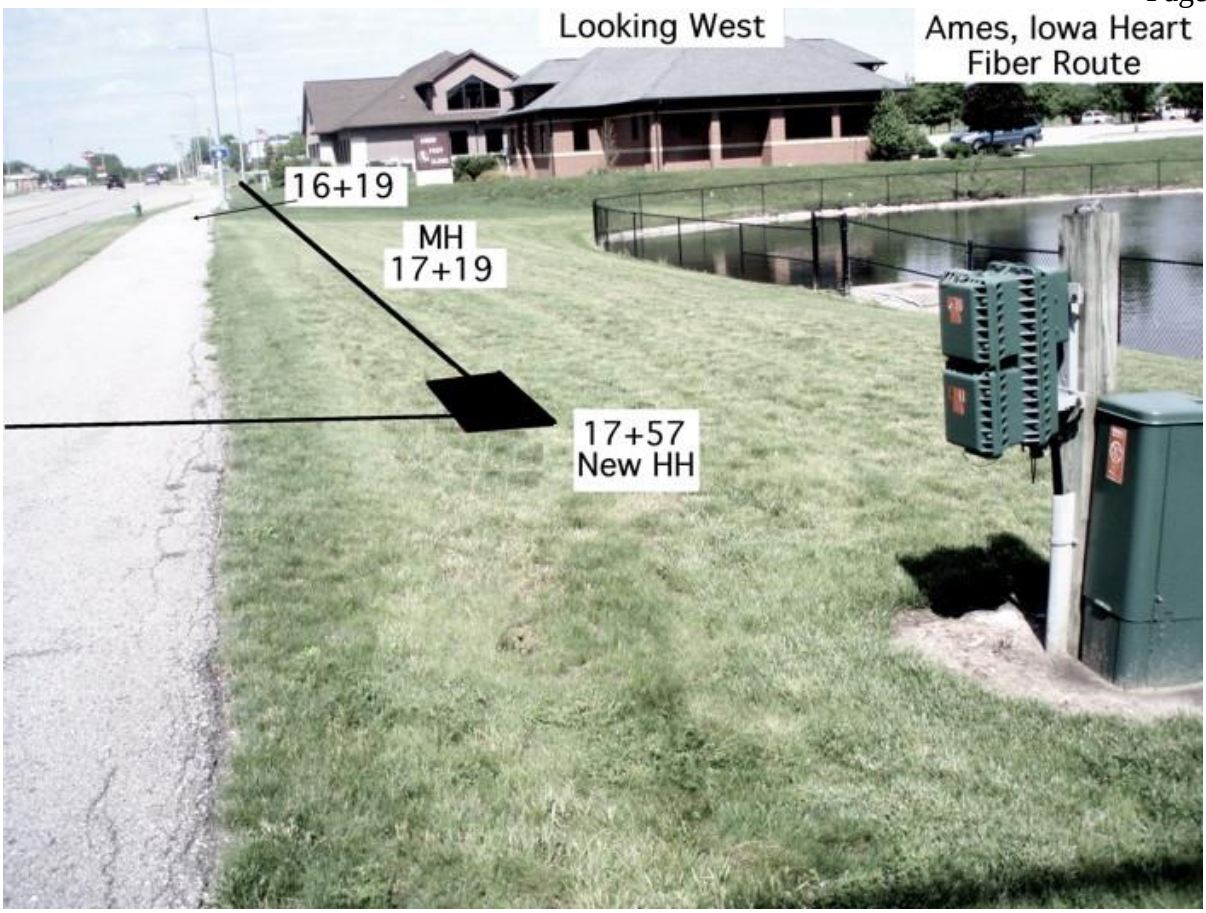
Looking West
Ames, Iowa Heart
Fiber Route
16+19
MH
17+19
17+57
New HH

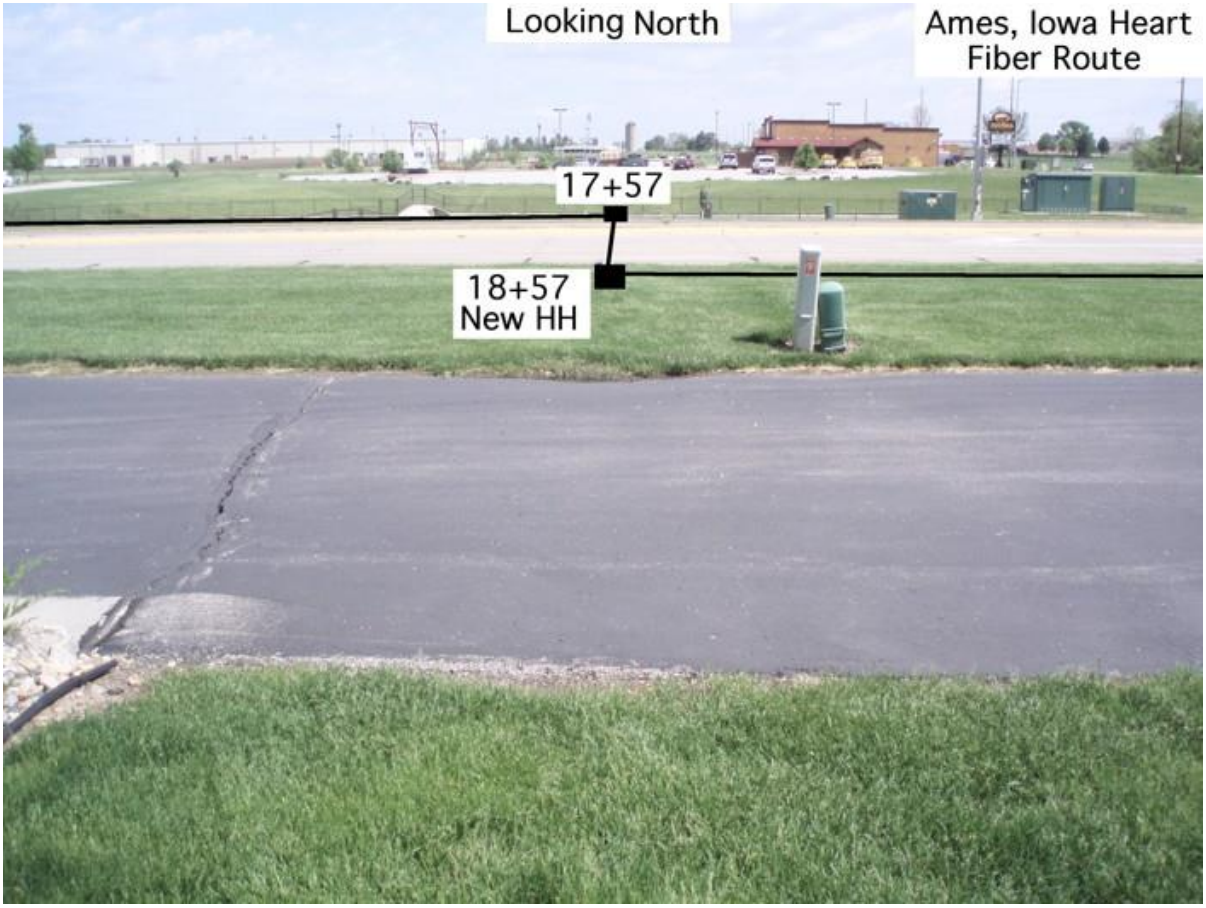
Looking North
Ames, Iowa Heart
Fiber Route
17+57
18+57
New HH

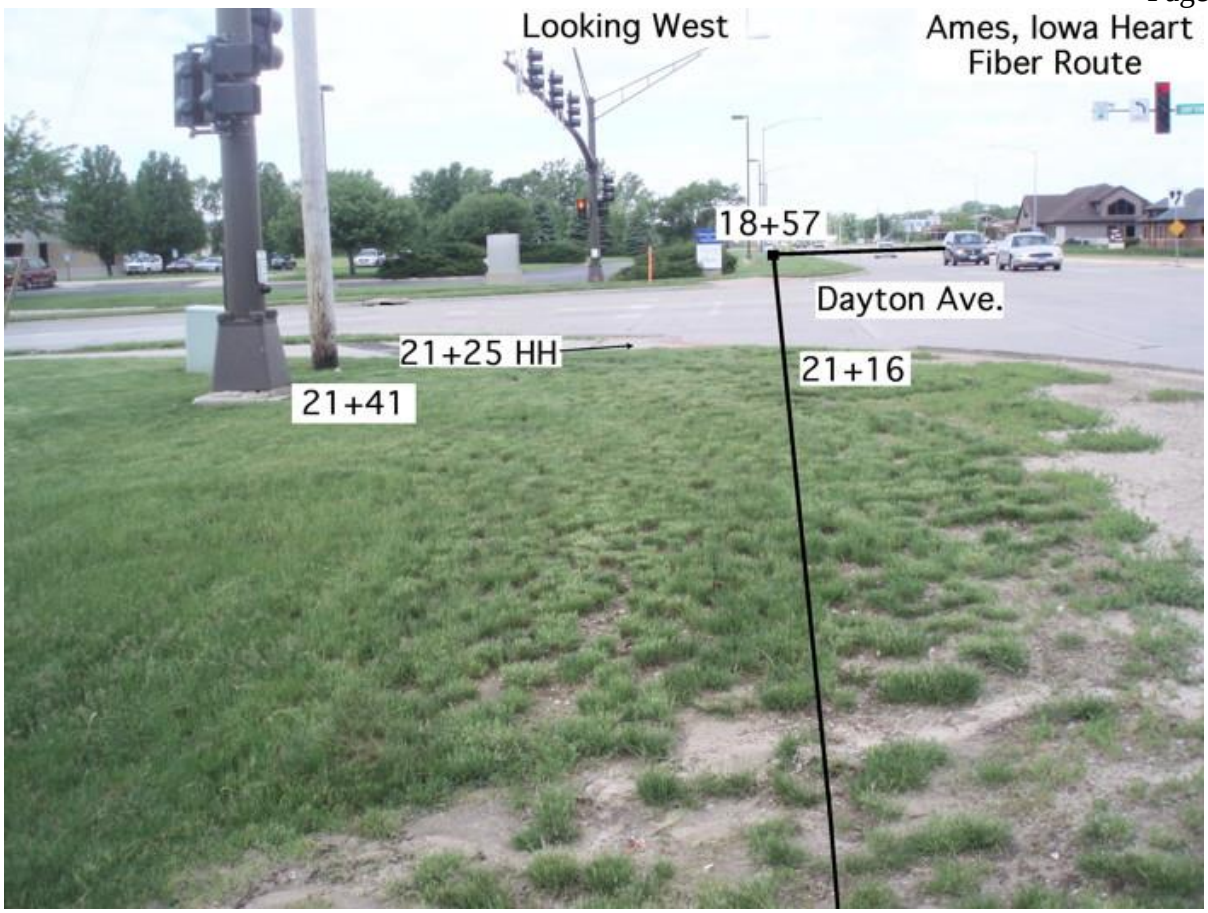
Looking West
Ames, Iowa Heart
Fiber Route
18+57
Dayton Ave.
21+25 HH
21+16
21+41

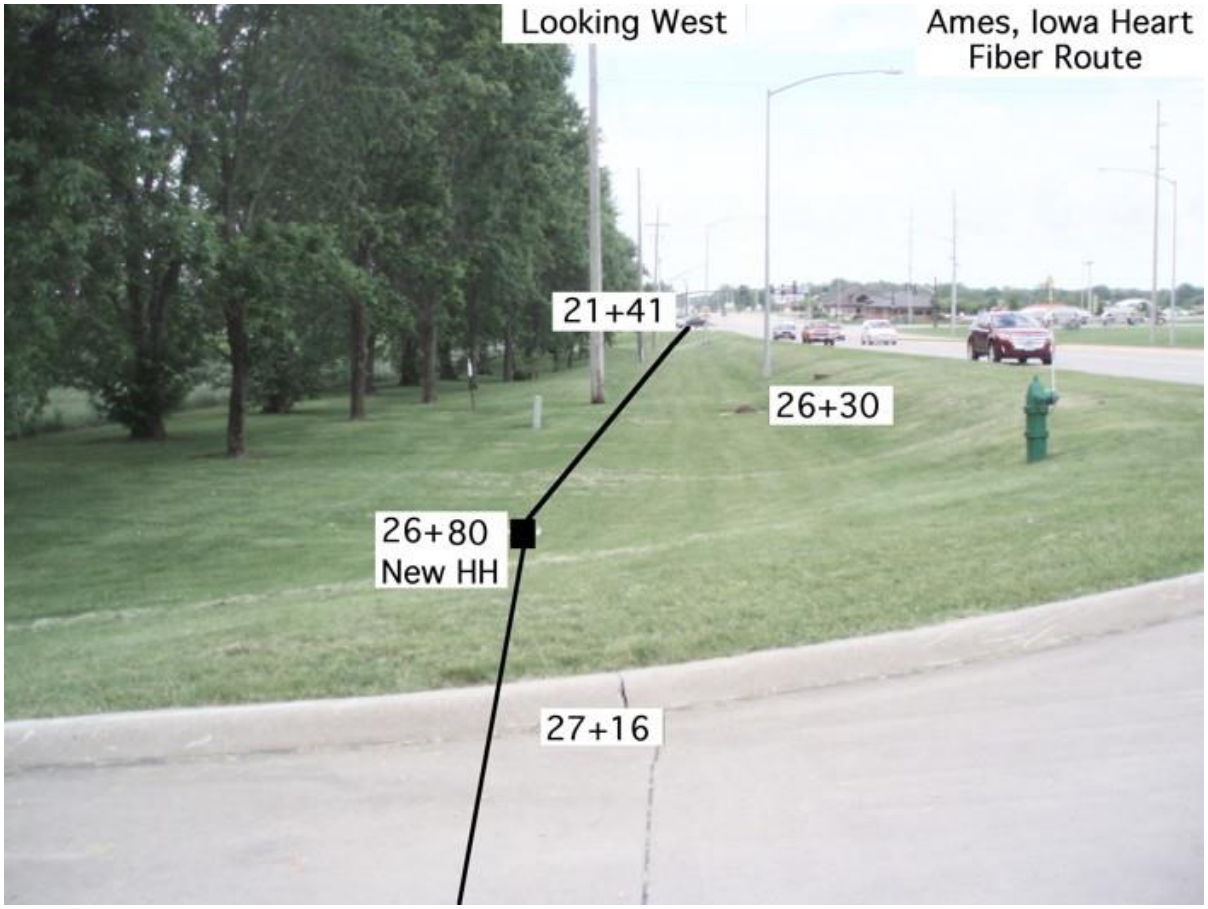
Looking West
Ames, Iowa Heart
Fiber Route
21+41
26+30
26+80
New HH
27+16

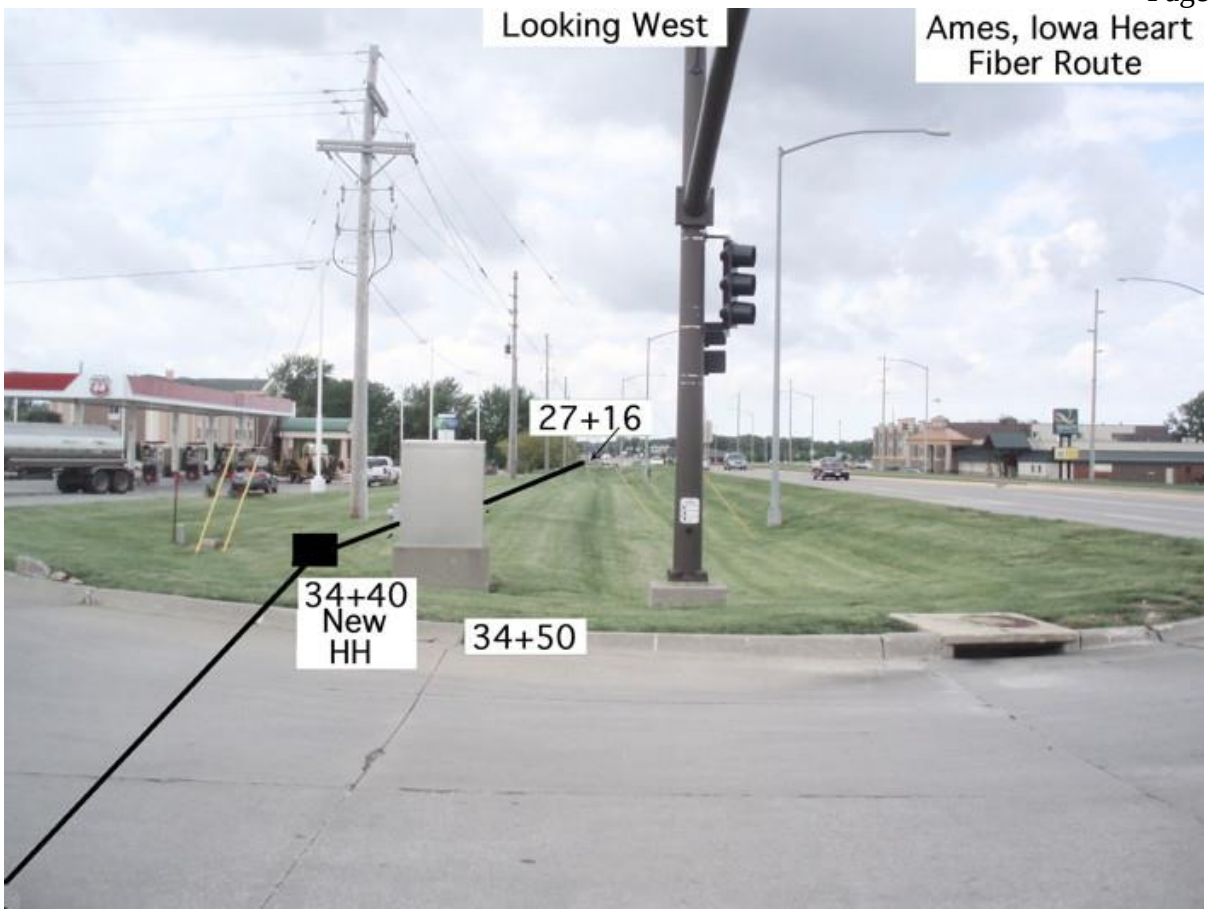
Looking West
Ames, Iowa Heart
Fiber Route
27+16
34+40
New
HH
34+50

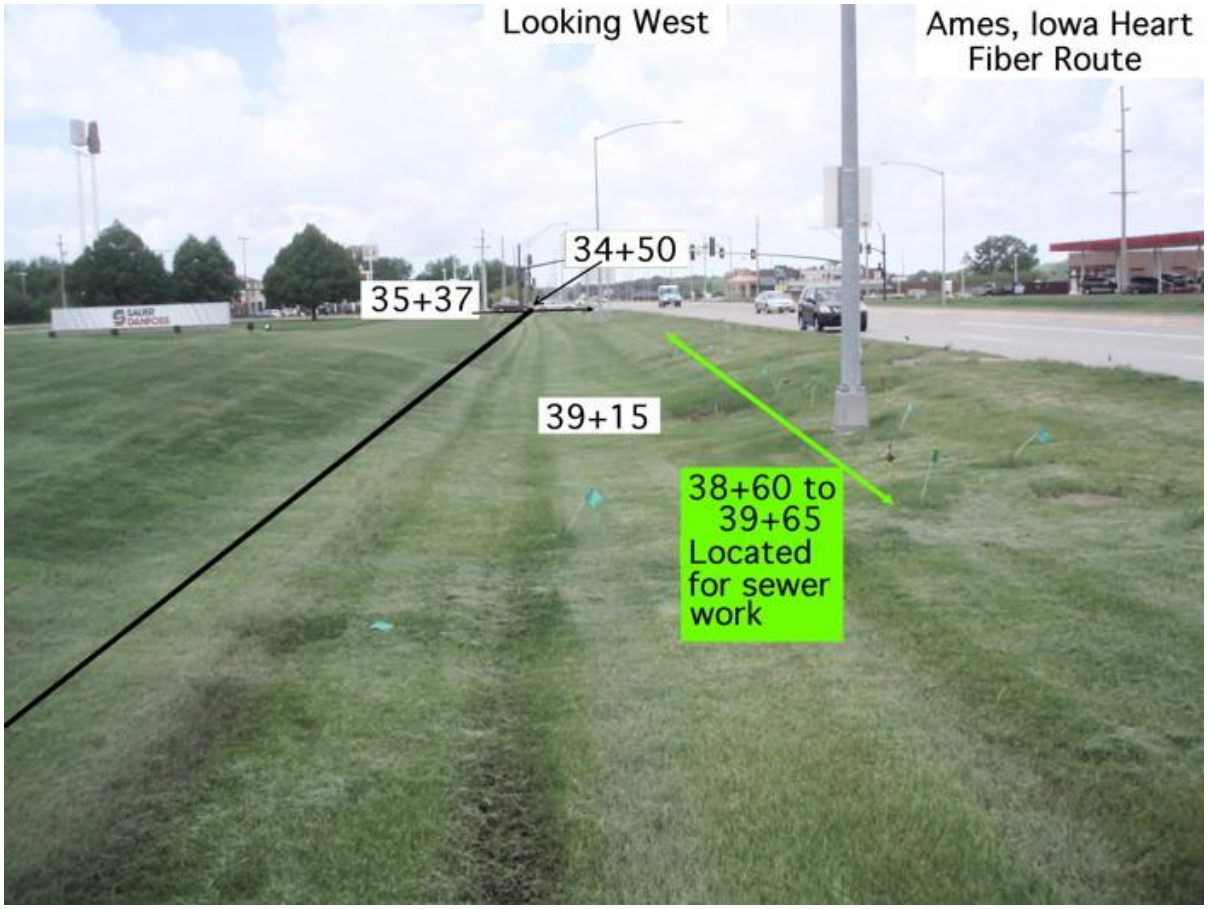
Looking West
Ames, Iowa Heart
Fiber Route
34+50
35+37
39+15
38+60 to
39+65
Located
for sewer
work

Looking West
Ames, Iowa Heart
Fiber Route
39+15
43+60

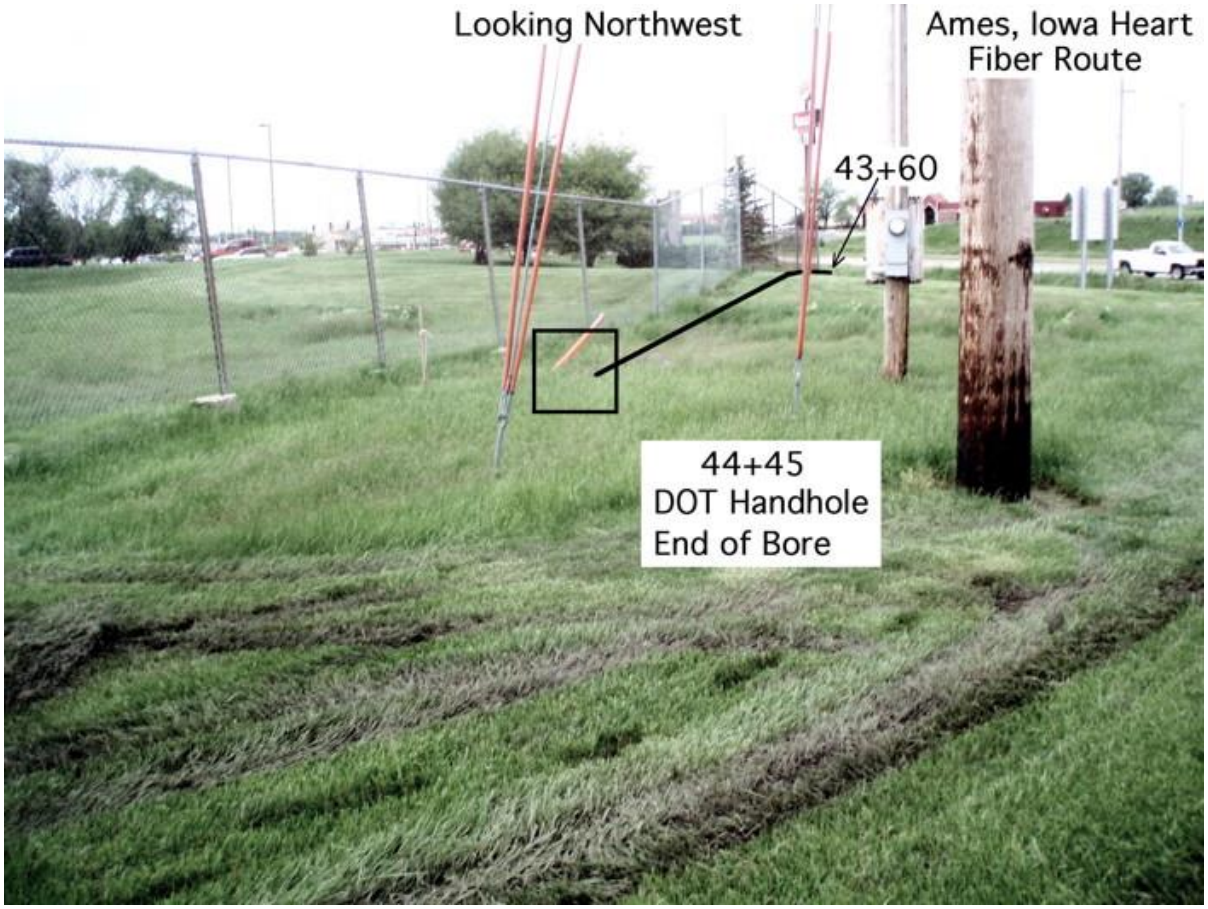
Looking Northwest
Ames, Iowa Heart
Fiber Route
43+60
44+45
DOT Handhole
End of Bore